
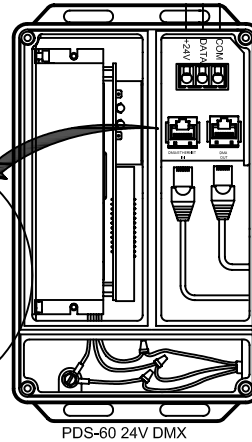
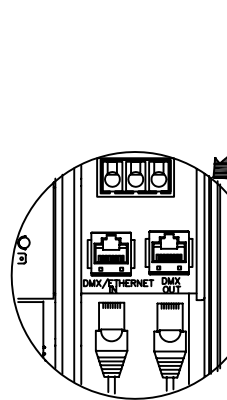
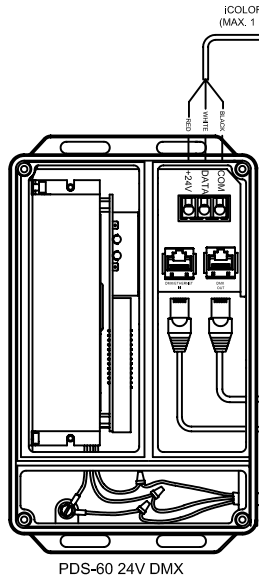
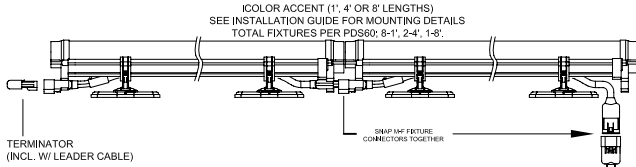


**NOTES:**

- EACH PDS-500s WILL SUPPORT 1 RUN OF ICOLOR ACCENT USING THE 50 FT. LEADER CABLES (SOLD SEPARATELY).
- EACH 50 FT. LEADER CABLE SUPPORTS A MAX. OF 8 LINEAR FT. OF ICOLOR ACCENT FIXTURES. FOR A TOTAL MAX. OF 8 L.F. PER PDS60 24V.
- TOTAL FIXTURES: 8- 1' ACCENT, 2- 4' ACCENT, 1- 8' ACCENT.
- USE A TERMINATOR (INCL. W/ LEADER CABLE) AT THE END OF EACH FIXTURE RUN.
- IF USING 1' JUMPER CABLES (SOLD SEPARATELY) YOU MUST SUBTRACT AND CUT TOTAL NUMBER USED FROM LEADER CABLE.



ICOLOR ACCENT (1', 4' OR 8' LENGTHS)  
SEE INSTALLATION GUIDE FOR MOUNTING DETAILS  
TOTAL FIXTURES PER PDS60: 8-1', 2-4', 1-8'

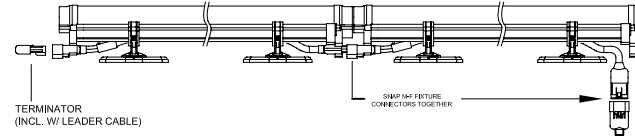

CONTINUE DMX OUT/IN SEQUENCE TO INCLUDE ALL PWR/DATA SUPPLIES, THEN TERMINATE THE LAST UNIT (SEE BELOW)

6' FLYING LEAD/RJ45 DATA CABLE (OR SEE PIN-OUT BELOW IF MAKING CABLES)

5' FLYING LEAD/BNC POWER CABLE

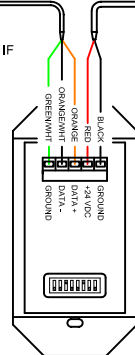

**NOTE:**


- USE AN IN-LINE DMX REPEATER AFTER EVERY 16th PDS UNIT IN A CHAIN, OR WHEN A DATA CABLE RUN BETWEEN UNITS EXCEEDS 400 FEET.
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 8-1', 2-4', 1-8'

**DATA TERMINATOR**



PLACE IN LAST DMX OUT PORT OF POWER/DATA SUPPLY CHAIN

**CAT-5/RJ45 PIN-OUT**



COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

**TITLE:**

SYSTEM WIRING DIAGRAM (TYP)

**PRODUCTS:**

ACCENT / PDS-60 24V / CD / PS-60

**DATE:**

DWG. BY: S.D.

SCALE: NTS

**REV:**

PAGE: 1 OF 1