

Date: _____
Type: _____
Firm Name: _____
Project: _____

SmartJack Pro

CONTROLLER

Ultra-compact USB-to-DMX converter with commissioning software

SmartJack Pro is a USB-to-DMX converter that enables control of your DMX-based lighting installation from a computer. Combined with QuickPlay Pro software, SmartJack Pro lets you assign and test light addresses, configure and test DMX addresses, and author basic light shows. SmartJack Pro is compatible with all Color Kinetics Intelligent Series color changing lighting luminaires.



- Easy to use — SmartJack Pro connects to any Windows PC or Mac via USB connection.
- Ultra-compact design — SmartJack Pro weighs less than one pound and has a form factor of 40 x 58 x 77 mm (1.58 in x 2.27 x 3.03 in).
- Bundled with QuickPlay Pro software — QuickPlay Pro allows light addressing, DMX addressing, light testing, power/data supply configuration, basic show authoring, and more.
- Import/export light address files — QuickPlay Pro supports import and export of comma-separated light address files.
- Automatic controller and luminaire detection — QuickPlay Pro automatically detects all connected controllers and luminaires.
- Four built-in, configurable effects — Create basic light shows using the fixed color, color wash, sweep, and streak effects.
- Additional options with QuickPlay Pro — When connected to an Ethernet network, QuickPlay Pro can address Ethernet-based luminaires. QuickPlay Pro is also compatible with iPlayer 3 for added DMX control and light addressing options.

For more information, please refer to
www.colorkinetics.com/ls/controllers/smartjackpro/

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Electrical

Power Requirement	300 mA input voltage supplied by USB
Computer Interface	Cable: USB 2.0, USB 1.2
Lighting System Network Interface	Network Protocol: DMX512 Data Connector: 5-pin XLR*

Capability

Supported DMX Channels	*Full 512-channel universe of input or output
Software Requirements	QuickPlay Pro†

* One XLR to RJ45 adapter is included with SmartJack Pro.

† Color Kinetics QuickPlay Pro light addressing software is included with SmartJack Pro or is downloadable at www.colorkinetics.com/support/addressing/

Physical


Dimensions <i>(Height x Width x Depth)</i>	40 x 58 x 77 mm (1.58 x 2.27 x 3.03 in)
Weight	0.29 kg (0.66 lb)
Operating Temperature	0 to 50 °C (32 to 122 °F)
Humidity	0 to 95%, non-condensing

Certification and Safety

Certification	FCC Class A, CE
Environment	Dry Location, IP20



Dimensions

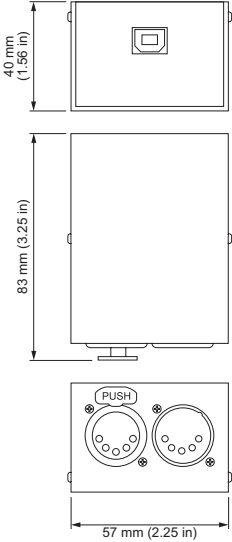

Part Numbers

Use Item Number when ordering in North America.

Controller

	Item Number	Item 12NC
SmartJack Pro	103-000024-00	910503700582
<i>SmartJack Pro controller, USB Cable, (1) XLR to RJ45 Adaptor, QuickPlay Pro Software CD, Installation Instructions</i>		

Accessories

Additional XLR to RJ45 Data Cable Adaptor	104-000005-00	910503700061
---	---------------	--------------



© 2019 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com