

Flex

Cover it all with points of light

Product Guide

a  signify brand

Flex



Cover almost any structure with flexible strands of bright LED nodes.



In this guide:

| | |
|-------------------------------------|----|
| Introduction | 2 |
| Design | 4 |
| What makes Flex different? | 6 |
| Meet the Flex family | 8 |
| Color Kinetics technologies | 11 |
| Flex Compact key features | 12 |
| Flex Micro key features | 14 |
| Flex Harsh Environment key features | |
| Complete solution | 16 |
| Showcase | 18 |
| Flex Compact specifications | 24 |
| Flex Micro specifications | 28 |


Flex means flexibility

Bringing light, color, and motion to a structure helps add beauty, get attention, and make an impact. But today's more adventuresome architecture can be a challenge for lighting designers who want to add direct-view lighting to a curved wall, domed ceiling, or other unusual surfaces.

Our innovative, proven Flex family of direct-view LED luminaires meets these challenges—from displaying messages on curved building façades to bringing stunning LED light shows to stadium roofs. All Flex luminaires consist of flexible strands of efficient, addressable LED nodes that can be arranged along a nearly limitless array of surfaces and structures. The flexibility continues with a wide range of choices—color or white light, varying brightness, node spacings, strand length, lens options, beam angles, and more.

No matter what Flex luminaire you choose, you can be confident that it will deliver high-quality LED light, ease of commissioning and installation, and proven reliability. That's why so many lighting designers choose Flex for their more ambitious, artistic installations.

At Color Kinetics, we've been delivering advanced direct-view lighting solutions for more than a decade, bringing new excitement, attention, and beauty to landmark buildings, bridges, stadiums, and other high-profile structures around the world. Our full family of direct-view LED luminaires creates bright, addressable points of light (the Flex family and ArchiPoint) and lines of light (the Accent family and Vaya Tube family) that can be mounted on the exterior of a structure, adding visual interest and transforming buildings into eye-catching icons. Our direct-view luminaires can also display video, exciting color graphical effects, and messages.

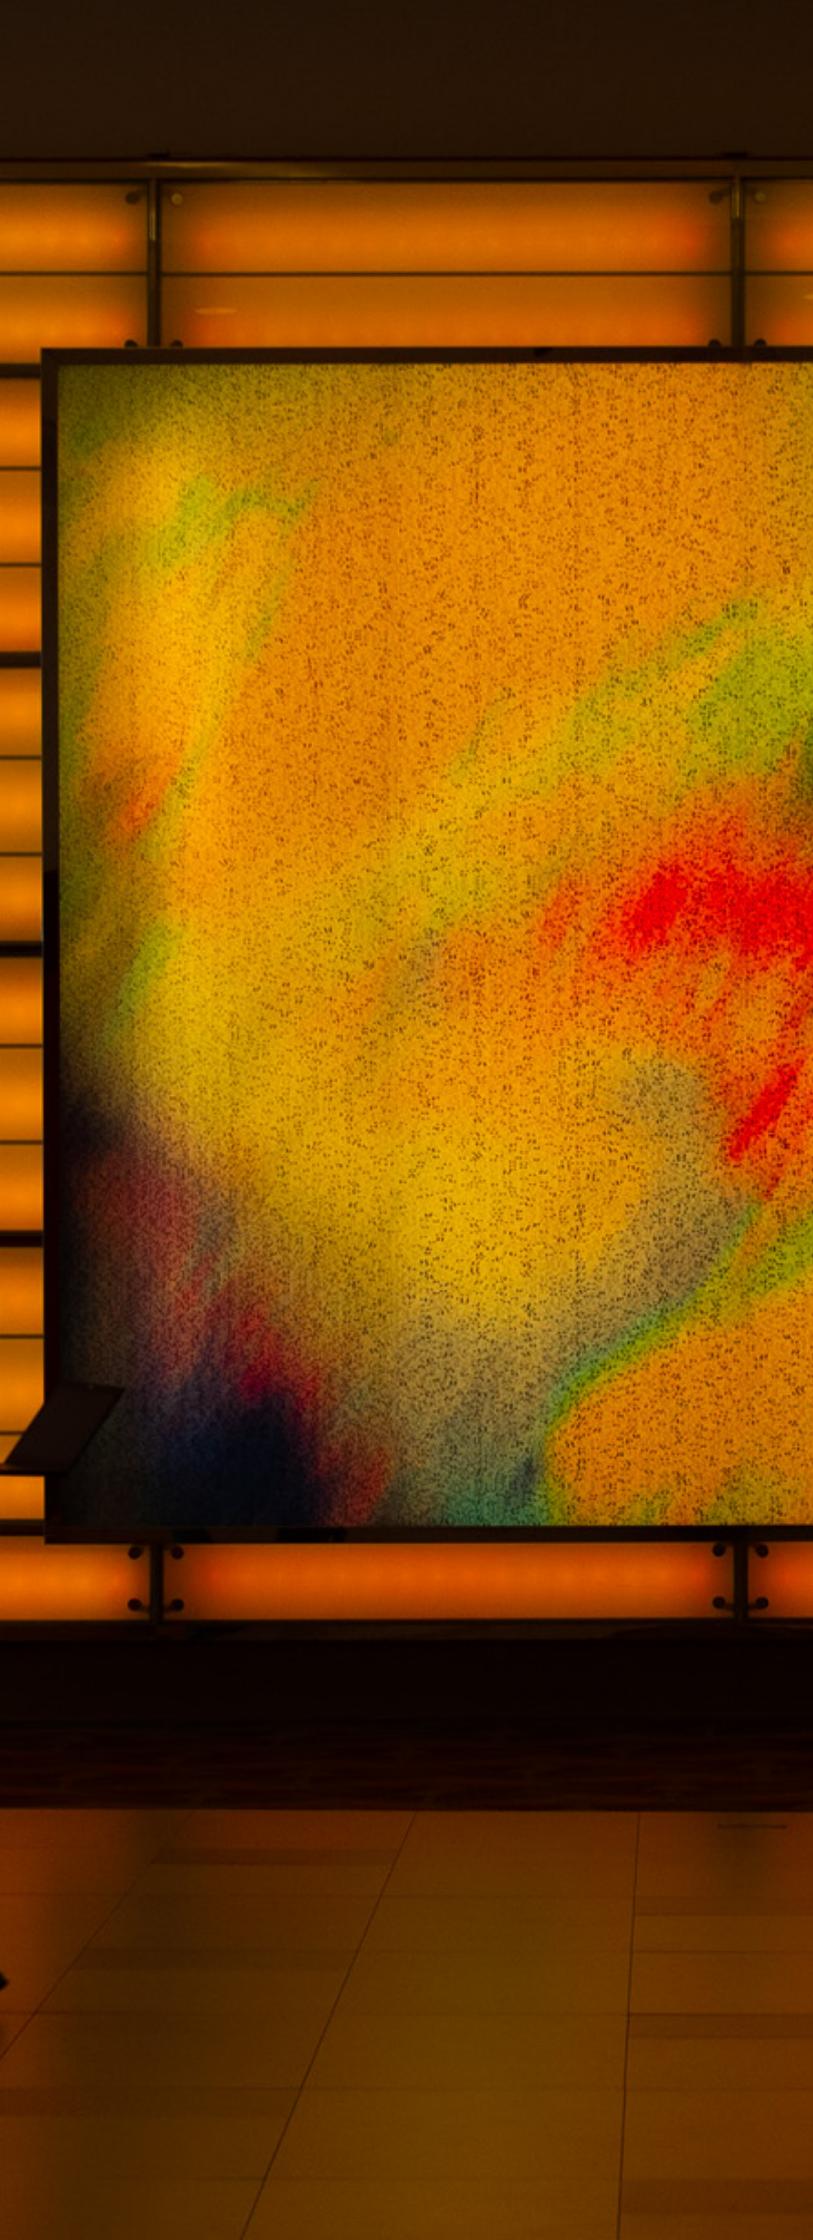

Created to meet the needs of the marketplace

The Flex family grew to meet the ever-changing needs of our customers—lighting designers, building owners, and other lighting professionals. We increased brightness, added new technical innovations, created new node designs and spacing, and created new options for strand length, lenses, power/data supplies, and other innovations. This commitment to innovation continues as the Flex family grows and evolves.

Ideal for a wide range of challenges

Every Flex direct-view installation is different. Some are informative, requiring bright white light to display important messages or upcoming events over a building entrance. Others seek to captivate an audience with stunning, full-color light shows on a large-scale surface—such as a stadium roof or curved façade.

And still others bring new light (and life) to iconic structures, such as monuments and bridges—even to landscape elements. To meet the varying needs of these exterior applications, Flex is durable and weather resistant. Its ability to bend and conform to almost any shape and dimension is a big advantage in interior and exterior applications.

From white to color, bright to brighter

Available in RGB, Intelligent White (iW), and Essential White (eW), Flex is right for a wide range of interior and exterior direct view implementations—including a large-scale low-resolution video on an exterior façade. You can choose the Flex solution that provides the right brightness, ensuring that your design makes an impact up close, and can be seen clearly from a distance.

Why do so many lighting designers choose Flex?

Flex is different from other luminaires—and, as many lighting designers tell us—more fun to work with.

Direct-view luminaires can do more than just illuminate a structure. They can add real excitement and engagement with attention-getting motion, animation, and even low-resolution video. Flex frees designers from the inherent limitations of rigid luminaires. Instead, Flex delivers the freedom to think beyond straight lines—and yes, more fun.

Each member of our extensive family of Flex luminaires provides these core advantages.

Flexibility

It's right there in the name. Flex means flexibility. Unlike linear luminaires, Flex gives you bendable, adjustable strands of LED nodes that you can configure and arrange as you see fit—from a consistent grid to complex geometries. Choose the brightness you need, the strand length that matches your structure, and the node spacing that delivers the right look and resolution.

Full Family of Solutions

With the Flex family, there are lots of choices—Flex Compact gen3, RGB and Flex Micro gen3, RGB for dynamic color changing light, Flex Compact, iW for tunable white light, and Flex Compact, eW and Flex Micro, eW for solid white light. Plus myriad options and choices. So you have the freedom to choose the exact direct-view luminaire that meets your needs.

Bright Output

We optimize our LED selection (see page 11) for maximum output and consistency, ensuring performance that goes well beyond comparable luminaires. Brighter output lets you take on larger structures and create ambitious designs that get noticed. And our lumen measurement complies with IES LM-79-08 testing procedures for consistency.

Easy Installation

Flex luminaires are exceptionally easy to get up and running, thanks to simple mounting and auto addressing for every node. So projects proceed smoothly—achieving impressive results in less time, with less complexity.

Proven Reliability

Fully sealed for maximum node life and IP66-rated for outdoor applications. All Flex luminaires are designed to be reliable, year after year—thanks to smart design, extensive testing, and years of experience. Flex luminaires can handle a wide range of conditions,—delivering dependable performance.

Have an extreme installation? Flex Harsh Environment luminaires feature nodes that are fully sealed in a UV resistant thermoplastic overmold designed especially [for coastal environments.](#)

Complete Solution

Advanced, reliable Flex luminaires are a critical part of your direct-view lighting solution, but it's not the only element that matters. That's why Color Kinetics offers a full range of complementary solutions—including power/data supplies, controllers, and much more. All designed and optimized to ensure seamless integration and years of trouble-free operation.



Photography: Mark Steele

Find the Flex luminaire that meets your needs

All Flex solutions are flexible strands of addressable LED nodes that feature dynamic integration of power and control. From there, Flex branches out into a range of solutions with specific capabilities designed to meet your needs.*

* Go to www.colorkinetics.com/Products/Application/Direct-View/ for more information about the Flex Family—including high-performance four-channel FlexElite luminaires, which feature a larger, brighter node.

Flex Compact gen3, RGB

Brightest color output for larger installations



Flex Compact gen3, RGB brings you large, high-intensity, full-color LED nodes designed for extraordinary effects and extensive installations. It's the right choice for large-scale signage, building-covering video displays, and other ambitious direct view projects. With bright full-color light output of up to 28.7 candela, your installation will be viewable from long distances—as well as daylight-visible for even more impact.

Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional marquee lenses, available in clear, semi-frosted, and translucent, snap on flat-lens nodes to make them look more like bulbs of a traditional theater marquee. For even more customization, Flex Compact gen3, RGB offers standard and custom strand lengths, node spacings, and leader cable lengths.

Flex Compact, iW

High-intensity tunable white LED nodes



Flex Compact, iW strands are designed for high-impact effects and large-scale direct-view exterior installations. Each compact node produces tunable white light output of up to 91.6 candela, making Flex Compact, iW exceptionally bright, daylight-visible—and suitable for viewing from a distance. And Flex Compact, iW nodes contain warm and cool white LEDs, so you can choose the right color temperature—from 2700 K to 6500 K. Since each Flex node is individually controllable, you can control and vary the tone and brightness of iW Flex nodes, creating a wide range of fascinating visual effects. When your application calls for bright, tunable white light, Flex Compact, iW is the right choice.

Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional marquee lenses, available in clear, semi-frosted, and translucent, snap on flat-lens nodes to make them look more like bulbs of a traditional theater marquee. These marquee lenses can be mounted in front of a substrate or directly to mounted strands.

Flex Compact, eW

Solid white light for all applications



Flex Compact, eW brings you strands of solid white LED nodes that can be installed across any interior or exterior surface, including walls, ceilings, floors, three-dimensional sculptures, set pieces, and more. Flex Compact, eW is also a great solution for low-resolution video.

With compact nodes that output light up to 89.6 candela (129,758 nits), Flex Compact, eW produces bright, daylight-visible light. When your application calls for solid white light, Flex Compact, eW is the right choice. Standard lens options include clear flat, translucent dome, and narrow beam lenses. Optional translucent flat, clear dome, narrow beam, semi-frosted flat, and semi-frosted dome lenses are available.

Flex Micro gen3, RGB

Bright color output in a flexible form factor



Flex Micro gen3, RGB features smaller, high-intensity full-color LED nodes that deliver daylight-visible light output of up to 3 candela. This output makes it appropriate for video displays and large-scale signage. Daylight visibility means that your design will be visible day and night, an important consideration for video, messaging, and other graphical installations.

Standard lens options include clear and translucent dome lenses and clear flat lens. Standard 50-node strands can be field-shortened, and custom lengths of 1 to 60 nodes are also available.

Flex Micro, eW

Small but powerful white light nodes



Flex Micro, eW is a versatile strand of 50 small, individually controllable LED nodes that deliver solid white light, outputting up to 10.5 candela and 7,529 nits per node. Flex Micro, eW can be installed across interior or exterior surfaces, including walls, ceilings, floors, three-dimensional sculptures, set pieces, and more. Flex Micro, eW's small size makes it appropriate for low-resolution video.

Daylight visibility means that your design will be visible day and night, an important consideration for video, messaging, and other graphical installations.

Flex Micro, eW strands are available with standard on-center node spacing of 102 mm (4 in) or 305 mm (12 in). Strands can be mounted directly to a surface. Detachable leader cables in multiple lengths allow you to install strings at the appropriate distance from power/data supplies.

| | Compact gen3, RGB | Compact, iW | Compact, eW | Micro gen3, RGB | Micro, eW |
|------------------------------|-------------------|-----------------|-----------------|-----------------|--------------|
| Power consumption (per node) | 1 W | 1 W | 1 W | 0.43 W | 0.5 W |
| Viewing angles | 36°, 105°, 165° | 36°, 105°, 165° | 36°, 105°, 200° | 105°, 165° | 105°, 165° |
| Lumens per node | 11.5 to 33.3 | 28 to 80 | 35 to 87 | 3.8 to 7.7 | 17.5 to 27.8 |

Our advanced technologies raise the bar

Color Kinetics is setting new standards for consistency and accuracy by developing advanced technologies that are integrated into our luminaires, including our Flex family. These technologies work together to deliver ever-escalating levels of quality, performance, and accuracy required for your most innovative and ambitious projects.

Optibin

Our LED optimization technology begins the color consistency process by grouping (or binning) LEDs by flux as well as center wavelength. This proprietary binning optimization process uses an advanced bin selection formula that exceeds industry standards for chromaticity. The result? Higher uniformity and consistency of hue and color temperature for all our luminaires. Integrated into all Flex luminaires.

Chromatic

Our custom-designed and patented microchip is the fast-thinking brain at the core of our intelligent luminaires, integrating power, communications, and control. About the size of a pencil eraser, Chromasic enables precise, pixel-level control of even the most complex lighting project. Unequaled simplicity, billions of colors, proven reliability, new possibilities—Chromatic delivers it all and more in a single silicon chip. At the core of all Flex luminaires.

To find out how innovative technologies within our advanced luminaires can help you do more visit www.colorkinetics.com/Learn.

Color and White options

Flex luminaires create dots of intense, high-quality dynamic color, or white light, depending on your needs. Flex Compact gen3, RGB and Flex Micro gen3, RGB bring exceptional dynamic color light via iColor technology. Flex Compact is also available in tunable IntelliWhite (iW), and Flex Compact and Flex Micro, eW are available in Essential White models for exceptional white light.

Flex Compact

RGB 

Standard option for intensely saturated color light.

iW (IntelliWhite) 

Tunable white light in a range of color temperatures from 2700 K to 6500 K.

eW (Essential White) 

White light in one of seven color temperatures—2700 K, 3000 K, or 4000 K.

Flex Micro

RGB 

Standard option for intensely saturated color light.

eW (Essential White) 

White light in 3000 K or 4000 K color temperatures.

What makes Flex Compact so customizable—and flexible

Durable and weather-resistant

All Flex nodes are sealed for maximum node life and water-resistance—IP66-rated for outdoor applications.

Optimized nodes

Choose the node that outputs the light (color, tunable white, or white) and brightness that match your specific needs.



Maximum flexibility

Flex node strands can be field-shortened, to customize the string required for your installation. (Flex Harsh Environment strings are not field-trimmable).

Standard and optional lenses

Each Flex solution offers a range of standard lens options, as well as optional lenses—ensuring that your implementation looks fantastic, up close and from a distance.

Standard and custom spacing and lengths


Flex lets you choose the node spacing length that works best for your implementation.

Standard 50 nodes with 102 mm (4 in) or 305 mm (12 in) on-center node spacing.

Custom 1 to 60 nodes are available with 76 mm (3 in) to 610 mm (24 in) on-center node spacing.

Adaptable mounting

Flex nodes can be mounted directly on a surface or substrate, arranged as needed—in uneven node spacing and complex geometries, or optional mounting tracks to ensure straight linear runs.

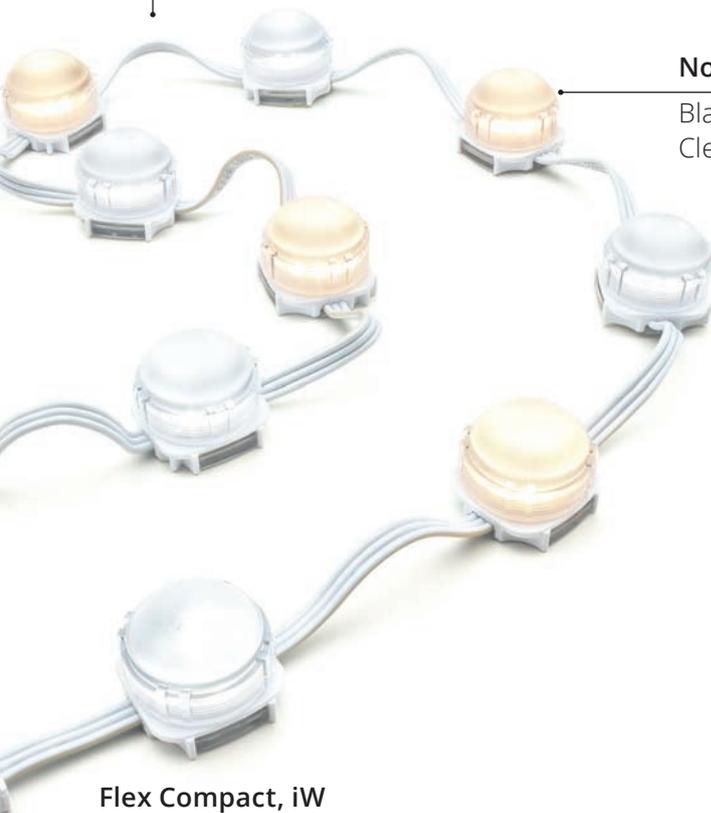


Node/cable colors

Black and white.
Clear available as custom


Flex Compact, iW




Flat Lens
Clear or semi-frosted
Viewing angle—105°



Narrow Lens
Viewing angle—36°



Dome Lens
Semi-frosted or translucent
Viewing angles
165° (Flex Compact gen3, RGB,
Flex Compact, iW)
200° (Flex Compact, eW)



**Optional
Marque Lens**
Clear semi-frosted,
or translucent

What makes Flex Micro so flexible—and reliable

Durable and weather-resistant

All Flex nodes are sealed for maximum node life and water-resistance—IP66-rated for outdoor applications.



Flex Micro gen3, RGB

Standard and optional lenses

Flex Micro is available in clear and translucent dome lenses and clear flat lens.

Standard and custom spacing and lengths

Standard 50 nodes with 102 mm (4 in) or 305 mm (12 in) on-center node spacing.

Custom 5 to 72 nodes are available with 51 mm (2 in) to 610 mm (24 in) on-center node spacing.

Maximum flexibility

Flex node strands can be field-shortened, to customize the string required for your installation. (Flex Harsh Environment strings are not field-trimmable).

Adaptable mounting

Flex nodes can be mounted directly on a surface or substrate, arranged as needed—in uneven node spacing and complex geometries, or optional mounting tracks to ensure straight linear runs.




Node/cable colors

Black and white.
Clear available as custom

Flex Micro, eW



Flat Lens
Clear or translucent
Viewing angle—105°



Dome Lens
Clear or translucent
Viewing angle—165°

What makes Flex Harsh Environment so unique

Outdoor Rated

As the name implies, Flex Harsh Environment excels in any hostile environment such as coastal locations where dust, humidity, corrosion, and temperature shifts are often found.



Flex Compact Harsh Environment gen3, RGB

Proven Reliability

Flex HE provides the same standard and custom Flex Compact or Flex Micro node options in a package built for harsh environments.

Maximum protection

Every node, terminator, and connector are fully sealed in a UV resistant thermoplastic overmold.

Adaptable mounting

Flex Harsh Environment nodes can be mounted directly on a surface or substrate with optional individual node holders, or mounting tracks and spacers to ensure straight linear runs and a clean look.



Flex Micro Harsh Environment gen3, RGB

Same great Flex nodes, Maximized

All Flex luminaires are IP66-rated for outdoor applications and designed to be reliable—thanks to smart design, extensive testing, and years of experience.

Flex Harsh Environment luminaires are traditional Flex Compact and Flex Micro LED nodes that are fully sealed in a UV resistant thermoplastic overmold. Flex HE luminaires comply with Corrosion Resistance standard ASTM B117 standard for > 3,000 hours.

With every node, terminator, and connector overmolded Flex HE strings are not field-trimmable.

Flex HE luminaires can handle a wide range of extreme conditions, such as dust, humidity, corrosion, and temperature shifts typically found in coastal locations and other extreme environments.

Flex Compact gen3 Harsh Environment, RGB Clear Flat Lens



Flex Compact gen3 RGB, Clear Flat Lens



Exceptional lighting takes more than a luminaire

To unlock the full potential of your Flex luminaires, you need the right components to power and control them. Color Kinetics completes your solution with:

Controllers

Our broad line of controllers brings you differing capabilities that match your specific needs, the complexity of your project, and your budget. Our controllers offer the industry-standard DMX protocol, or our proprietary, scalable KiNET protocol for Ethernet networks. Because of addressing limitations, DMX is appropriate for relatively simple installations, or for light shows in which multiple Flex luminaires operate in unison.

Because it is not subject to DMX addressing limitations, Ethernet is the preferred environment for intricate color-changing light shows using Flex Compact gen3, RGB or Flex Micro gen3, RGB. All Flex solutions work seamlessly with our full range of controllers, including Light System Manager, Video System Manager Pro, iPlayer 3, Antumbra iColor Keypad, and ColorDial Pro, as well as third-party DMX controllers.




Power/Data Supplies

We pair each Flex luminaire with the right power/data supply, delivering the power and data needed for your project, ensuring exceptional operation, and maximizing run lengths.

Monitoring and Management

Interact Landmark (formerly Philips ActiveSite) is the first-ever cloud-hosted connected lighting system for architectural LED lighting installations. Interact Landmark allows you to remotely monitor, manage, and maintain an installation site from anywhere in the world, using a secure web connection.

Immerse yourself in digital art at the city by the bay

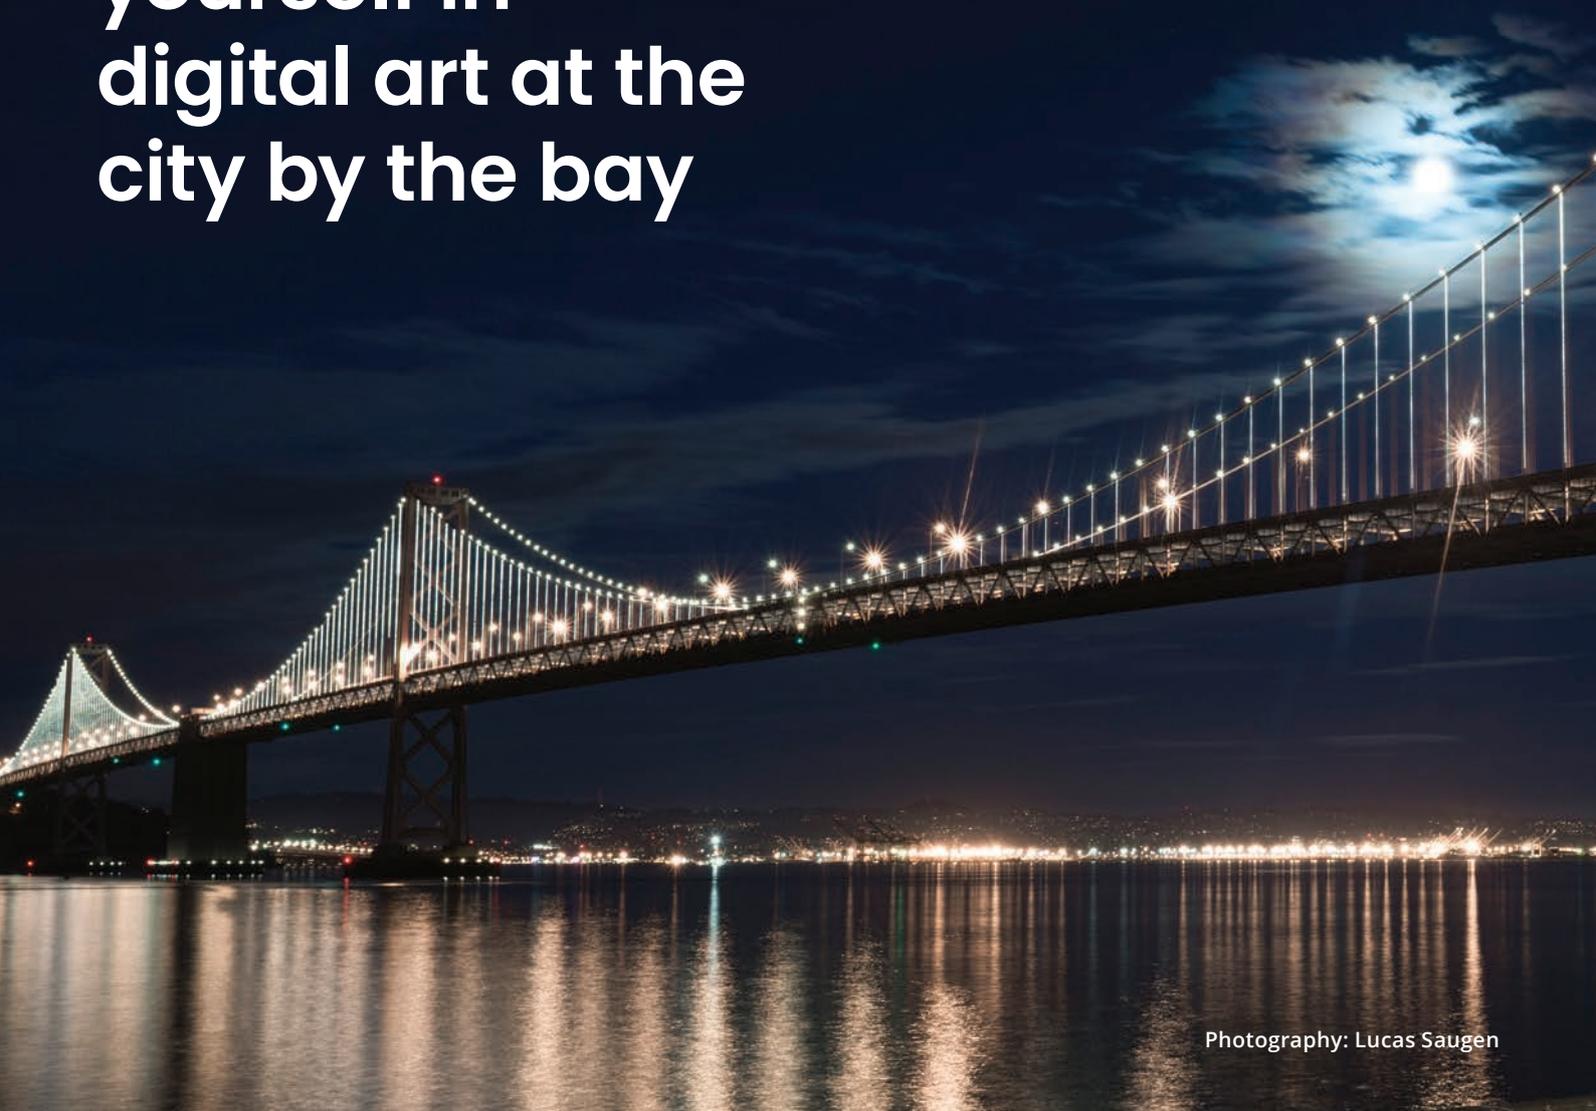

Photography: Lucas Saugen

Considered the largest LED lighting sculpture in the world, The Bay Lights is a popular and permanent part of the San Francisco Bay area.

This living sculpture uses 25,000 nodes of Color Kinetics Flex Compact Harsh Environment, eW, selected because of its ability to withstand harsh weather. The installation also incorporates ActiveSite, our cloud-based connected lighting platform, which enables more efficient management of the iconic landmark—including remote diagnostics, reporting, data analytics, and control.

| | |
|----------------|------------------------------------|
| Product | Flex Compact Harsh Environment, eW |
|----------------|------------------------------------|

Eye-popping light transforms a Warsaw landmark



Photography: Signify Poland

Color Kinetics illuminates the second tallest skyscraper in Poland with more than 80,000 individually controllable Flex Compact gen3, RGB light points.

This 220 m (722 ft) skyscraper, located in the heart of Warsaw's business district, is the largest installation of Color Kinetics technology in Central Eastern Europe. Dynamic content displayed on the Flex installations—including images and messages—is visible within a radius of several kilometers throughout Warsaw.

| | |
|----------------|--|
| Product | Flex Compact gen3, RGB |
| Details | 80,000 nodes used to create two screens 71 m (233 ft) by 39 m (128 ft) |

Lighting an undulating three-story lantern



Photography: © James Newton

Flex transforms the glazed lantern structure that spans the 5th to the 7th story of the building on the corner of Oxford and Soho Streets in London's prime shopping district.

Forty-five custom length strands ranging from 26 nodes to 71 nodes were installed inside the lantern and attached to a specially designed frame that follows the undulating glass. A controller manages a series of lighting scenes based on the seasons and nature that display automatically throughout the year and specific scenes that mark holidays and other special days.

| | |
|----------------|--|
| Product | Flex Micro gen2, RGB |
| Details | Forty-five custom length strands ranging from 26 nodes to 71 nodes |

Crystal glasses shine in hotel lobby



Photography: Hyersonic and Sosolimited

The lobby of Baccarat's opulent, 50-story flagship hotel features an innovative lighting installation.

It integrates 1,824 of Baccarat's famous Harcourt crystal glasses and 40 strands of Flex Compact gen3, RGB nodes. This wall shimmers with dynamic color and shifting background images that reflect the mood of the hotel and time of day—from geometric shapes to candlelight. It also displays periodic animations that surprise and delight hotel guests.

| | |
|----------------|--|
| Product | Flex Compact gen3, RGB |
| Details | 1,824 Harcourt glasses are beautifully illuminated by 900 plus nodes of Flex Compact gen3, RGB |

Moscow mall mirrors Times Square billboards



Photography: Gleb Igrunov


This massive shopping mall and entertainment complex features an imaginative lighting project that is the first and largest of its kind in Russia.

Flex Compact gen3, RGB nodes are mounted on VEGAS Crocus City's ventilated façade—transforming its media façade into a vibrant, full-colored spectacle. Managed from a single location, the façade can be programmed with text, images, and color effects for decorative, entertainment, or commercial purposes.

Product

Flex Compact gen3, RGB

College faces become large-scale art

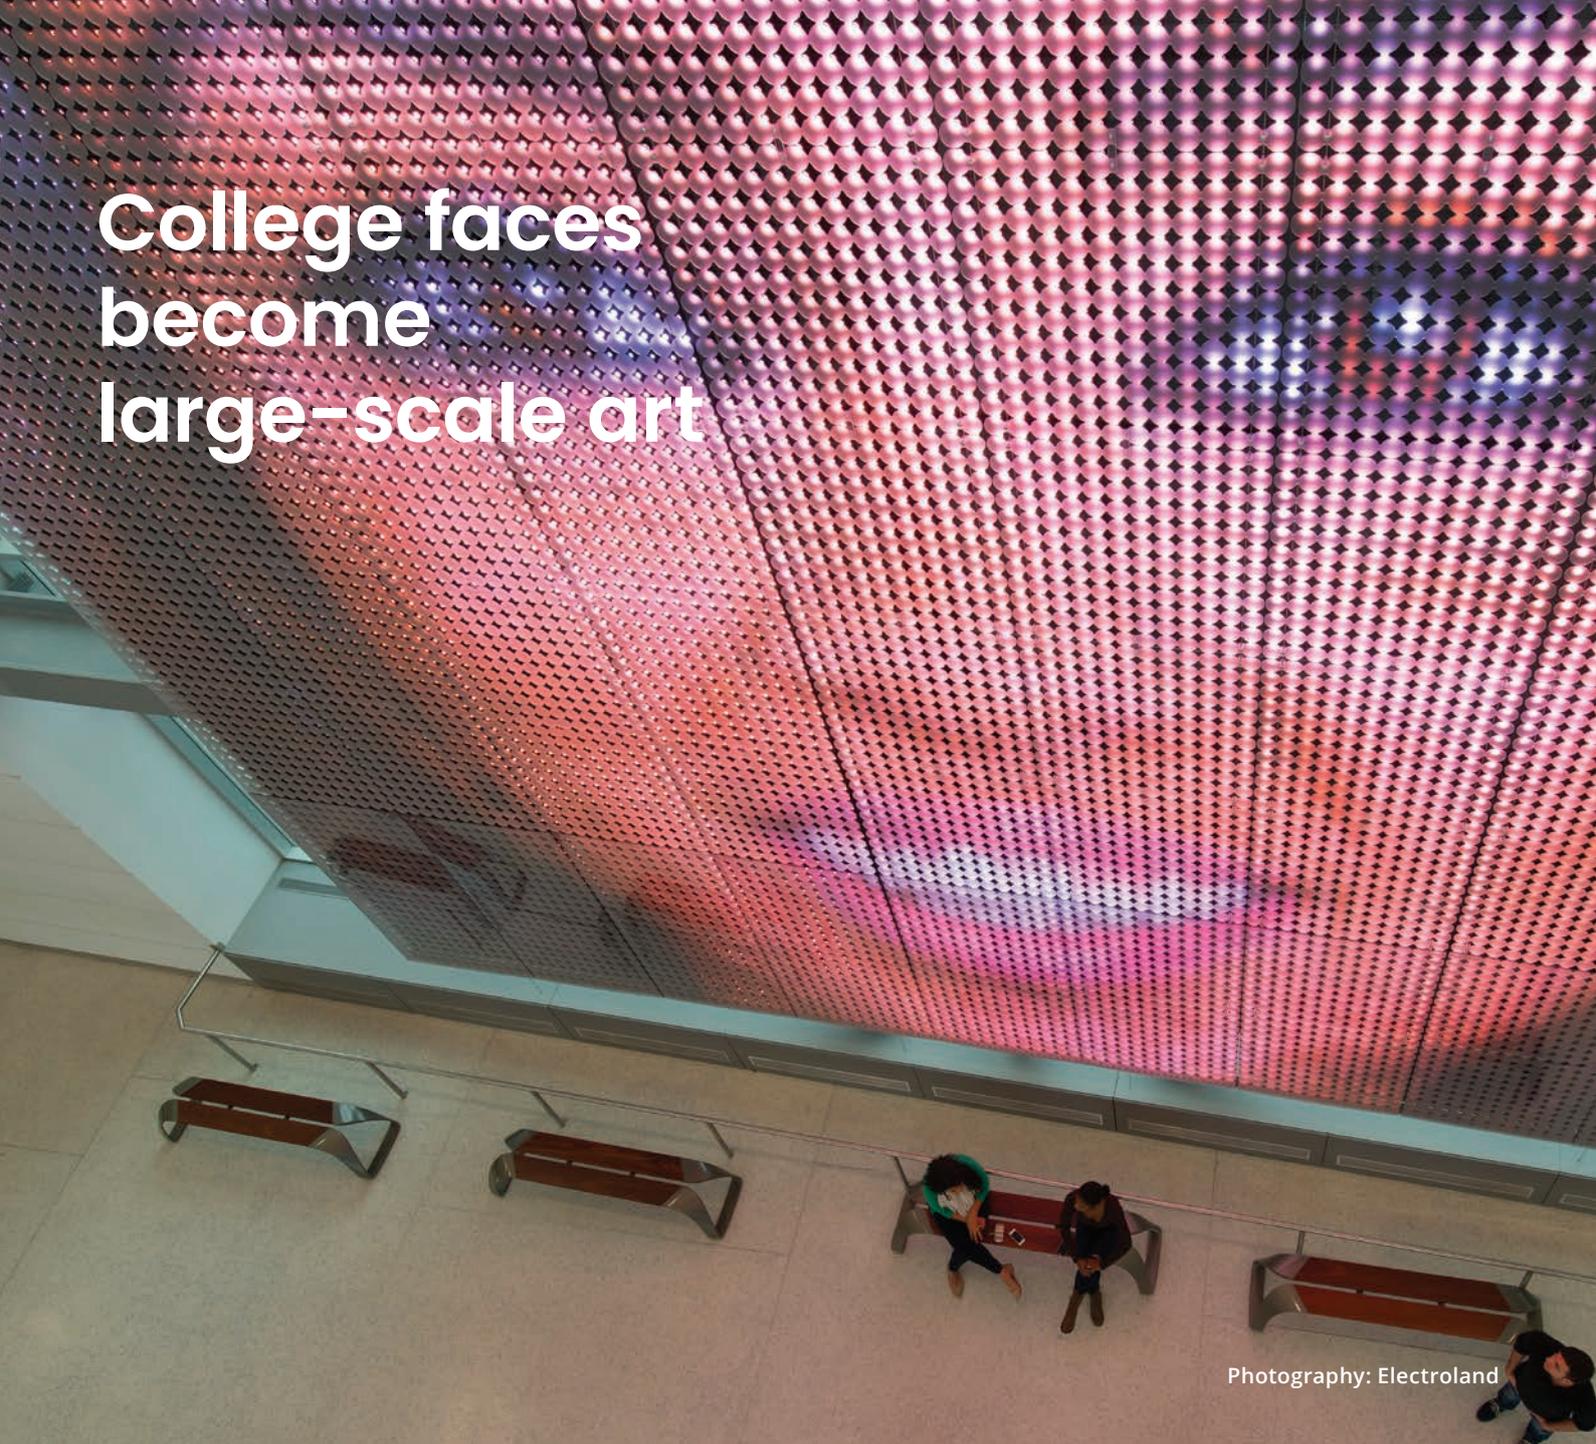

Photography: Electroland

When students pass through a central atrium at Gateway Community College, they see slowly shifting photos of their classmates, professors, and administrators on a 9 x 9 m (30 x 30 ft) LED wall.

Strands of iColor Flex LMX full-color LED nodes enable this innovative, eye-catching wall to display College Faces, a slow-motion collection of photos (including some from smartphones) that changes every thirty seconds.

| | |
|----------------|--|
| Product | iColor Flex LMX |
| Details | 9 m (30 ft) by 9 m (30 ft) screen with iColor Flex LMX spaced 4 inches on center |

Specifications and information

| Products | Lens options | Node spacing | Power consumption | Lumens per node | Efficacy lm/W | Nits per node | CRI |
|------------------------|---|---------------------------------|-------------------|-----------------|---------------|--|----------|
| Flex Compact gen3, RGB | Clear Flat Lens, Translucent Dome Lens | 102 mm (4 in) 305 mm (12 in) | 1 W | 11.5 to 33.3 | 10.8 to 31.2 | 17,229 cd/m ² 3,211 cd/m ² | - |
| Flex Compact, iW | | | 1 W | 28 to 80 | 29.2 to 79.4 | - | - |
| Flex Compact, eW | Clear Flat Lens, Semi-Frosted Flat Lens, Narrow Lens, Semi-Frosted Dome Lens, Translucent Dome Lens | | 1 W | 35 to 87 | 35 to 86.9 | Clear Flat Lens 2700 K -45,127 cd/m ² 4000 K -47,679 cd/m ² Narrow Beam Lens 2700 K -122,240 cd/m ² 4000 K -129,758 cd/m ² Translucent Dome Lens 2700 K -10,660 cd/m ² 4000 K -12,106 cd/m ² | 82 to 86 |

General information

| | | | |
|---|--|---|--|
| Viewing Angles | 105°, 165° (Flex Compact gen3, RGB) 36°, 105°, 165° (Flex Compact, iW) 36°, 105°, 200° (Flex Compact, eW) | | |
| LED Channels | RGB—Red/Green/Blue (Flex Compact gen3, RGB) iW—2700 K to 6500 K (Flex Compact, iW) eW—2700 K, 3000 K, or 4000 K (Flex Compact, eW) | | |
| Input Voltage | 24 VDC via sPDS-60ca 24V sPDS-480ca 24V PDS-60ca 24V CM-150 CA gen2 24V | | |
| Housing Material | Flex Compact - Polycarbonate Flex Compact Harsh Environment - Black polycarbonate with UV resistant thermoplastic overmold | | |
| Lens | UV-protected polycarbonate | | |
| Approbations | UL/cUL, FCC Class A, CE | | |
| Environment | Dry/Damp/Wet Location, IP66 | | |
| Weight - Flex Compact | 4 inch spacing 1.5 kg (3.3 lb) | 12 inch spacing 1.74 kg (3.8 lb) | |
| Weight - Flex Compact Harsh Environment | — | 12 inch spacing 2.36 kg (5.2 lb) | |
| Dimensions Flex Compact | Flat Lens 31 x 32 x 17 mm (1.2 x 1.3 x 0.7 in) | Narrow Lens 31 x 32 x 27 mm (1.2 x 1.3 x 1.06 in) | Dome Lens 31 x 32 x 28 mm (1.2 x 1.3 x 1.11 in) |
| Flex Compact Harsh Environment | Flat Lens 36 x 36 x 18.8 mm (1.42 x 1.42 x 0.74 in) | — | Dome Lens 36 x 36 x 30.2 mm (1.42 x 1.42 x 1.2 in) |

For further information

Complete details of every family, including part numbers, installation instructions, specification sheets, .ies files, and product drawings, can be found on the respective product pages.



Flex Compact gen3, RGB



Flex Compact, iW



Flex Compact, eW



**Flex Compact gen3
Harsh Environment, RGB**




**Flex Compact
Harsh Environment, iW**

Don't see what you want?


In addition to the standard Flex luminaires numerous custom configurations are available. These include a wide range of node counts and node spacing, lenses, and housing colors. Please contact your [Color Kinetics Lighting sales rep.](#) for more information.

Dimensions


Flex Compact Flat Lens

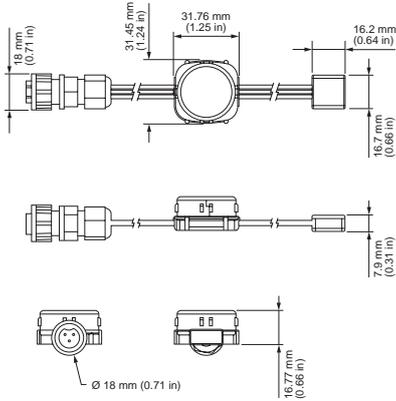


Flex Compact Narrow Lens

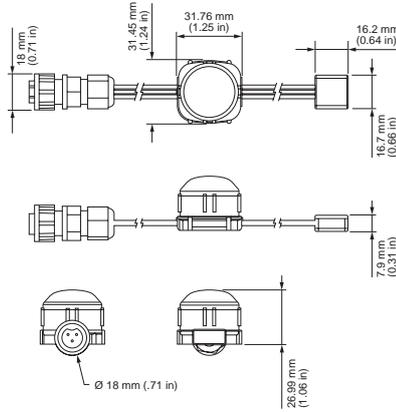


Flex Compact Dome Lens

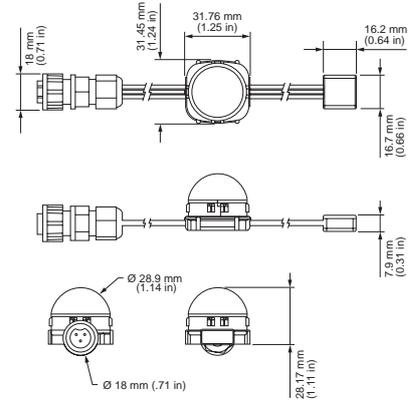


Flex Compact Glare Shield

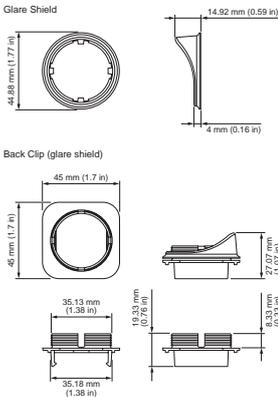


Flex Compact Mounting Accessories

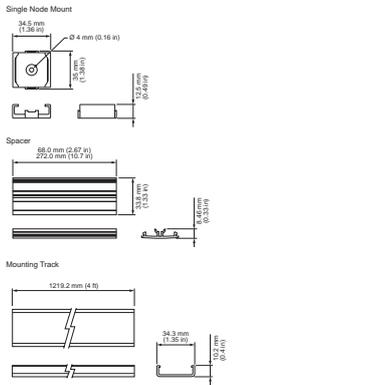


Flex Compact Marquee (flat lens only)

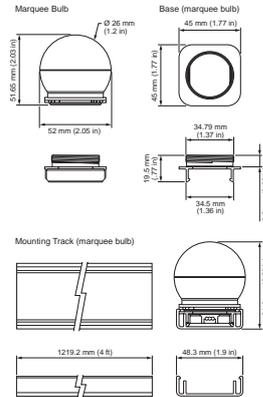


Flex Compact Harsh Environment Flat Lens

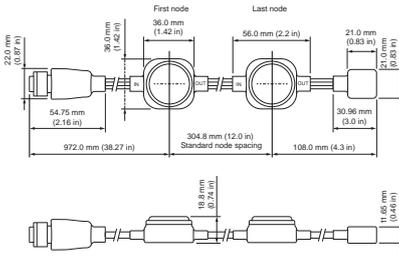

Flex Compact Harsh Environment Dome Lens

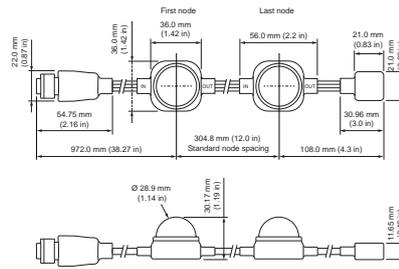

Flex Compact HE Mounting Track, Spacer and Individual Node Mount

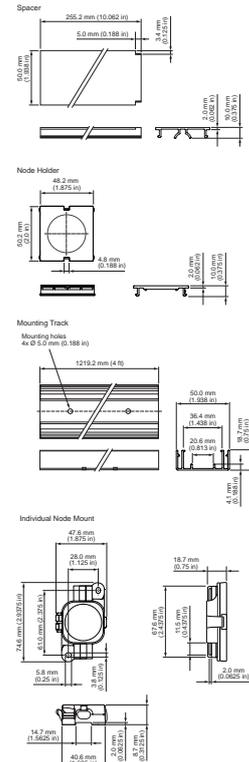

Accessories

| | Item Number | Item 12NC |
|---|---------------|--------------|
| Flex Compact Harsh Environment Mounting Track, 1.2 m (4 ft), Black | 101-000057-31 | 912400137666 |
| Flex Compact Harsh Environment Mounting Track, 1.2 m (4 ft), White | 101-000057-30 | 912400137665 |
| Flex Compact Harsh Environment Single-Node Mounts, 50 mounts, Black | 101-000058-31 | 912400137672 |
| Flex Compact Harsh Environment Single-Node Mounts, 50 mounts, White | 101-000058-30 | 912400137671 |
| Flex Compact Harsh Environment Spacers, 50 spacers,305 mm (12 in), Black | 101-000061-31 | 912400137670 |
| Flex Compact Harsh Environment Spacers, 50 spacers,305 mm (12 in), White | 101-000061-30 | 912400137669 |
| Flex Compact/iColor Flex LMX gen2 Single-Node Mounts, 50 mounts, Black | 101-000058-01 | 910503700047 |
| Flex Compact/iColor Flex LMX gen2 Single-Node Mounts, 50 mounts, White | 101-000058-00 | 910503700046 |
| Flex Glare Shield Kits, Qty 50, Black | 120-000179-00 | 912400130036 |
| Flex Spacers, Qty 50, 102 mm (4 in), Black | 101-000061-00 | 910503700052 |
| Flex Spacers, Qty 50, 102 mm (4 in), White | 101-000059-00 | 910503700048 |
| Flex Spacers, Qty 50, 305 mm (12 in), Black | 101-000061-01 | 910503700053 |
| Flex Spacers, Qty 50, 305 mm (12 in), White | 101-000059-01 | 910503700049 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Clear, Black | 999-007997-01 | 910503702309 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Clear, White | 999-007997-00 | 910503702308 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Semi-Frosted, Black | 999-007997-05 | 910503702313 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Semi-Frosted, White | 999-007997-04 | 910503702312 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Translucent, Black | 999-007997-03 | 910503702311 |
| iColor Flex LMX gen2, iW/eW Flex Compact Marquee Lens Kits, Qty 50, Translucent, White | 999-007997-02 | 910503702310 |
| iColor Flex LMX gen2, iW/eW Flex Compact Mounting Track, 1.2 m (4 ft), Black | 101-000057-01 | 910503700045 |
| iColor Flex LMX gen2, iW/eW Flex Compact Mounting Track, 1.2 m (4 ft), White | 101-000057-00 | 910503700044 |
| Marquee/Accessory Mounting Track, for use with iColor Flex LMX gen2 and iW/eW Flex Compact, 1.2 m (4 ft), Black | 101-000057-04 | 910503704267 |
| Marquee/Accessory Mounting Track, for use with iColor Flex LMX gen2 and iW/eW Flex Compact, 1.2 m (4 ft), White | 101-000057-03 | 910503704266 |
| Marquee/Accessory Spacers, for use with iColor Flex LMX gen2 and iW/eW Flex Compact, Qty 50, 305 mm (12 in), Black | 101-000075-03 | 910503704275 |
| Marquee/Accessory Spacers, for use with iColor Flex LMX gen2 and iW/eW Flex Compact, Qty 50, 305 mm (12 in), White | 101-000075-01 | 910503704273 |
| Marquee/Accessory Spacers, for use with iColor Flex LMX gen2, Qty 50, 102 mm (4 in), Black | 101-000075-02 | 910503704274 |
| Marquee/Accessory Spacers, for use with iColor Flex LMX gen2, Qty 50, 102 mm (4 in), White | 101-000075-00 | 910503704272 |
| 4 Conductor Leader Cable Part 1, Connecting all 24 VDC Flex Compact family or Flex Micro, eW, 278.8mm (10.9 in) to Part 2 Leader Cable | 108-000082-00 | 912400137819 |
| 4 Conductor Leader Cable Part 2, Connecting CM 150 CA gen2, 24V, IP00 (Item # 109-000041-00), 30.5m (100ft) to Part 1 Leader Cable | 108-000080-12 | 912400137820 |
| 4 Conductor Leader Cable Part 2, Connecting CM 150 CA gen2, 24V, IP66 (Item # 109-000041-02), 30.5m (100ft) to Part 1 Leader Cable | 108-000082-12 | 912400137821 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP00 (Item # 109-000041-00), 15.2m (50ft) | 108-000080-01 | 912400135907 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP00 (Item # 109-000041-00), 30.5m (100ft) | 108-000080-02 | 912400135908 |
| Leader Cable for iColor Flex MX/LMX, 15.2 m (50 ft), Black | 108-000045-01 | 910503700697 |
| Leader Cable for iColor Flex MX/LMX, 30.5 m (100 ft), Black | 108-000045-02 | 910503700698 |
| Leader Cable for iColor Flex MX/LMX, 7.6 m (25 ft), Black | 108-000045-00 | 910503700696 |
| Power Supplies | | |
| CM-150 CA gen2, DIN Rail Mount, Four-Wire Terminal, 4A 24V, IP00 | 109-000041-00 | 912400137430 |
| CM-150 CA gen2, Surface Mount, Four-Wire Terminal, 4A 24V, IP66 | 109-000041-02 | 912400137432 |
| PDS-60ca 24 V, DMX/Ethernet | 109-000016-04 | 912400133526 |
| PDS-60ca 24 V, Pre-Programmed | 109-000016-00 | 910503700095 |
| sPDS-480ca 24V | 109-000026-01 | 912400133528 |
| Power Supply, 320W 24V, 100-277V, IP67, RCM | 309-000014-07 | 912400133660 |
| Vaya Power Supply, 150W 24V, 100-277V, IP67, CCC | 309-000014-02 | 912400133655 |
| Vaya Power Supply, 150W 24V, 100-277V, IP67, RCM | 309-000014-06 | 912400133659 |
| Vaya Power Supply, 150W 24V, 100-277V, IP67, UL, CE, PSE | 309-000014-00 | 912400130538 |
| XITANIUM 100W 24V Power Supply, (120~277V) Individual Packaging | 309-000001-00 | 912400130191 |
| eW Flex SLX In-lin On/Off Power Adapter | 107-000008-00 | 910503700068 |

Specifications and information

| Products | Lens options | Node spacing | Power consumption | Lumens per node |
|----------------------|--|---------------------------------|--|-----------------|
| Flex Micro gen3, RGB | Clear Flat Lens Clear and Translucent Dome Lens | 102 mm (4 in) 305 mm (12 in) | 0.43 W per node, 22 W per 50 node string | 3.8 to 7.7 |
| Flex Micro, eW | Clear and Translucent Dome Lens | 102 mm (4 in) 305 mm (12 in) | 0.5 W | 18 to 28 |

General information

| | | |
|---|--|---|
| Viewing Angles | 105°, 165° | |
| LED Channels | RGB—Red/Green/Blue eW—2700 K, 3000 K, or 4000 K | |
| Input Voltage | 24 VDC via sPDS-480ca 24V (Flex Micro, eW) PDS-60ca 24V (Flex Micro, eW) CM-150 CA gen2 24V (Flex Micro, eW) 7.5 VDC via sPDS-480ca 7.5V (Flex Micro gen3, RGB) PDS-60ca 7.5V (Flex Micro gen3, RGB) CM-150 CA gen2 7.5V (Flex Micro gen3, RGB) | |
| Housing Material | Flex Micro - Polycarbonate Flex Micro Harsh Environment - Black polycarbonate with UV resistant thermoplastic overmold | |
| Lens | UV-protected polycarbonate | |
| Approbations | UL/cUL, FCC Class A, CE | |
| Environment | Dry/Damp/Wet Location, IP66 | |
| Flex Micro Weight Flex Micro Harsh Environment | 1.48 kg (3.3 lb) 1.7 kg (3.8 lb) | |
| Dimensions Flex Micro | Flat Lens 14 x 16 x 16 mm (0.5 x 0.63 x 0.63 in) | Dome Lens 19 x 16 x 16 mm (0.75 x 0.63 x 0.63 in) |
| Flex Micro Harsh Environment | Flat Lens 19.54 x 20.0 x 16.6 mm (0.77 x 0.79 x 0.65 in) | Dome Lens 19.54 x 20.0 x 21.6 mm (0.77 x 0.79 x 0.87 in) |

For further information

Complete details of every family, including part numbers, installation instructions, specification sheets, .ies files, and product drawings, can be found on the respective product pages.



Flex Micro gen3, RGB




Flex Micro, eW




Flex Micro gen3
Harsh Environment, RGB

Dimensions

Flex Micro Flat Lens

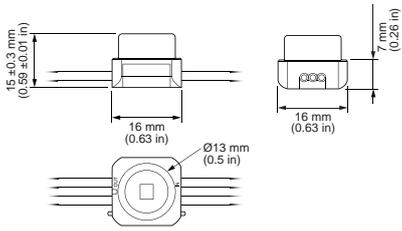


Flex Micro Dome Lens

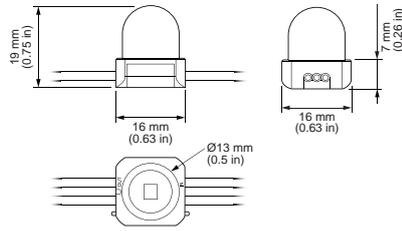


Flex Micro Mounting Accessories


Mounting Track Accessory

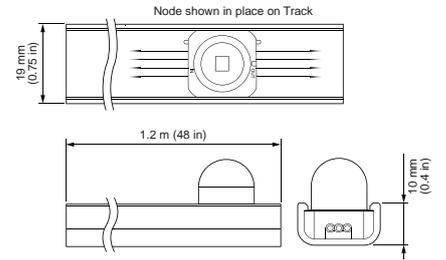


Single Node Accessory



Flex Micro Harsh Environment Flat Lens

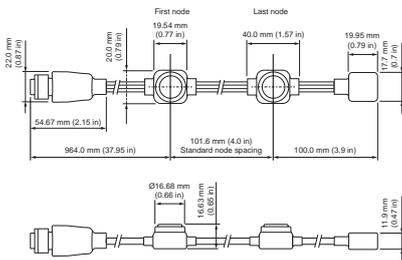


Flex Micro Harsh Environment Dome Lens

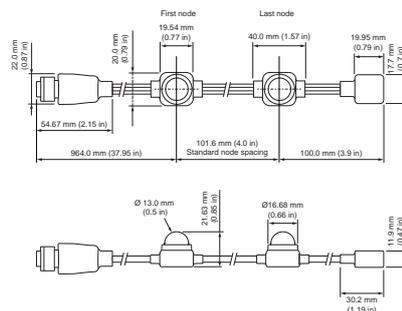


Flex Micro Harsh Environment Mounting Track and Spacer


Single Node Accessory



Spacer

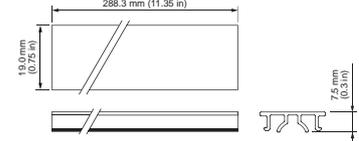

Mounting Track

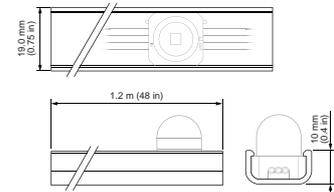

Accessories

| | Item Number | Item 12NC |
|---|---------------|--------------|
| 50 Flex Spacers, 102 mm (4 in), Black | 101-000047-01 | 910503700031 |
| 50 Flex Spacers, 102 mm (4 in), White | 101-000047-00 | 910503700030 |
| 50 Flex Spacers, 305 mm (12 in), Black | 101-000048-01 | 910503700033 |
| 50 Flex Spacers, 305 mm (12 in), White | 101-000048-00 | 910503700032 |
| eW Flex Micro/iColor Flex MX gen2 Single-Node Mounts, 50 mounts, Black | 101-000039-01 | 910503700026 |
| eW Flex Micro/iColor Flex MX gen2 Single-Node Mounts, 50 mounts, White | 101-000039-00 | 910503700025 |
| Flex Micro Harsh Environment Mounting Track, 1.2 m (4 ft), Black | 101-000024-31 | 912400137658 |
| Flex Micro Harsh Environment Mounting Track, 1.2 m (4 ft), White | 101-000024-30 | 912400137657 |
| Flex Micro Harsh Environment Spacers, 50 spacers, 102 mm (4 in), Black | 101-000047-31 | 912400137660 |
| Flex Micro Harsh Environment Spacers, 50 spacers, 102 mm (4 in), White | 101-000047-30 | 912400137659 |
| iColor Flex MX gen2 Mounting Track, 1.2 m (4 ft), Black | 101-000024-01 | 910503700016 |
| iColor Flex MX gen2 Mounting Track, 1.2 m (4 ft), White | 101-000024-00 | 910503700015 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP00 (Item # 109-000041-00), 15.2m (50ft) | 108-000080-01 | 912400135907 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP66 (Item # 109-000041-02), 30.5m (100ft) | 108-000082-02 | 912400135911 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP00 (Item # 109-000041-00), 30.5m (100ft) | 108-000080-02 | 912400135908 |
| 4 Conductor Leader Cable, Connecting all 24 VDC Flex Compact family or Flex Micro, eW to CM-150 CA gen2, IP66 (Item # 109-000041-02), 15.2m (50ft) | 108-000082-01 | 912400135910 |
| 4 Conductor Leader Cable Part 1, Connecting all 24 VDC Flex Compact family or Flex Micro, eW, 278.8mm (10.9 in) to Part 2 Leader Cable | 108-000082-00 | 912400137819 |
| 4 Conductor Leader Cable Part 2, Connecting CM 150 CA gen2, 24V, IP00 (Item # 109-000041-00), 30.5m (100ft) to Part 1 Leader Cable | 108-000080-12 | 912400137820 |
| 4 Conductor Leader Cable Part 2, Connecting CM 150 CA gen2, 24V, IP66 (Item # 109-000041-02), 30.5m (100ft) to Part 1 Leader Cable | 108-000082-12 | 912400137821 |
| Leader Cable for iColor Flex MX/LMX, 15.2 m (50 ft), Black | 108-000045-01 | 910503700697 |
| Leader Cable for iColor Flex MX/LMX, 7.6 m (25 ft), Black | 108-000045-00 | 910503700696 |
| Leader Cable for iColor Flex MX/LMX, 30.5 m (100 ft), Black | 108-000045-02 | 910503700698 |
| eW Flex SLX In-lin On/Off Power Adapter | 107-000008-00 | 910503700068 |
| Power Supplies | | |
| CM-150 CA gen2, DIN Rail Mount, Four-Wire Terminal, 4A 24V, IP00 | 109-000041-00 | 912400137430 |
| CM-150 CA gen2, Surface Mount, Four-Wire Terminal, 4A 24V, IP66 | 109-000041-02 | 912400137432 |
| CM-150 CA gen2, Surface Mount, Four-Wire Terminal, 5A 7.5V, IP66 | 109-000041-05 | 912400137982 |
| CM-150 CA gen2, DIN Rail Mount, Four-Wire Terminal, 5A 7.5V, IP00 | 109-000041-04 | 912400137981 |
| PDS-60ca 24 V, DMX/Ethernet | 109-000016-04 | 912400133526 |
| PDS-60ca 24 V, Pre-Programmed | 109-000016-00 | 910503700095 |
| PDS-60ca 7.5 V, DMX/Ethernet | 109-000015-03 | 910503700094 |
| PDS-60ca 7.5 V, Pre-Programmed | 109-000015-00 | 910503700093 |
| sPDS-480ca 24V | 109-000026-01 | 912400133528 |
| sPDS-480ca 7.5V | 109-000022-00 | 910503700107 |
| Vaya XITANIUM 100W 24V Power Supply, (120-277V) Individual Packaging | 309-000001-00 | 912400130191 |

Configuration and planning

Regardless of the size and complexity of your installation, the planning time you spend up front can help streamline the installation and configuration of your luminaires. Keep these points in mind as you plan your installation:

Which Power/Data Supplies are right for your luminaires?

Download the [Color Kinetics Product Guide](#).

Want to display video on your structure?

You may be a lighting designer who wants to tap the power of video, a municipality that wants to turn a landmark into an icon, or a building owner/manager who wants to draw attention to your office tower, stadium, casino, or other structure. Before you dive into video, there are some initial questions you need to ask yourself, key elements you'll need to create a complete solution, and some specific technical considerations that you need to address by reading [Color Kinetics Video Guidelines](#).

Additional considerations

Determine whether to address luminaires and configure your lighting system offline or interactively. With offline configuration, you stage and configure your system off-site, prior to installation. Offline configuration can be convenient when luminaires are to be installed in multiple locations or locations with difficult access. Interactive configuration is typically performed by an experienced technician, after luminaires have been installed. The interactive method can save time, since you only connect and test your luminaires once.

© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

All trademarks are owned by Signify Holding or their respective owners.

Cover photography credits: © Frank Tjepkema, Studio Tjep



www.colorkinetics.com