
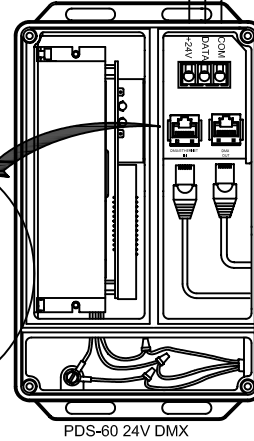




COLORBLAST 12 FIXTURE  
(MAXIMUM OF 1 PER PDS-60)

COLORBLAST 12 FIXTURE  
(MAXIMUM OF 1 PER PDS-60)

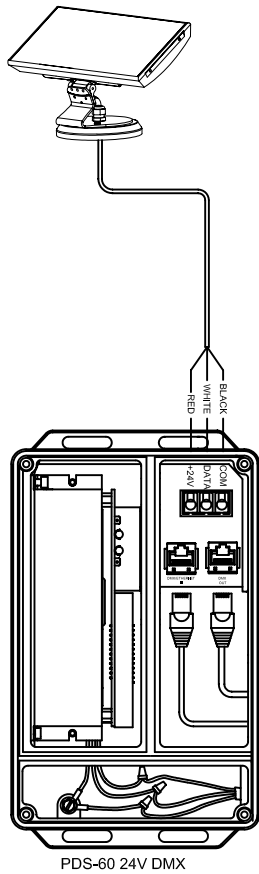


CONTINUE DMX OUT/IN SEQUENCE TO  
INCLUDE ALL PWR/DATA SUPPLIES, THEN  
TERMINATE THE LAST UNIT  
(SEE BELOW)



DMX OUT  
DMX IN  
100-240VAC

6' FLYING LEAD/RJ45  
DATA CABLE  
(OR SEE PIN-OUT BELOW IF  
MAKING CABLES)

5' FLYING LEAD/BNC  
POWER CABLE





COLORDIAL  
(BACK VIEW)



100-240V AC (1A)

**NOTE:**  
- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR  
WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT  
DMX-512 STANDARD FOR MORE INFORMATION.  
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 1

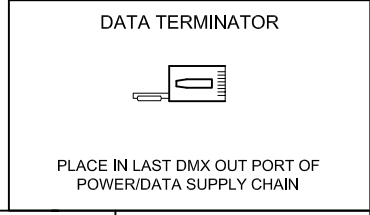

COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)  
"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:  
SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS:  
CB12 / PDS-60 24V / CD / PS-60

DATE:  
DWG. BY: S.D.  
SCALE: NTS  
REV:  
PAGE: 1 OF 1