

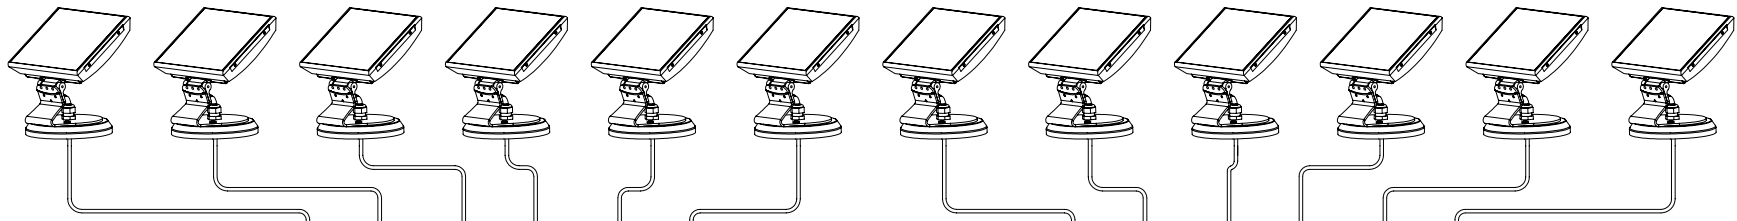


COLORBLAST 6 FIXTURES
(MAX. 6 PER PDS-150e)

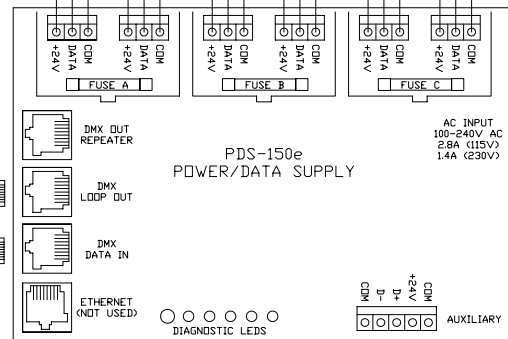

60' POWER/DATA CABLES
(INCLUDED W/ FIXTURES-
DO NOT EXTEND)

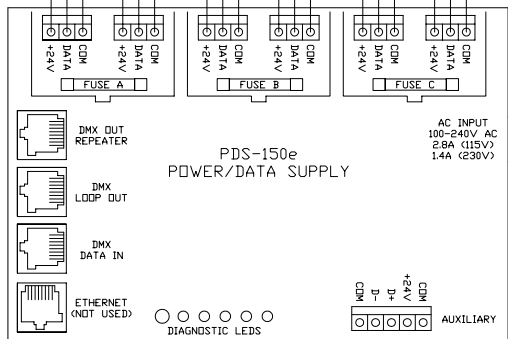


CONTINUE DMX OUT/IN
SEQUENCE TO INCLUDE ALL
PWR/DATA SUPPLIES, THEN
TERMINATE THE LAST UNIT
(SEE BELOW)


CAT 5/RJ45 DATA CABLE
(UTP 24 AWG 4 PAIR)

CAT 5/RJ45 DATA CABLE
(UTP 24 AWG 4 PAIR)

CAT 5/RJ45 DATA CABLE
(UTP 24 AWG 4 PAIR)

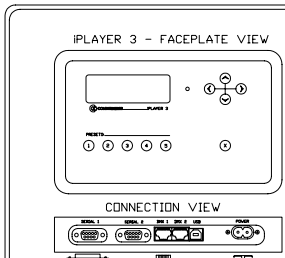

SERIAL CABLE
(20' INCL./50' MAX.)



CONTROLLER KEYPAD

NOTE:
- USE THE DMX OUT REPEATER PORT ON EVERY 32nd PDS UNIT IN THE DAISY CHAIN OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1000 FEET (300m). REFER TO THE "RECOMMENDED PRACTICES FOR DMX512" OR CONTACT TECHNICAL SUPPORT FOR FURTHER INFORMATION REGARDING INSTALLATIONS UTILIZING DMX512.
- iPLAYER 3 CAN SUPPORT TWO SEPARATE DMX UNIVERSES. USE "DMX 1" FOR SINGLE UNIVERSE APPLICATIONS. REFER TO iPLAYER 3 USER GUIDE FOR ADDITIONAL ON-BOARD FEATURES.




COPYRIGHT © 2007 PHILIPS SOLID-STATE LIGHTING SOLUTIONS. ALL RIGHTS RESERVED. CHROMACOLOR, CHROMALUX, OR THE SAUCE LOGO COLOR KINETICS, THE COLOR KINETICS LOGO, COLOR KINETICS THE LEADER IN INTELLIGENT LIGHT, COLORBLAST, COLORBLAZE, COLORBRIGHT, COLORCAST, COLORWAY, COLORSCAPE, DEMAND, DIRECT LIGHT, ESSENTIALWHITE, iV, iCOLOR, iCOLOR CODE, INTELLIGENT iV, iPLAYER, LIGHT BEHINDOUT LIMITS, iPLAYER, POWERCORE, QUICKPLAY, SAUCE, THE SAUCE LOGO, AND SMARTJUICE ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF THE IP LIGHTING SOLUTIONS IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

DATA TERMINATOR



CAT5/RJ45 PINOUT



TITLE: SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS: COLORBLAST 6/PDS-150e/iPLAYER 3/ CONTROLLER KEYPAD

DATE: 12-3-2007

DWG. BY: BHG

SCALE: NTS

REV: 1

PAGE: 1 OF 1