



COLORBLAST 6 FIXTURE
(MAXIMUM OF 2 PER PDS-60)

COLORBLAST 6 FIXTURE
(MAXIMUM OF 2 PER PDS-60)


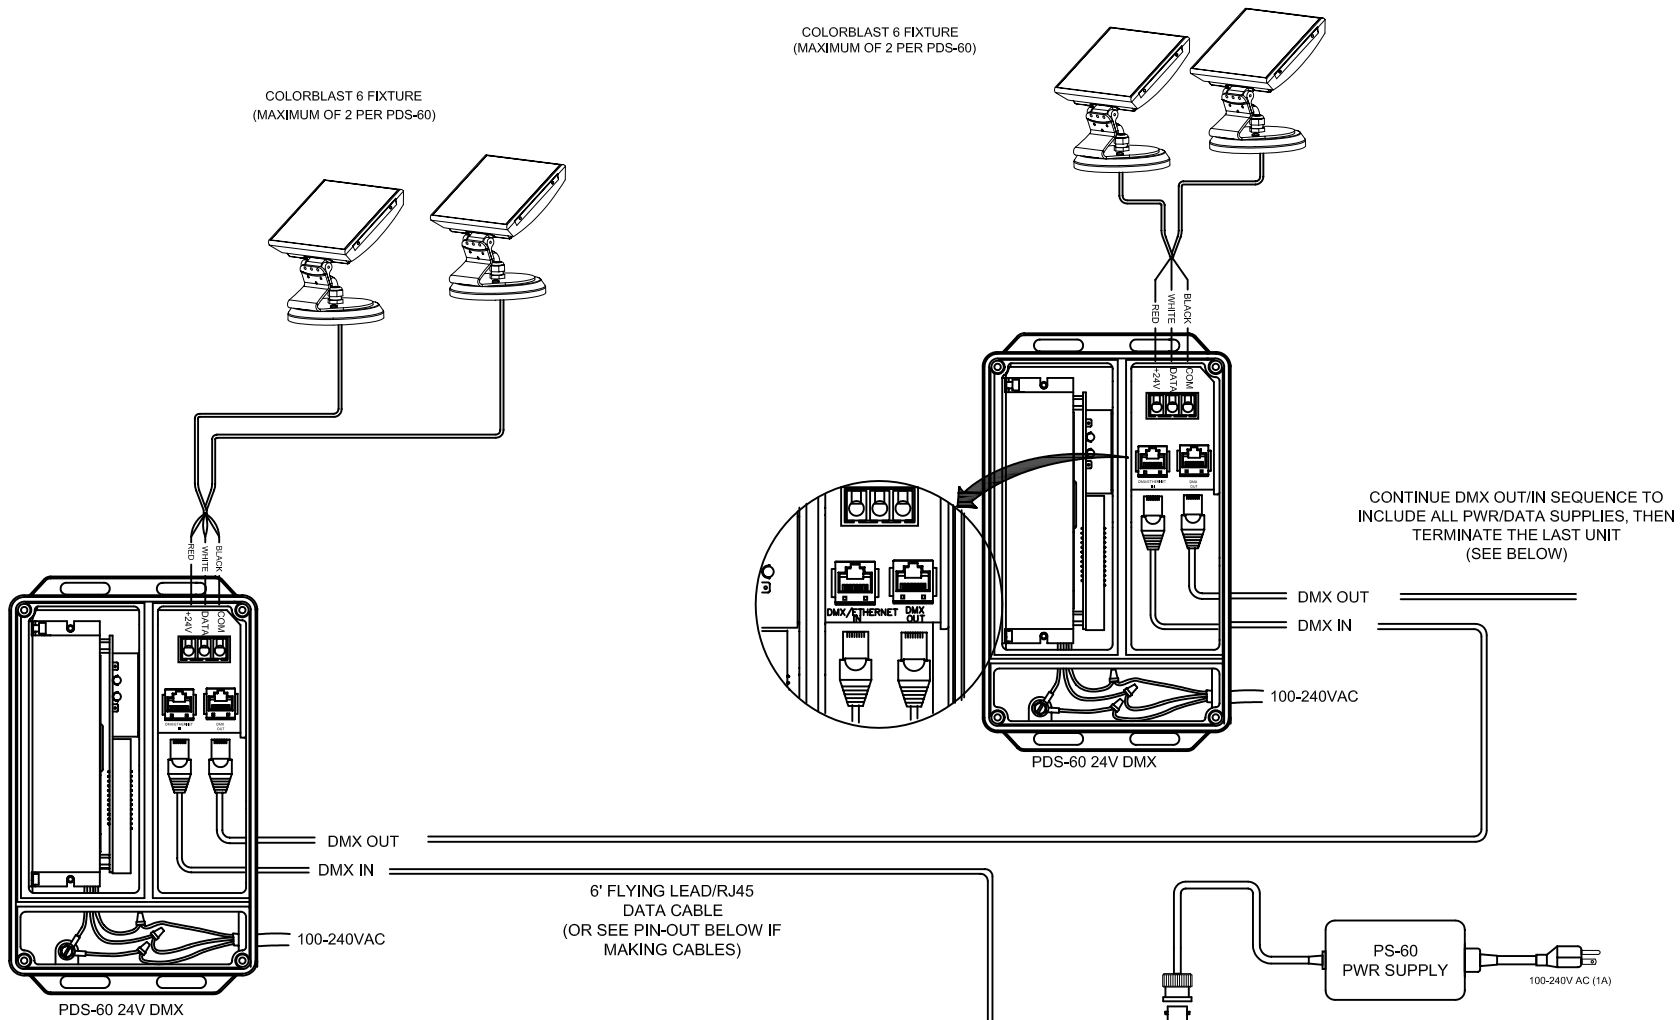


CONTINUE DMX OUT/IN SEQUENCE TO
INCLUDE ALL PWR/DATA SUPPLIES, THEN
TERMINATE THE LAST UNIT
(SEE BELOW)

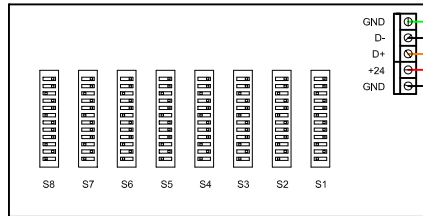

MULTISYNCHRONIZER
(BACK VIEW)

NOTE:
- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 2

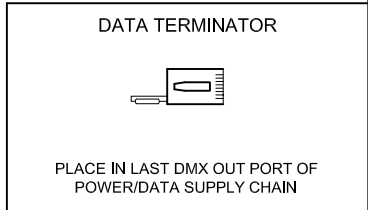

COLOR KINETICS INCORPORATED
10 MILK STREET, SUITE 1100
BOSTON, MA 02108
888 FULL RGB
617 423 9999
WWW.COLORKINETICS.COM
"FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	DATE:
PRODUCTS: CB6 / PDS-60 24V / MS / PS-60	DWG. BY: B.T.
	SCALE: NTS
	REV:
	PAGE: 1 OF 1