


**COLORBURST 6 FIXTURES
(MAX. 2 PER PDS-60)**

**COLORBURST 6 FIXTURES
(MAX. 2 PER PDS-60)**

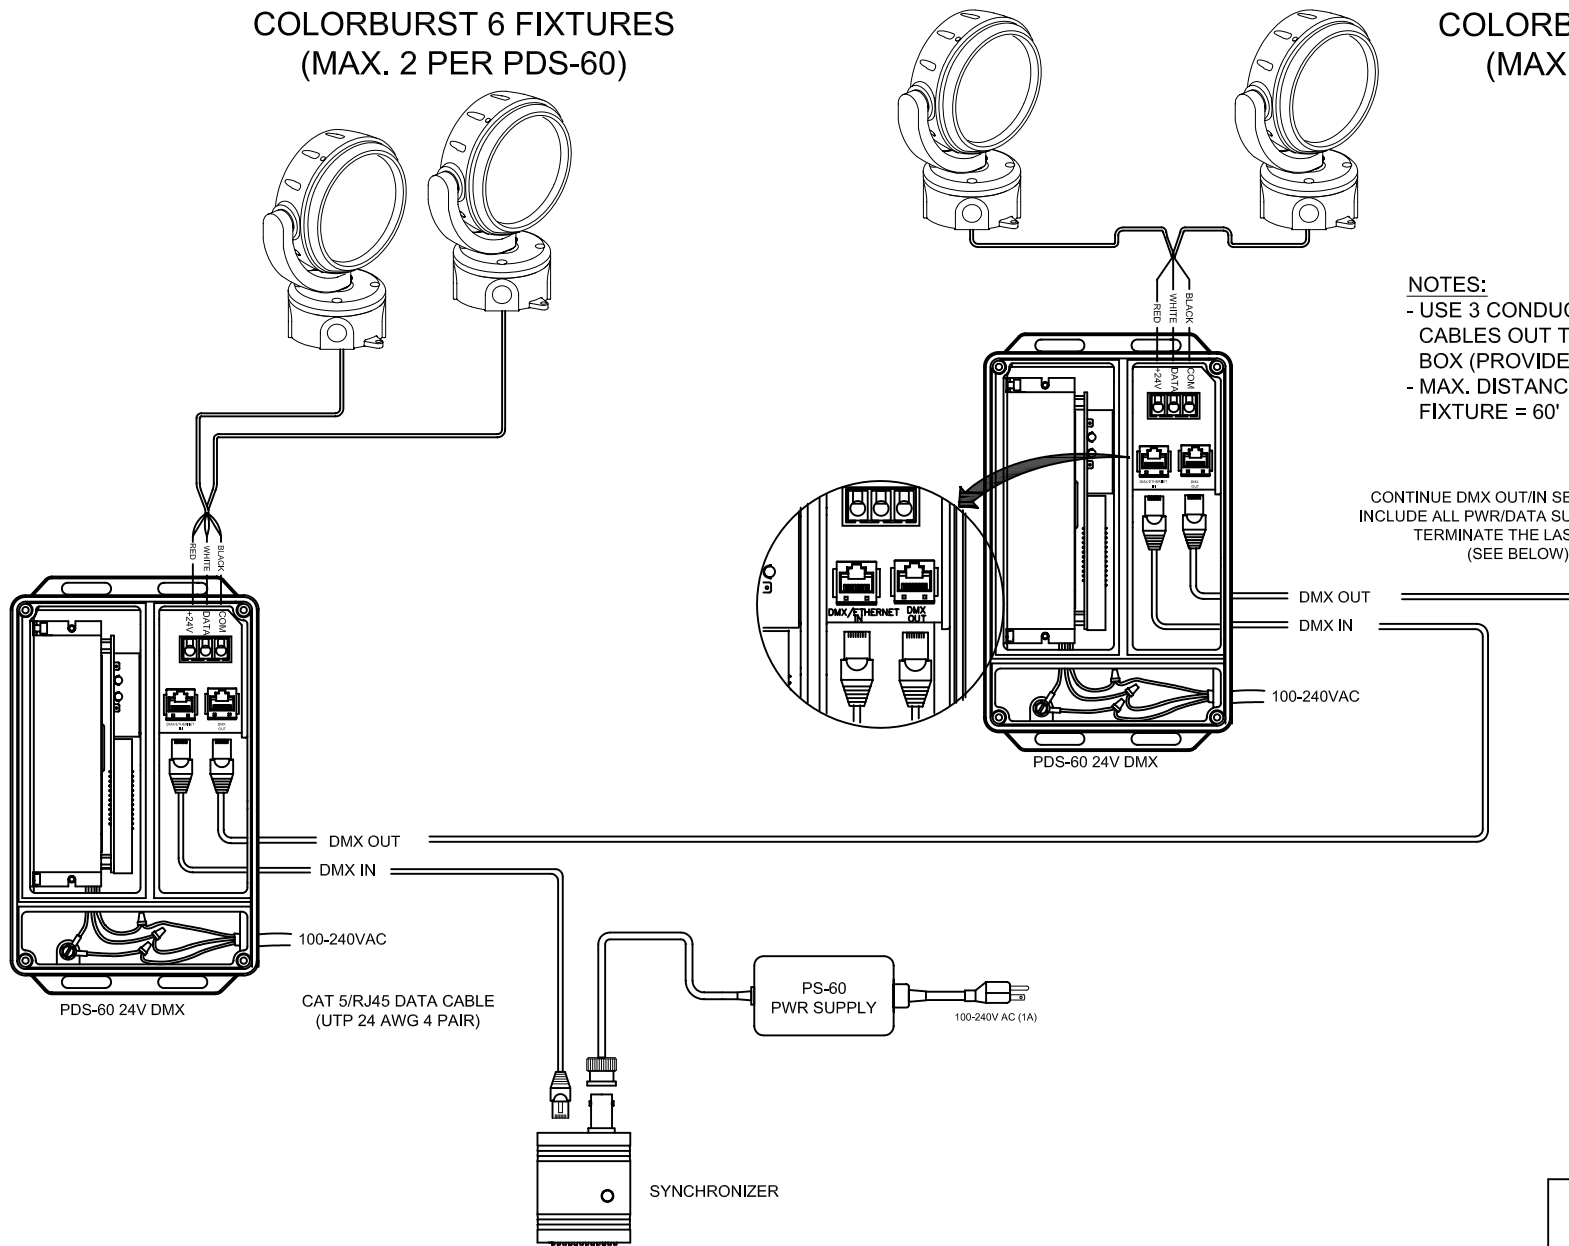


- NOTES:**
- USE 3 CONDUCTOR, 14-18AWG LEAD CABLES OUT TO EACH JUNCTION BOX (PROVIDED BY OTHERS).
 - MAX. DISTANCE FROM PDS-60 TO FIXTURE = 60'


CONTINUE DMX OUT/IN SEQUENCE TO INCLUDE ALL PWR/DATA SUPPLIES, THEN TERMINATE THE LAST UNIT (SEE BELOW)

- NOTE:**
- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60 24V: 2

DATA TERMINATOR



PLACE IN LAST DMX OUT PORT OF POWER/DATA SUPPLY CHAIN




COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL **RGB**
 617 423 9999
WWW.COLORKINETICS.COM
 "FULL SPECTRUM DIGITAL LIGHTING"

| | |
|--|--|
| TITLE: SYSTEM WIRING DIAGRAM (TYP) | |
| PRODUCTS: CBU6 / PDS-60 24V / SYNCHRONIZER / PS-60 | |

| | |
|-----------------|--------|
| DATE: | |
| DWG. BY: | B.T. |
| SCALE: | NTS |
| REV: | |
| PAGE: | 1 OF 1 |