


NOTE:
 - NEVER USE A DATA TERMINATOR WITH ETHERNET INPUT.
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60 24V: 2

COLORBURST 6 FIXTURES (MAX. 2 PER PDS-60)

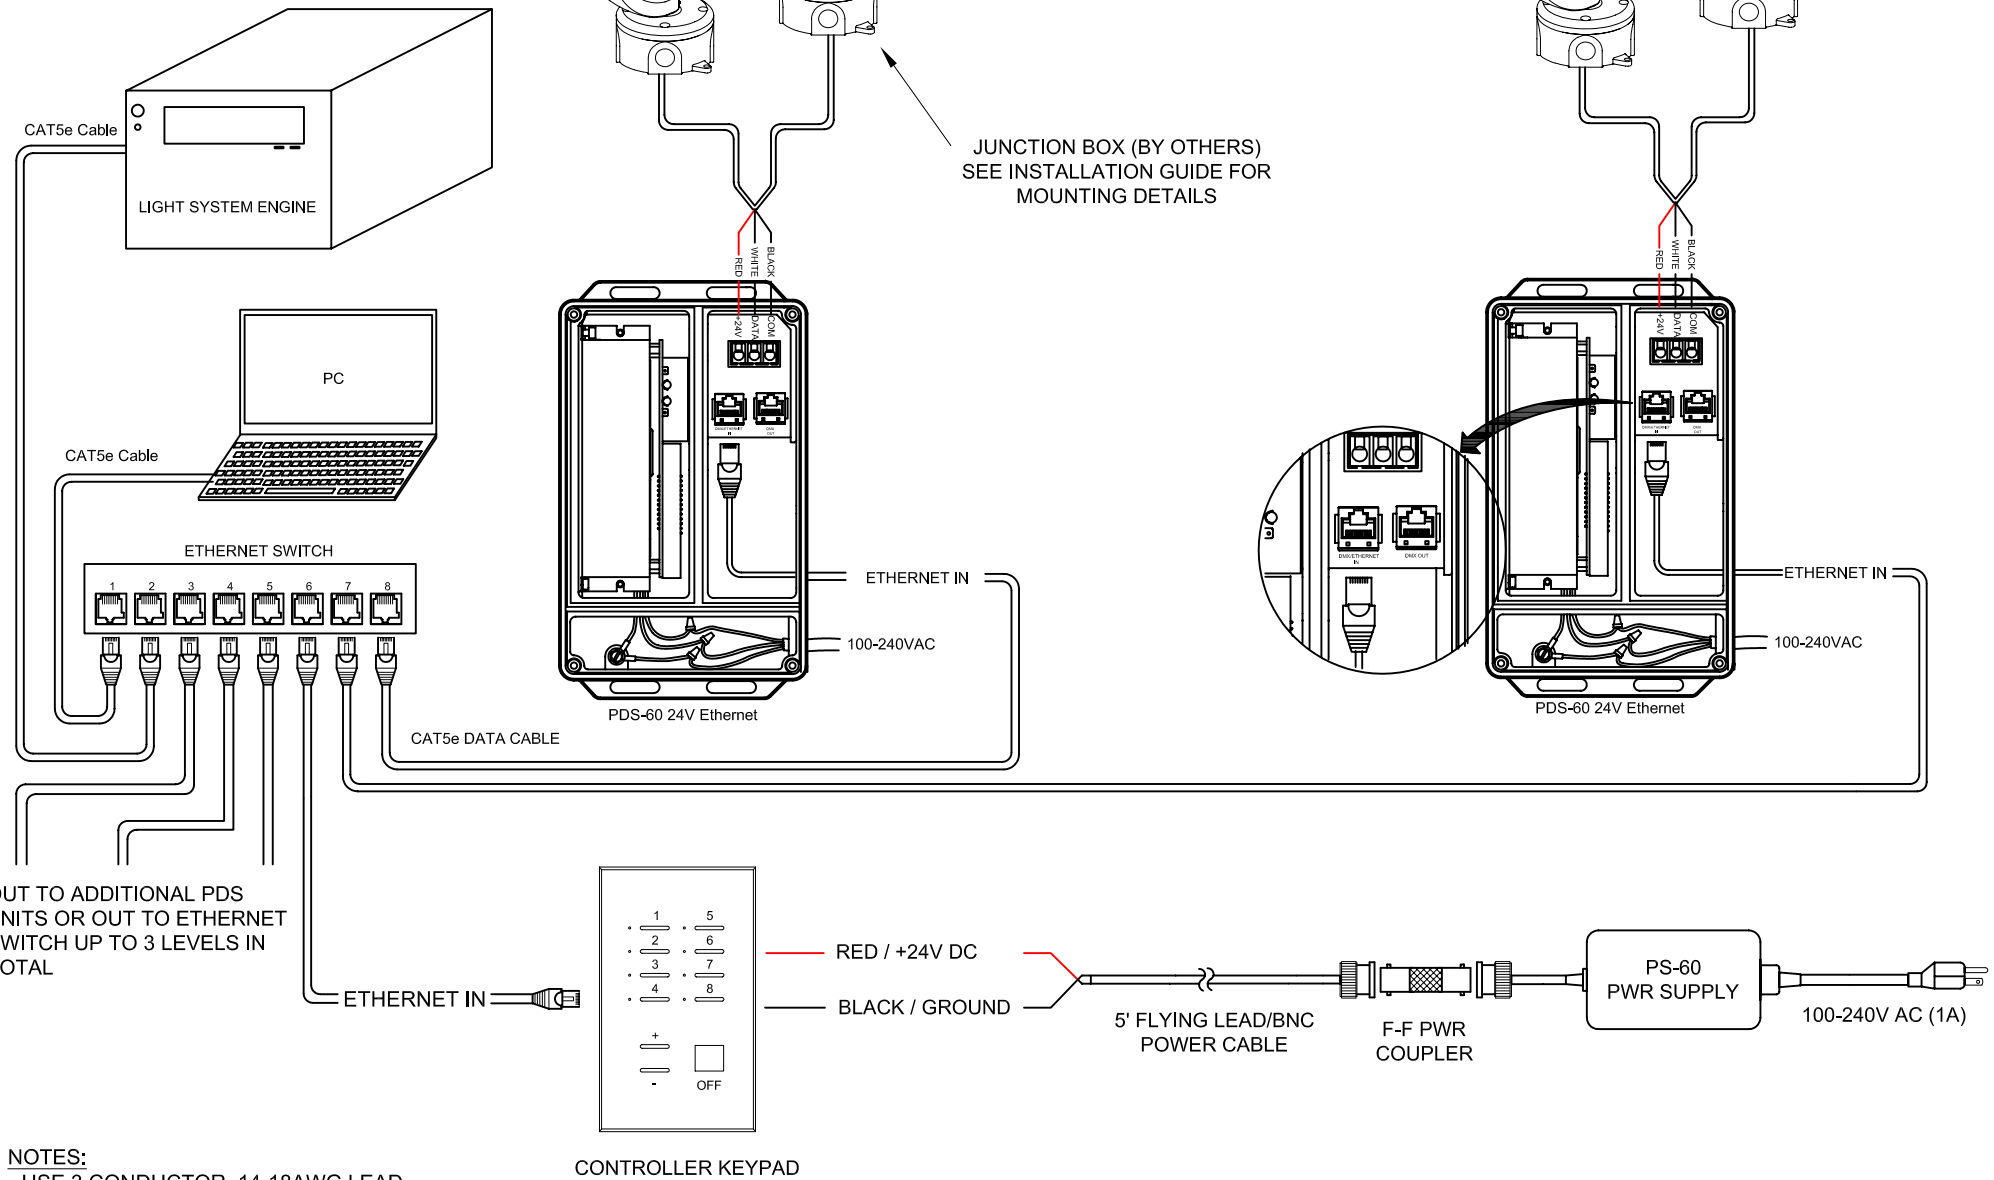

OUT TO ADDITIONAL PDS
 UNITS OR OUT TO ETHERNET
 SWITCH UP TO 3 LEVELS IN
 TOTAL

NOTES:
 - USE 3 CONDUCTOR, 14-18AWG LEAD
 CABLES OUT TO EACH JUNCTION
 BOX (PROVIDED BY OTHERS).
 - MAX. DISTANCE FROM PDS-60 TO
 FIXTURE = 60'



COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	CBU6 / PDS60 24V / LSM / ECK / PS-60

DATE:	
DWG. BY:	B.T.
SCALE:	NTS
REV:	
PAGE:	1 OF 1