


**COLORBURST 6 FIXTURES
(MAX. 2 PER PDS-60)**

**COLORBURST 6 FIXTURES
(MAX. 2 PER PDS-60)**

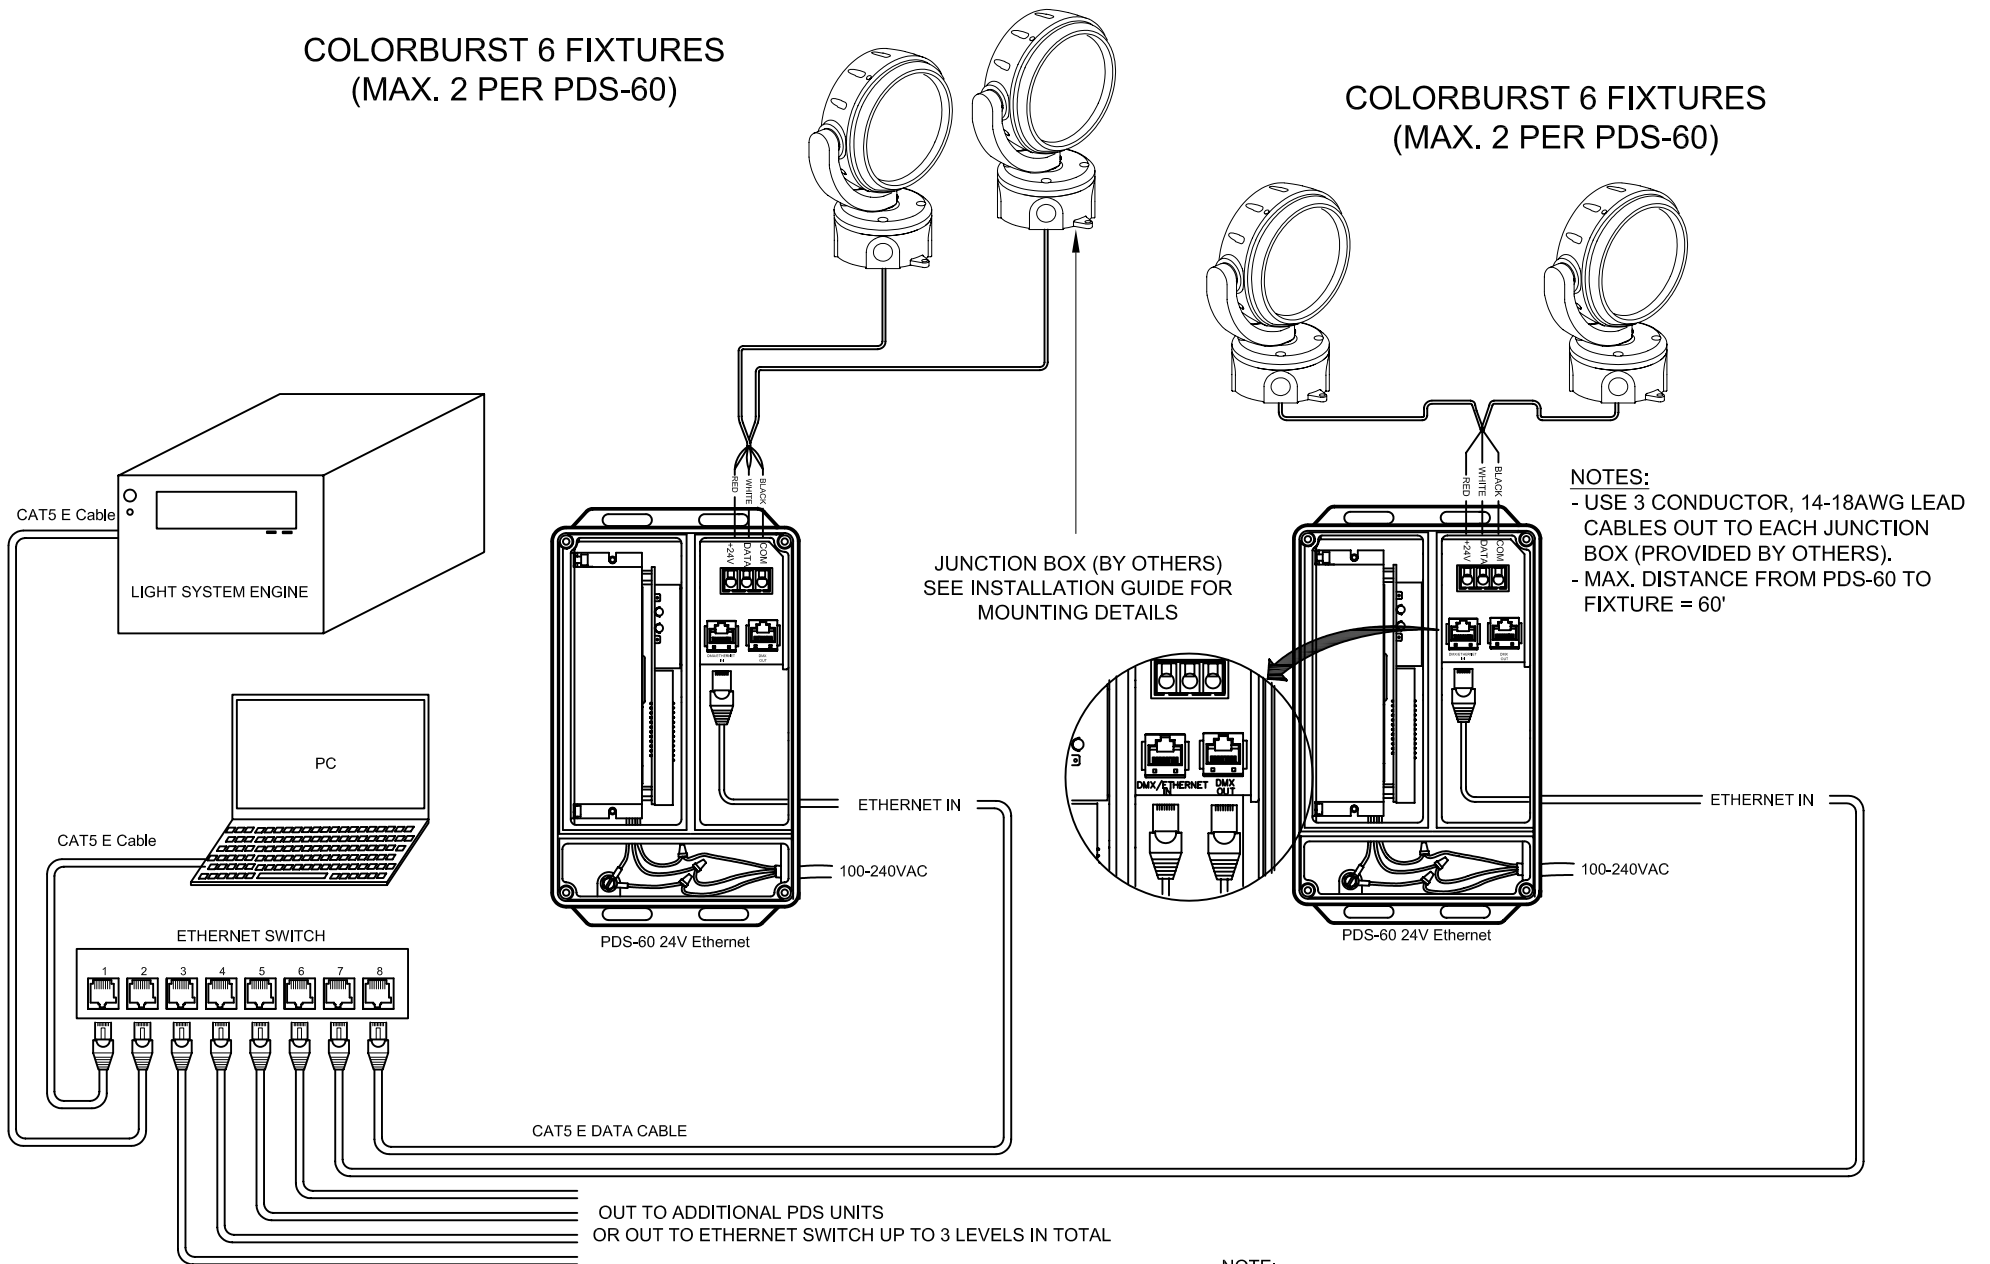

- NOTES:**
- USE 3 CONDUCTOR, 14-18AWG LEAD CABLES OUT TO EACH JUNCTION BOX (PROVIDED BY OTHERS).
 - MAX. DISTANCE FROM PDS-60 TO FIXTURE = 60'

JUNCTION BOX (BY OTHERS)
SEE INSTALLATION GUIDE FOR
MOUNTING DETAILS

- NOTE:**
- NEVER USE A DATA TERMINATOR WITH ETHERNET INPUT.
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60 24V: 2

OUT TO ADDITIONAL PDS UNITS
OR OUT TO ETHERNET SWITCH UP TO 3 LEVELS IN TOTAL



COLOR KINETICS INCORPORATED
10 MILK STREET, SUITE 1100
BOSTON, MA 02108
888 FULL RGB
617 423 9999
WWW.COLORKINETICS.COM
"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	CBU6 / PDS60 24V / LSM

DATE:	
DWG. BY:	B.T.
SCALE:	NTS
REV:	
PAGE:	1 OF 1