


MAXIMUM LIGHTS PER DATA ENABLER: 70 (DEPENDENT ON INSTALLATION PARAMETERS)

END-TO-END CONNECTION





MAXIMUM LIGHTS PER DATA ENABLER: 70 (DEPENDENT ON INSTALLATION PARAMETERS)

END-TO-END CONNECTION




50-FOOT LEADER CABLE

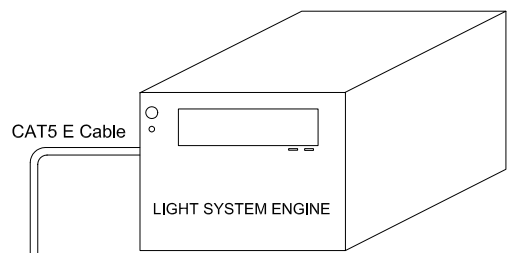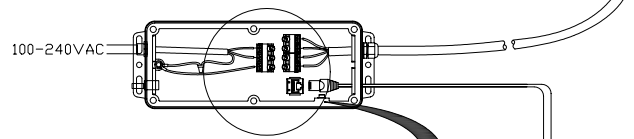


CAT5 E Cable

LIGHT SYSTEM ENGINE



CAT5 E Cable


PC





ETHERNET SWITCH

U.S.
 DATA - RED
 LINE - BLACK
 NEUTRAL - WHITE
 GROUND - GREEN/YELLOW

EUROPE
 DATA - RED
 LINE - BROWN
 NEUTRAL - BLUE
 GROUND - GREEN/YELLOW

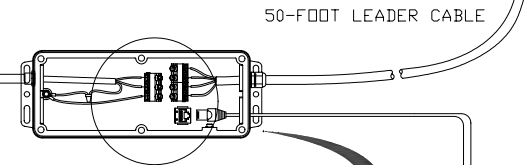

50-FOOT LEADER CABLE

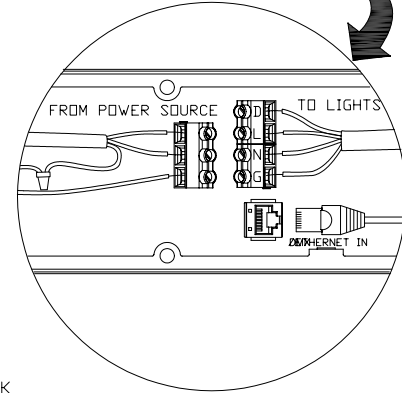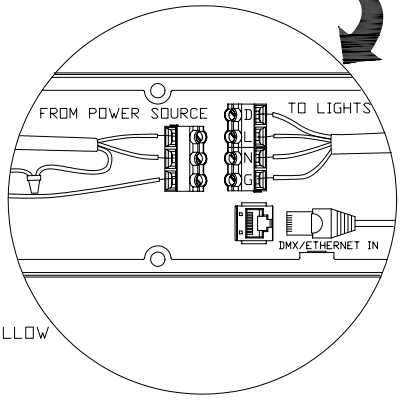

U.S.
 DATA - RED
 LINE - BLACK
 NEUTRAL - WHITE
 GROUND - GREEN/YELLOW

EUROPE
 DATA - RED
 LINE - BROWN
 NEUTRAL - BLUE
 GROUND - GREEN/YELLOW

CAT5 E DATA CABLE

OUT TO ADDITIONAL DATA ENABLER UNITS
 OR OUT TO ETHERNET SWITCH UP TO 3 LEVELS IN TOTAL



COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	COLORCAST 14 / DATA ENABLER / LSM

DATE:	
DWG. BY:	B.T.
SCALE:	NTS
REV:	
PAGE:	1 OF 1