



COLOR DIAL
(BACK VIEW)

14-18 AWG WIRES (2),
SUPPLIED BY E.C.
(MAX. DISTANCE = 50')

sMOPS-150

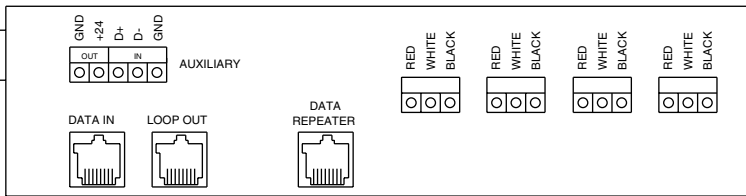

sMOPS-150

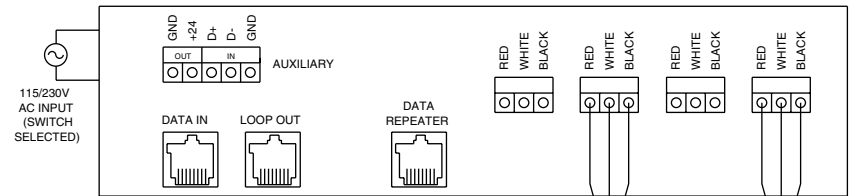

115/230V
AC INPUT
(SWITCH
SELECTED)

115/230V
AC INPUT
(SWITCH
SELECTED)

RJ45
8-PIN

CAT-5 DATA CABLE
(24 AWG, 4 PAIR)
(OR USE FLYING
LEAD/RJ45 DATA
CABLE)

CAT-5 DATA CABLE
(REPEAT LOOP TO FINAL cMOPS)



DATA
TERMINATOR

GREEN
GROUND TO
ENCLOSURE

GREEN
GROUND TO
ENCLOSURE

UNIFIED PWR/DATA CABLE
(MAX. 60' - INCLUDED)

C-SPLASH FIXTURE
(MAX. 4 PER sMOPS)



NOTES :

- sMOPS MAX. AC LINE DRAW = 3.2A (115V), OR 1.6A (230V).
- USE DATA REPEATER (OUT) AFTER 31ST sMOPS, OR WHEN DATA CABLE RUN EXCEEDS 100'. WHEN USING THE DATA REPEATER, PLACE A DATA TERMINATOR IN THE LOOP OUT PORT.



COLOR KINETICS INCORPORATED
10 MILK STREET, SUITE 1100
BOSTON, MA 02108
888 FULL RGB
617 423 9999
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

CLIENT:

TITLE:

COLOR DIAL-sMOPS-cSPLASH

DATE:

DWG. BY: TC

SCALE: NTS

REV:

PAGE: 1 OF 1