
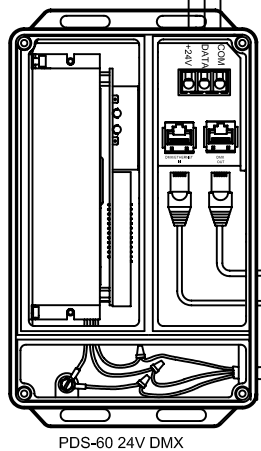
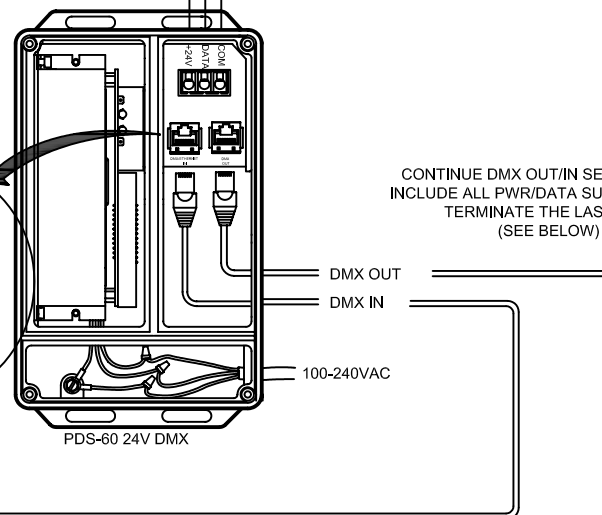
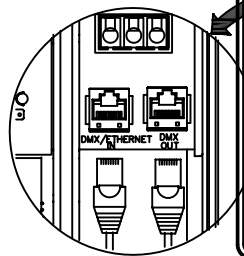


C-SPLASH 2 FIXTURE  
(MAXIMUM OF 2 PER PDS-60)


C-SPLASH 2 FIXTURE  
(MAXIMUM OF 2 PER PDS-60)

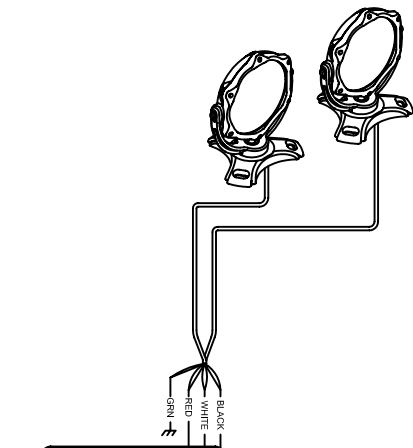

PDS-60 24V DMX



CAT 5/RJ45 DATA CABLE  
(UTP 24 AWG 4 PAIR)

SERIAL CABLE  
(20' INCL./50' MAX.)


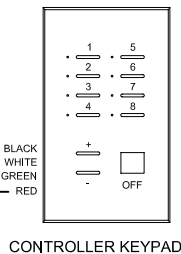


CONTROLLER KEYPAD

**LEGEND:**  
CHASSIS GROUND

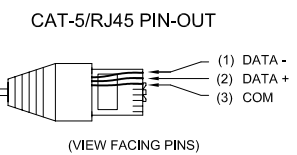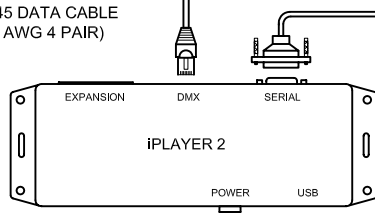

**NOTE:**  
- USE AN IN-LINE DMX REPEATER AFTER EVERY 16th PDS UNIT IN A CHAIN, OR WHEN A DATA CABLE RUN BETWEEN UNITS EXCEEDS 400 FEET.  
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 2

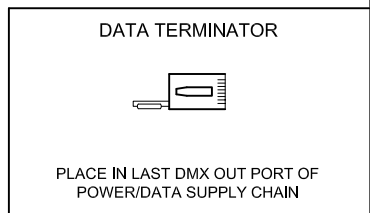

COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	
PRODUCTS: CS2 / PDS-60 24V / IP2 / P60 / KP	

DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1