


C-SPLASH 2 FIXTURE  
(MAXIMUM OF 2 PER PDS-60)

C-SPLASH 2 FIXTURE  
(MAXIMUM OF 2 PER PDS-60)

CONTINUE DMX OUT/IN SEQUENCE TO  
INCLUDE ALL PWR/DATA SUPPLIES, THEN  
TERMINATE THE LAST UNIT  
(SEE BELOW)



6' FLYING LEAD/RJ45  
DATA CABLE  
(OR SEE PIN-OUT BELOW IF  
MAKING CABLES)

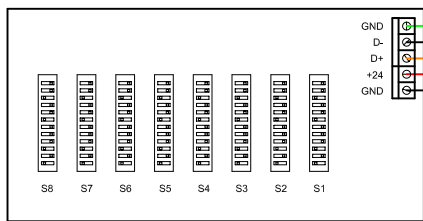

MULTISYNCHRONIZER  
(BACK VIEW)

NOTE:  
- USE AN IN-LINE DMX REPEATER AFTER EVERY 16th PDS UNIT IN A CHAIN,  
OR WHEN A DATA CABLE RUN BETWEEN UNITS EXCEEDS 400 FEET.  
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 2

LEGEND:  
CHASSIS GROUND

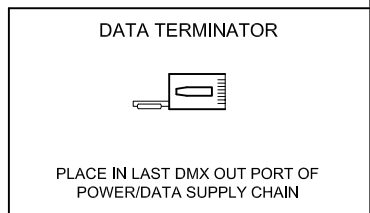

COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	
PRODUCTS: CS2 / PDS-60 24V / MS / P60	
DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1