


CAT-5 DATA CABLE  
(24 AWG, 4 PAIR)

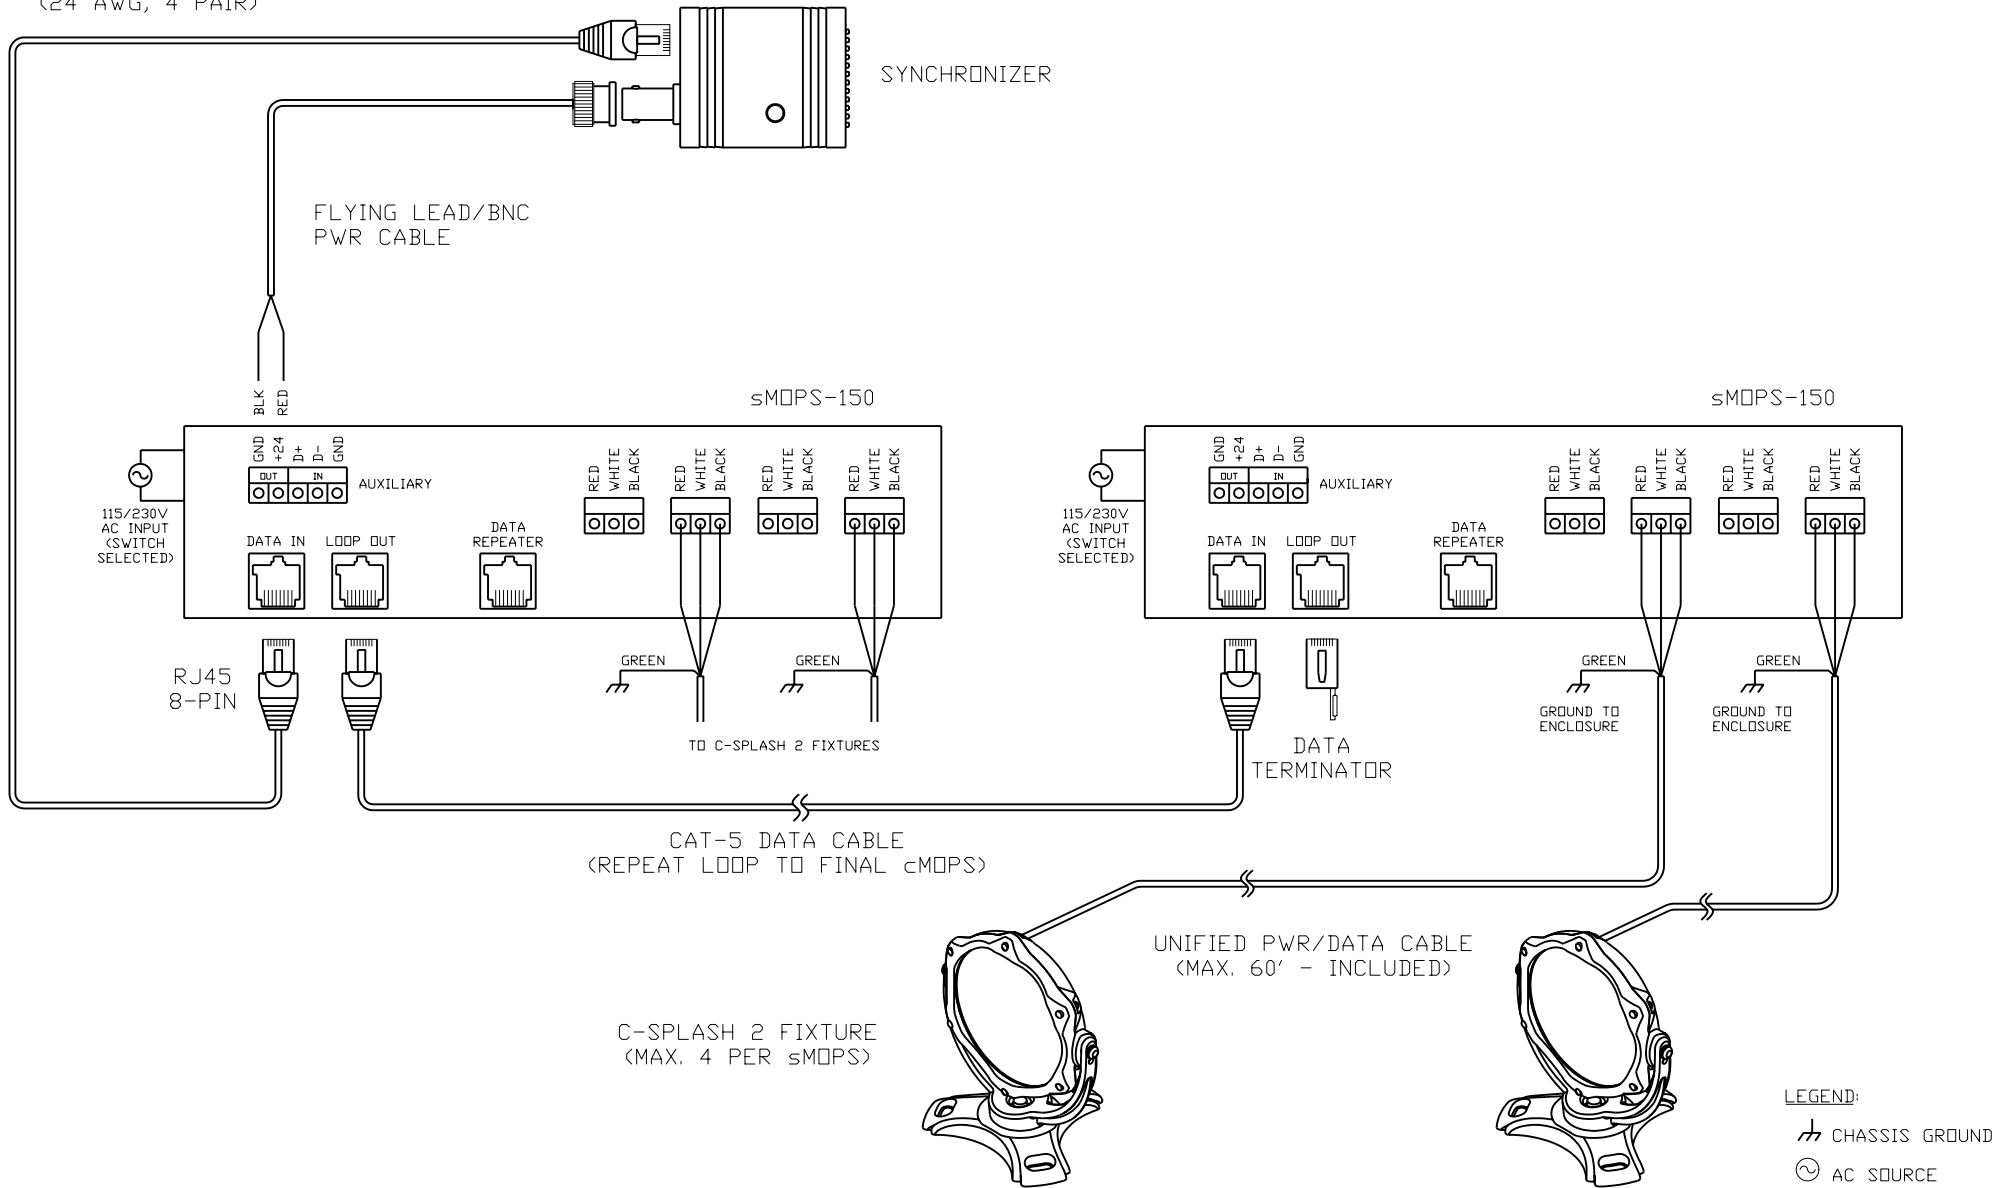


- NOTES:
- sMOPS MAX. AC LINE DRAW = 3.2A (115V), OR 1.6A (230V).
  - USE DATA REPEATER (OUT) ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN A DATA CABLE EXCEEDS 100'. WHEN USING THE DATA REPEATER, PLACE A DATA TERMINATOR IN THE LOOP OUT PORT.

LEGEND:


CHASSIS GROUND

AC SOURCE

DATA TERMINATOR



PLACE IN DMX LOOP OUT PORT OF POWER/DATA SUPPLY WHEN REQUIRED (SEE NOTES)



COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)

\*FULL SPECTRUM DIGITAL LIGHTING\*

CLIENT:	DATE:
TITLE:	DWG. BY: BS
CSPLASH 2-sMOPS-SYNCHRONIZER	SCALE: NTS
	REV:
	PAGE: 1 OF 1