MAXIMUM NUMBER OF FIXTURES PER PDS-96 24V: 38 X 12" FIXTURES OR 65 X 6" FIXTURES

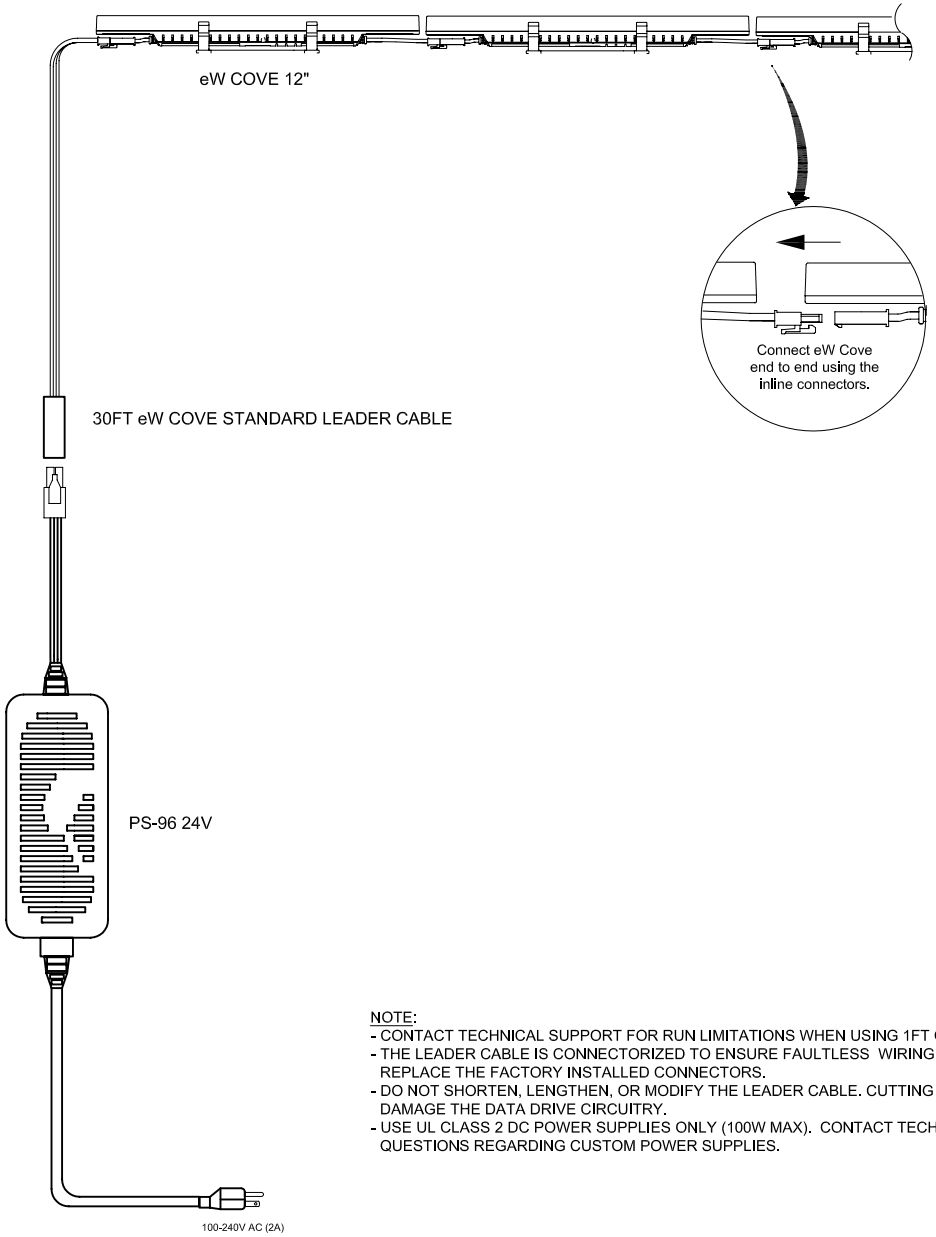

NOTE:
- CONTACT TECHNICAL SUPPORT FOR RUN LIMITATIONS WHEN USING 1FT OR 5FT JUMPER CABLES.
- THE LEADER CABLE IS CONNECTORIZED TO ENSURE FAULTLESS WIRING. DO NOT REMOVE OR REPLACE THE FACTORY INSTALLED CONNECTORS.
- DO NOT SHORTEN, LENGTHEN, OR MODIFY THE LEADER CABLE. CUTTING THE LEADER CABLE MAY DAMAGE THE DATA DRIVE CIRCUITRY.
- USE UL CLASS 2 DC POWER SUPPLIES ONLY (100W MAX). CONTACT TECHNICAL SUPPORT FOR QUESTIONS REGARDING CUSTOM POWER SUPPLIES.

COLOR KINETICS™

COPYRIGHT © 2007 COLOR KINETICS INCORPORATED. ALL RIGHTS RESERVED. CHROMACORE, CHROMASIC, CK, THE CK LOGO, COLOR KINETICS, THE COLOR KINETICS LOGO, COLOR KINETICS THE LEADER IN INTELLIGENT LIGHT, COLORBLAST, COLORBLAZE, COLORBURST, COLORCAST, COLORPLAY, EDGE, ECOLUX, ECOLUX LOGO, ECOLUX WITH COLOR KINETICS, ECOLUX COVE, ECOLUX WITH EDGE, ILLUMINATED LIGHT STRUCTURES, OPEN WHITE, POWERCORE, QUADPLAY, SAUCE, THE SAUCE LOGO, AND SMARTJUICE ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF COLOR KINETICS INCORPORATED IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

DATA TERMINATOR

PLACE IN DMX LOOP OUT PORT OF POWER/DATA SUPPLY WHEN REQUIRED (SEE NOTES)

CAT5/RJ45 PINOUT



(VIEW FACING PINS)

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	eW COVE/PS-96 24V/eW COVE STANDARD LEADER CABLE
DATE:	4-10-2007
DWG. BY:	BHG
SCALE:	NTS
REV:	BHG: 8-2-2007
PAGE:	1 OF 1

COLOR KINETICS INCORPORATED 10 MILK STREET SUITE 1100 BOSTON, MA 02108 TEL 1.888.FULL.RGB TEL 1.617.423.9999 FAX 1.617.423.9998 WWW.COLORKINETICS.COM