


OUT TO ADDITIONAL
PDS UNITS OR OUT TO
ETHERNET SWITCH UP
TO 3 LEVELS IN TOTAL

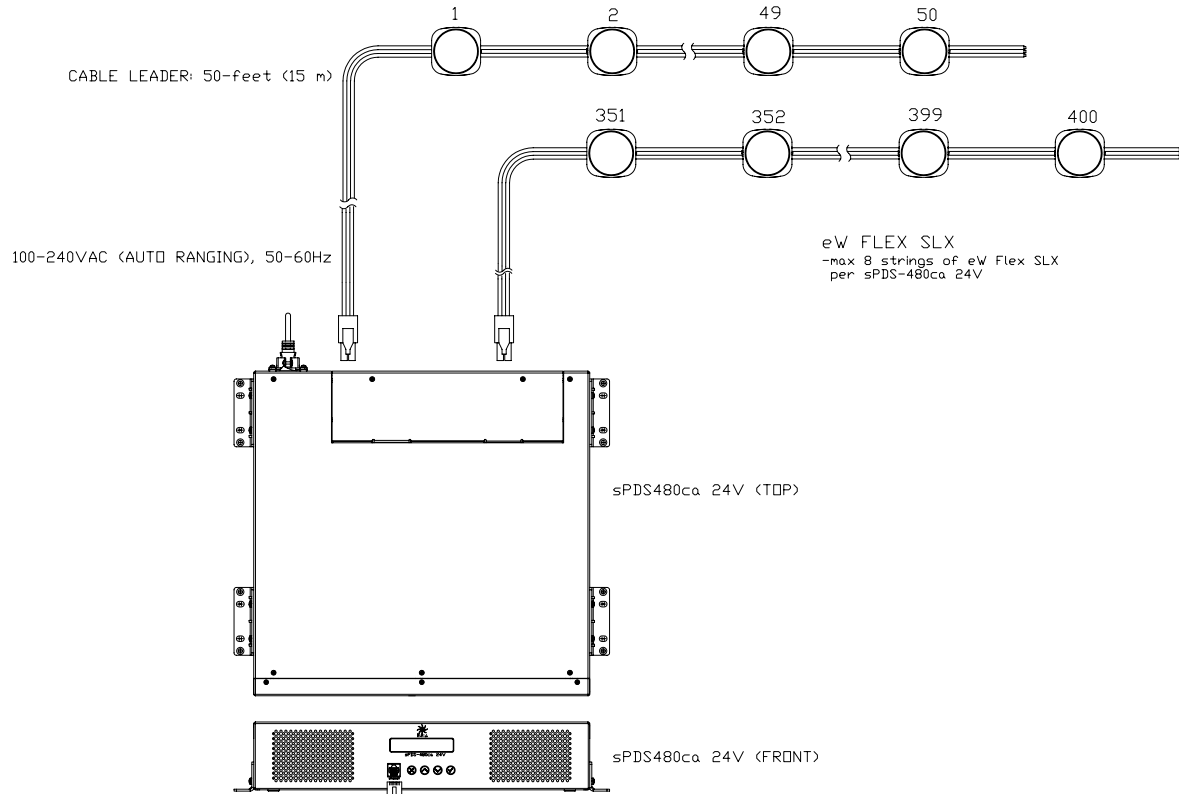

ADDRESSING AND CONTROL:

- LIGHTS ARE AUTOMATICALLY DISCOVERED AND ADDRESSED USING LIGHT SYSTEM COMPOSER SOFTWARE PACKAGE. REFER TO USER GUIDE FOR FURTHER INSTRUCTIONS ON ADDRESSING AND CONTROL
- WHEN CREATING SHOWS WITH LIGHT SYSTEM COMPOSER SOFTWARE USE RGB EFFECTS WITH EITHER WHITE (ON) OR BLACK (OFF). CONTACT TECHNICAL SUPPORT FOR FUTURE ASSISTANCE WITH PROGRAMMING.

NOTE:

- MAXIMUM CAT5 RUN BETWEEN DEVICES IS 330 FEET (100m). CONTACT COLOR KINETICS TECHNICAL SUPPORT FOR INSTALLATIONS REQUIRING CUSTOM NETWORK CONFIGURATIONS.
- THE LEADER CABLE IS CONNECTORIZED TO ENSURE FAULTLESS WIRING. DO NOT REMOVE OR REPLACE THE FACTORY INSTALLED CONNECTORS.
- DO NOT SHORTEN, LENGTHEN, OR MODIFY THE LEADER CABLE. CUTTING THE LEADER CABLE MAY DAMAGE THE DATA DRIVE CIRCUITRY.

PHILIPS

COPYRIGHT © 2007 PHILIPS SOLID-STATE LIGHTING SOLUTIONS. ALL RIGHTS RESERVED. CHROMACORE, CHROMASCIC, CK, THE CK LOGO, COLOR KINETICS, THE COLOR KINETICS LOGO, COLOR KINETICS THE LEADER IN INTELLIGENT LIGHT, COLORBLAST, COLORBLAZE, COLORBURST, COLORCAST, COLORPLAY, COLORSCALE, ORBAND, ORBIT LIGHT, ESSENTIALWHITE, EW, FLEX, KOLOR, KOLOR COVE, INTELLIWHITE, iV, iPLAYER, LIGHT WITHOUT LIMITS, OPTIBIN, POWERCORE, QUICKPLAY, SAUCE, THE SAUCE LOGO, AND SMARTJUICE ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF PHILIPS SOLID-STATE LIGHTING SOLUTIONS IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

DATA TERMINATOR
NOTE REQUIRED WITH
ETHERNET SYSTEMS

DATA CALBES (UTP)

ACCEPTABLE CABLE TYPES:
CAT-5/CAT-5e/CAT-6
STRAIGHT-THROUGH (T568B)

TITLE:	SYSTEM WIRING DIAGRAM (TYP)	DATE:	8-1-2008
PRODUCTS:	eW FLEX SLX/sPDS-480ca 24V/LIGHT SYSTEM MANAGER	DWG. BY:	BHG
		SCALE:	NTS
		REV:	
		PAGE:	1 OF 1