



NOTE:  
 - NEVER USE A DATA TERMINATOR WITH ETHERNET INPUT.  
 - DO NOT SHORTEN OR LENGTHEN LEADER CABLE.  
 CUTTING THE LEADER CABLE WILL DAMAGE THE  
 FIXTURES AND/OR POWER DATA SUPPLY.

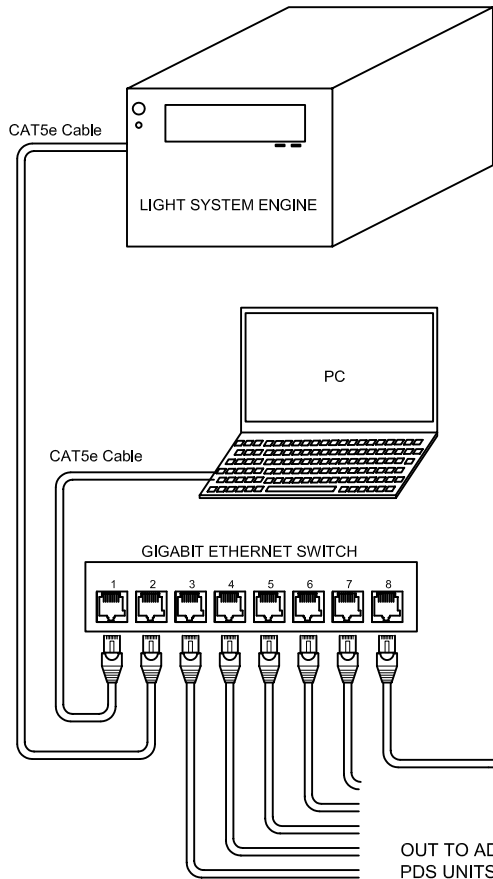

OUT TO ADDITIONAL  
 PDS UNITS OR OUT TO  
 ETHERNET SWITCH UP  
 TO 3 LEVELS IN TOTAL

100-240VAC (AUTO RANGING), 50-60Hz

CABLE LEADER: 20-feet (9 m)

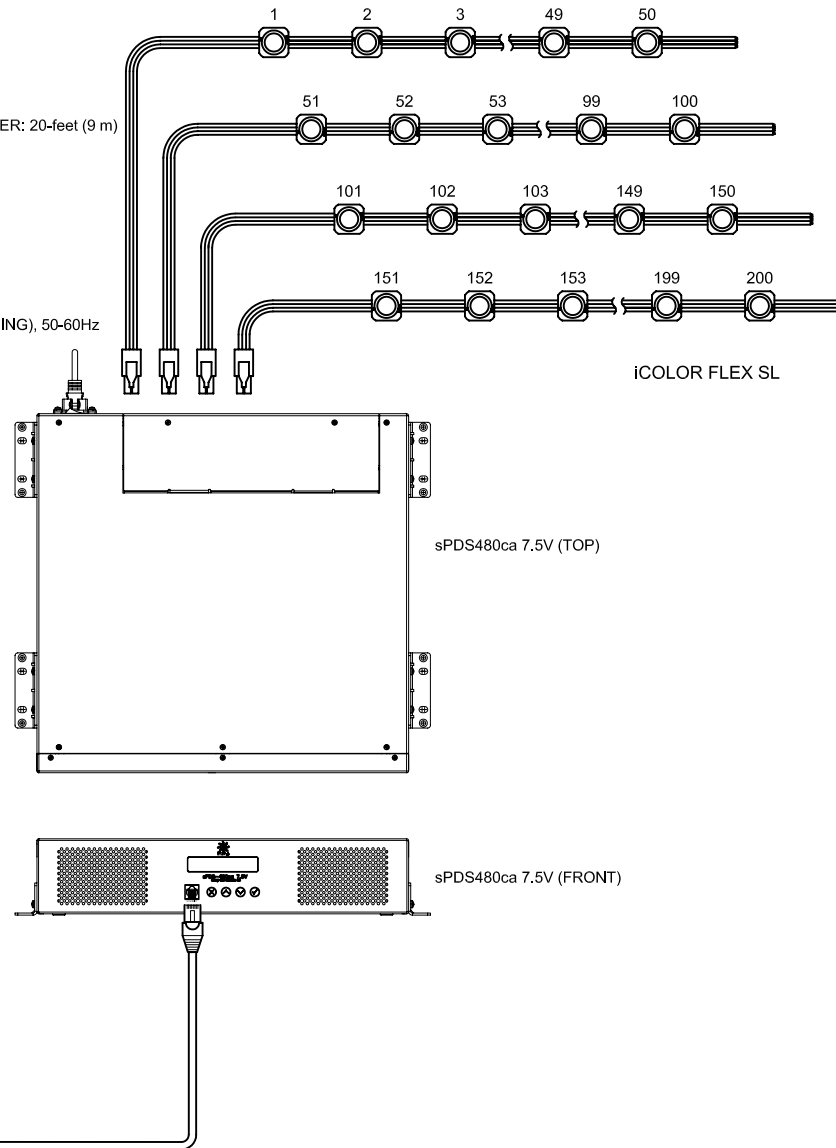

iCOLOR FLEX SL



COLOR KINETICS INCORPORATED  
 10 MILK STREET, SUITE 1100  
 BOSTON, MA 02108  
 888 FULL RGB  
 617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:  
 SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS:  
 FLEX SL / sPDS480ca 7.5V / LSM

DATE:	6-23-2005
DWG. BY:	MJ
SCALE:	NTS
REV:	
PAGE:	1 OF 1