


**NOTE:**

- NEVER USE A DATA TERMINATOR WITH ETHERNET INPUT.
- MAXIMUM NUMBER OF LIGHT NODES PER PDS-60ca:  
100 (50 PER OUTPUT).
- DO NOT SHORTEN OR LENGTHEN LEADER CABLE.  
CUTTING THE LEADER CABLE WILL DAMAGE THE  
DATA DRIVE CIRCUITRY.

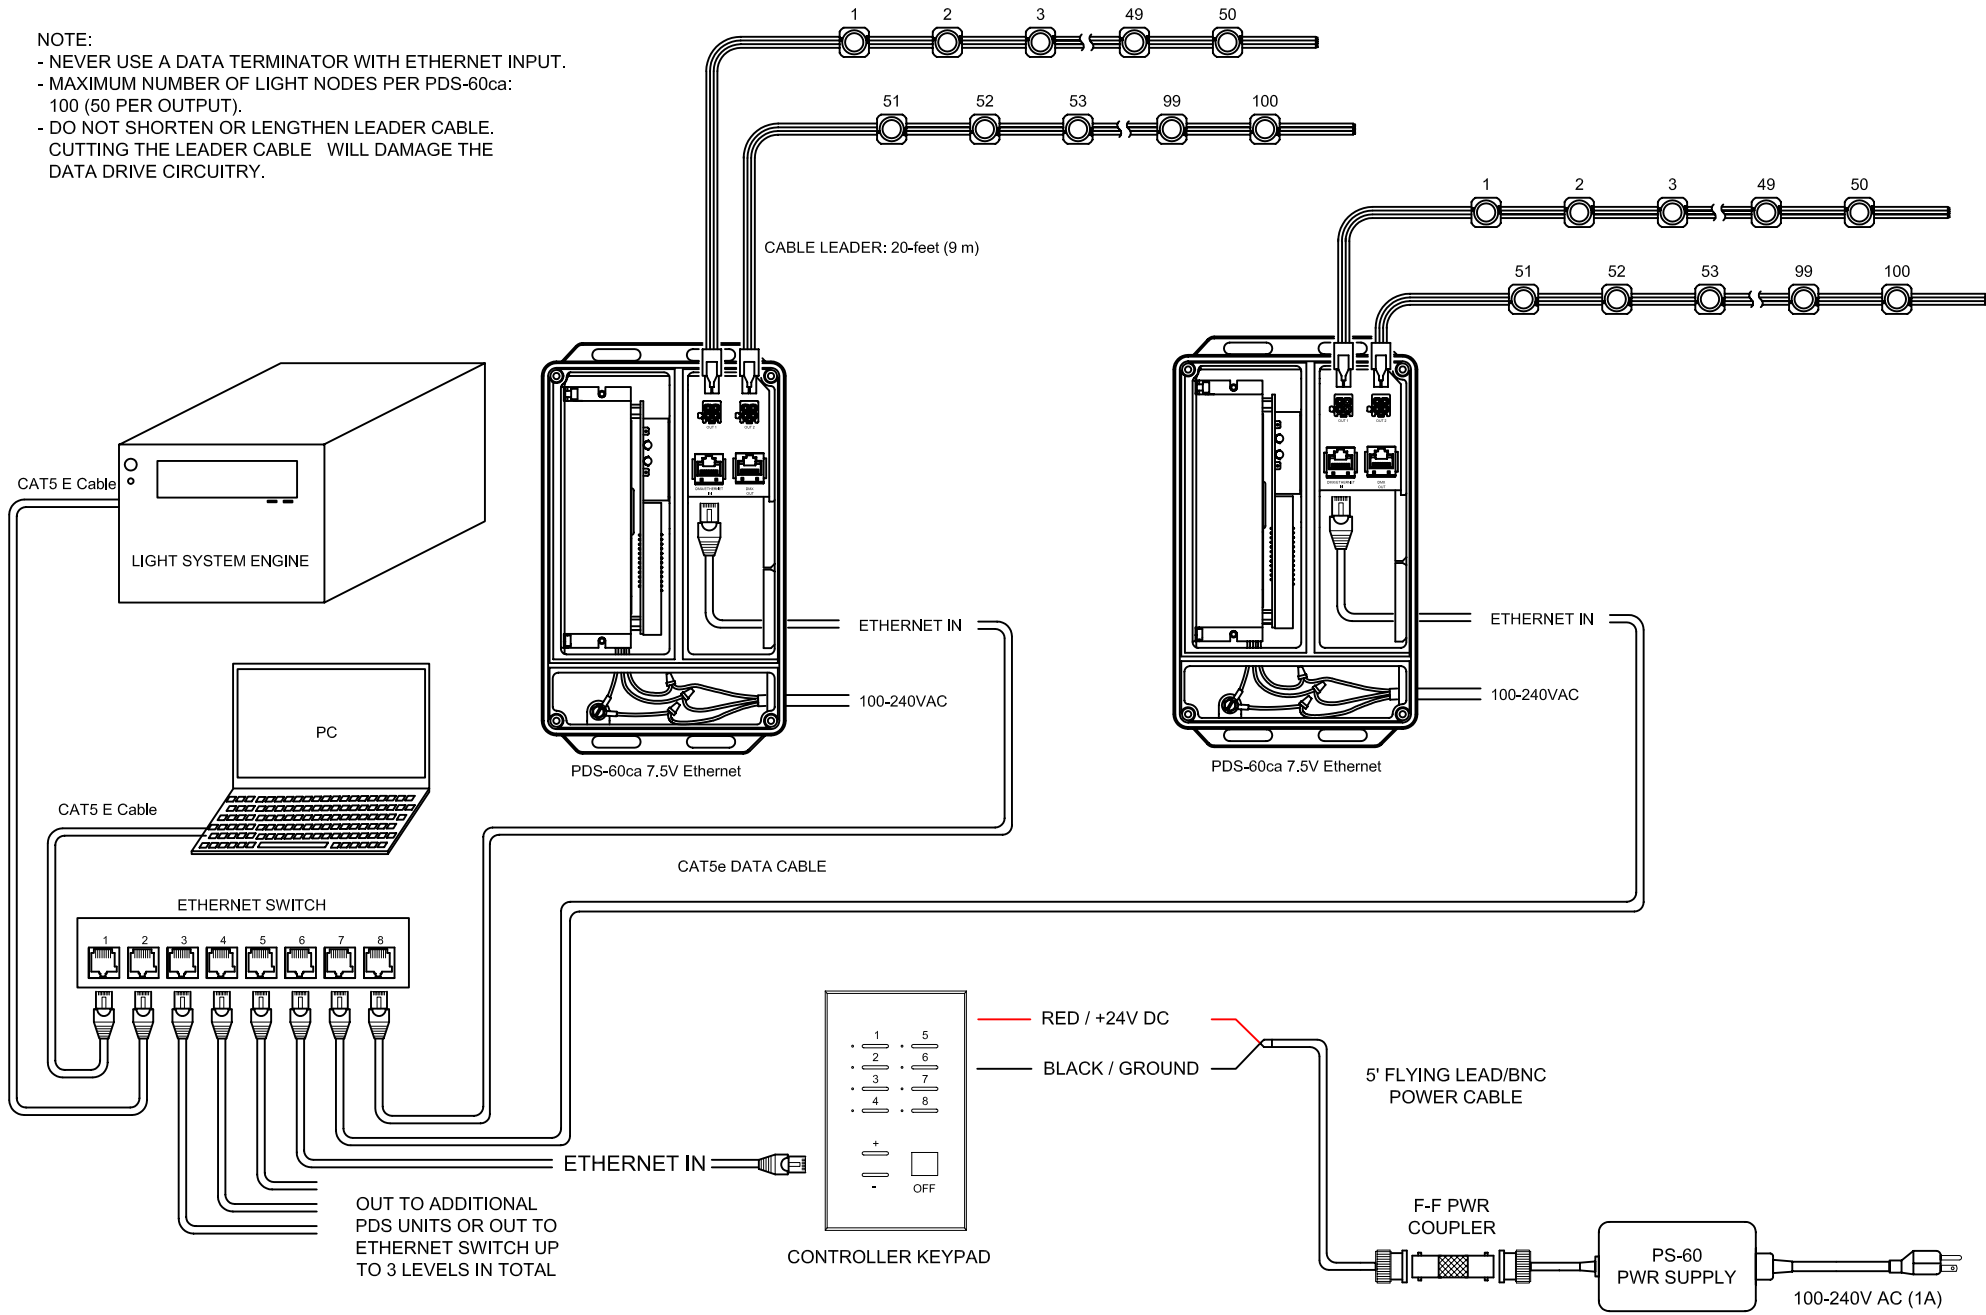

COLOR KINETICS INCORPORATED  
 10 MILK STREET, SUITE 1100  
 BOSTON, MA 02108  
 888 FULL RGB  
 617 423 9999  
 WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	Flex SL / PDS60ca 7.5V / LSM / ECK / PS-60

DATE:	
DWG. BY:	C.F.
SCALE:	NTS
REV:	
PAGE:	1 OF 1