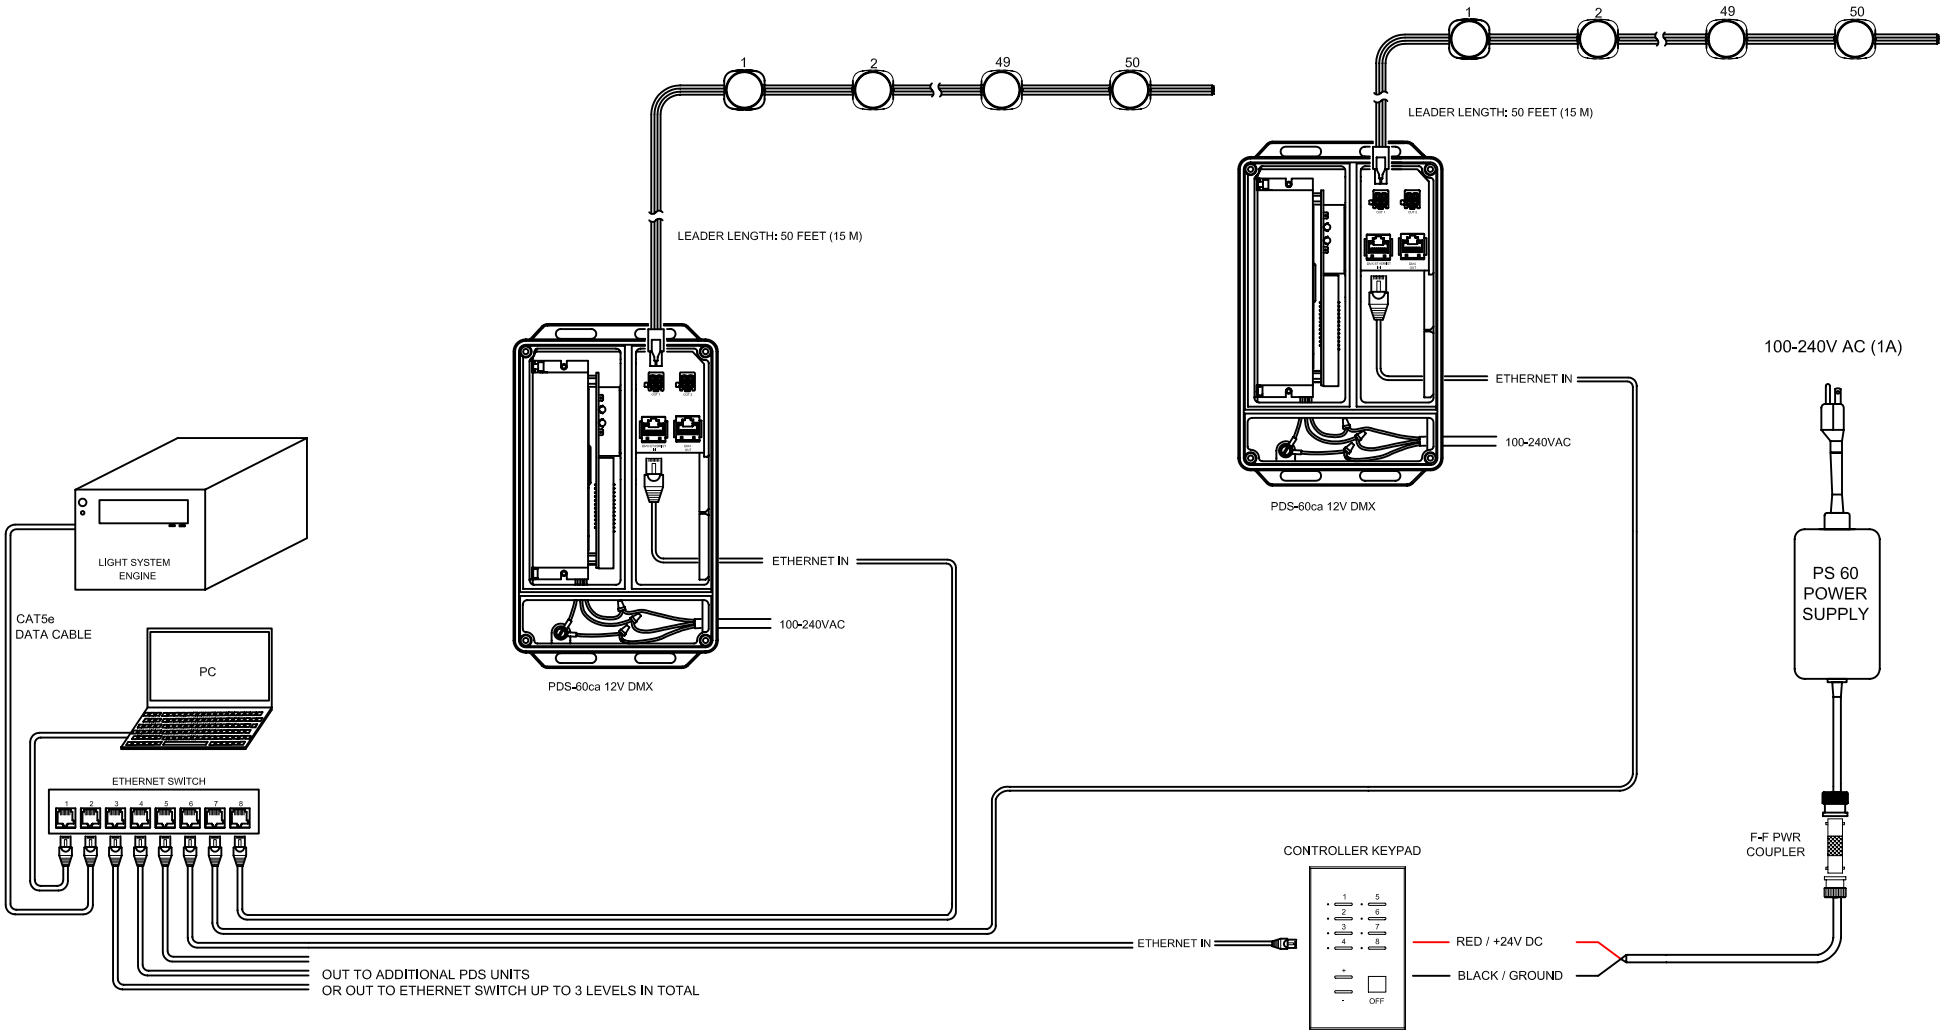

NOTE:
- MAXIMUM CAT5 RUN BETWEEN DEVICES IS 330 FEET (100m). CONTACT COLOR KINETICS TECHNICAL SUPPORT FOR INSTALLATIONS REQUIRING CUSTOM NETWORK CONFIGURATIONS.
- THE LEADER CABLE IS CONNECTORIZED TO ENSURE FAULTLESS WIRING. DO NOT REMOVE OR REPLACE THE FACTORY INSTALLED CONNECTORS.
- DO NOT SHORTEN, LENGTHEN, OR MODIFY THE LEADER CABLE. CUTTING THE LEADER CABLE MAY DAMAGE THE DATA DRIVE CIRCUITRY.
- MAXIMUM NUMBER OF LIGHT NODES PER PDS-60ca: 50 (USE OUTPUT 1).

COLOR KINETICS™

COPYRIGHT © 2007 COLOR KINETICS INCORPORATED. ALL RIGHTS RESERVED. CHROMACORE, CHROMASIC, CK, THE CK LOGO, COLOR KINETICS, THE COLOR KINETICS LOGO, COLOR KINETICS THE LEADER IN INTELLIGENT LIGHT, COLORBLAST, COLORBLAZE, ICOLORBURST, COLORCAST, COLORPLAY, COLORSCAPE, DMAND, DIRECT LIGHT, ESSENTIALWHITE, eW, iCOLOR, iCOLOR COVE, INTELLIWHITE, iW, iPLAYER, LIGHT WITHOUT LIMITS, OPTIBIN, POWERCORE, QUICKPLAY, SAUCE, THE SAUCE LOGO, AND SMARTJUICE ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF COLOR KINETICS INCORPORATED IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

DATA TERMINATOR
NOTE REQUIRED WITH
ETHERNET SYSTEMS

DATA CALBES (UTP)

ACCEPTABLE CABLE TYPES:
CAT-5/CAT-5e/CAT-6
STRAIGHT-THROUGH (T568B)

TITLE: SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS: iCOLOR FLEX SLX/PDS-60ca 12V/LIGHT SYSTEM MANAGER/ETHERNET CONTROLLER KEYPAD/PS-60

DATE:	7-11-2006
DWG. BY:	BHG
SCALE:	NTS
REV:	BHG: 8-3-2007
PAGE:	1 OF 1

COLOR KINETICS INCORPORATED 10 MILK STREET SUITE 1100 BOSTON, MA 02108 TEL 1.888.FULL.RGB TEL 1.617.423.9999 FAX 1.617.423.9998 WWW.COLORKINETICS.COM