



CONTINUE DMX OUT/IN
SEQUENCE TO INCLUDE ALL
PUR/DATA SUPPLIES. THEN
TERMINATE THE LAST UNIT
(SEE BELOW)

NOTE: DATA ENABLER ED CAN SUPPORT THE LETTERS OF IS FIXTURES OR 10FT
OF FIXTURE AND JUMPER COMBINATIONS. FOR CUSTOM INSTALLATIONS CONTACT
TECHNICAL SUPPORT. TECHNICAL SUPPORT REQUIREMENTS:
- TO ADJUST THE PIXEL SIZE OF COLOR ACCENT POWERCORE CONTACT
TECHNICAL SUPPORT. TECHNICAL SUPPORT REQUIREMENTS:
- TO ADJUST THE PIXEL SIZE OF COLOR ACCENT POWERCORE CONTACT
UNIT IN THE DATA-CHAIN IN THE DMX SETUP ON 50FT OF THE LAST PPS
UNIT IN THE DATA-CHAIN

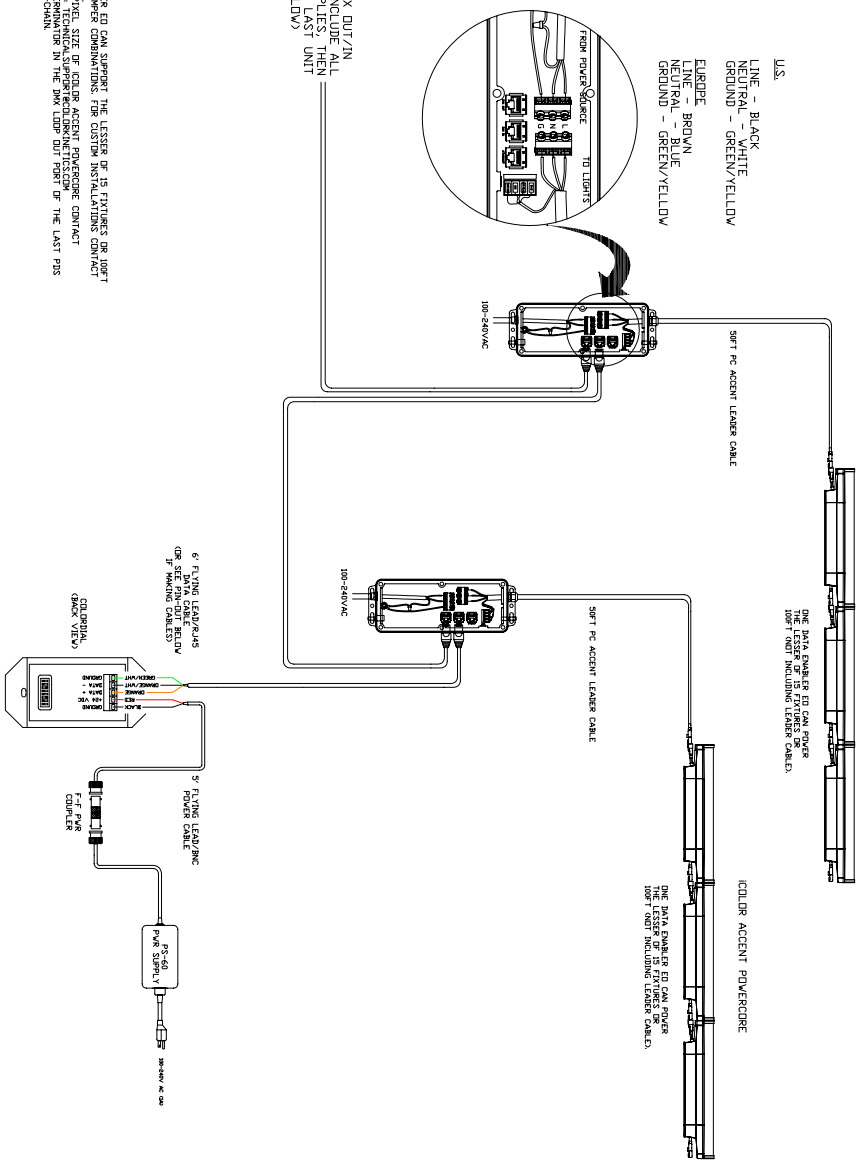

U.S.
LINE - BLACK
NEUTRAL - WHITE
GROUND - GREEN/YELLOW

EUROPE
LINE - BROWN
NEUTRAL - BLUE
GROUND - GREEN/YELLOW



ONE DATA ENABLER ED CAN SUPPORT
THE LETTERS OF IS FIXTURES OR
10FT ONLY INCLUDING LEADER CABLE.

ONE DATA ENABLER ED CAN SUPPORT
THE LETTERS OF IS FIXTURES OR
10FT ONLY INCLUDING LEADER CABLE.



10 MILK STREET SUITE 1100
DENV, CO 80202
888-844-6388
TEL 747-423-9999
WWW.COLORKINETICS.COM

DATA TERMINATOR

PLACE IN DMX LEADER AND FIRST
REQUIREMENT. SEE INSTRUCTIONS.

CAT-5/5RJ45 PIN-DUT

OVER FACING PINS

TITLE SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS COLOR ACCENT POWERCORE/DATA
ENABLER ED/CDR/DH/L/PS-50

DATE: 6-4-2007
DWG. BY: BHG
SCALE: NTS
REV:
PAGE: 1 OF 1