


NOTES:

- STANDARD WIRE HARNESS (SOLD SEPARATELY) IS 50 FT. IN LENGTH WITH 12 CLIPS PRE-INSTALLED ALONG FINAL 13 FT. SECTION THAT SNAP INTO EACH FIXTURE.
- EACH STANDARD HARNESS SUPPORTS A MAX. OF 12-12" FIXTURES, FOR A TOTAL MAX. OF 24-12" FIXTURES PER PDS-150e (OR USE TO MIX 12" AND 6" FIXTURES).
- MAX. TOTAL RUN LENGTH OF HARNESS FROM PDS-150e = 50 FT. (AS SUPPLIED).
- EACH PDS-150e SUPPORTS A MAX. OF 16-6" FIXTURES FOR A TOTAL MAX. OF 32-6" FIXTURES.


iCOLOR COVE, COVE LT, OR COVE NXT 12"




CAUTION: CONNECT ONLY 1 HARNESS TO A FUSE GROUP (2 HARNESSES PER PDS-150e)

WIRE HARNESS FOR iCOLOR COVE 12"  
(USE 2 PER PDS-150e -  
SEE NOTES ABOVE FOR DETAILS)

OUT TO NEXT RUN(S) OF  
iCOLOR COVE FIXTURES

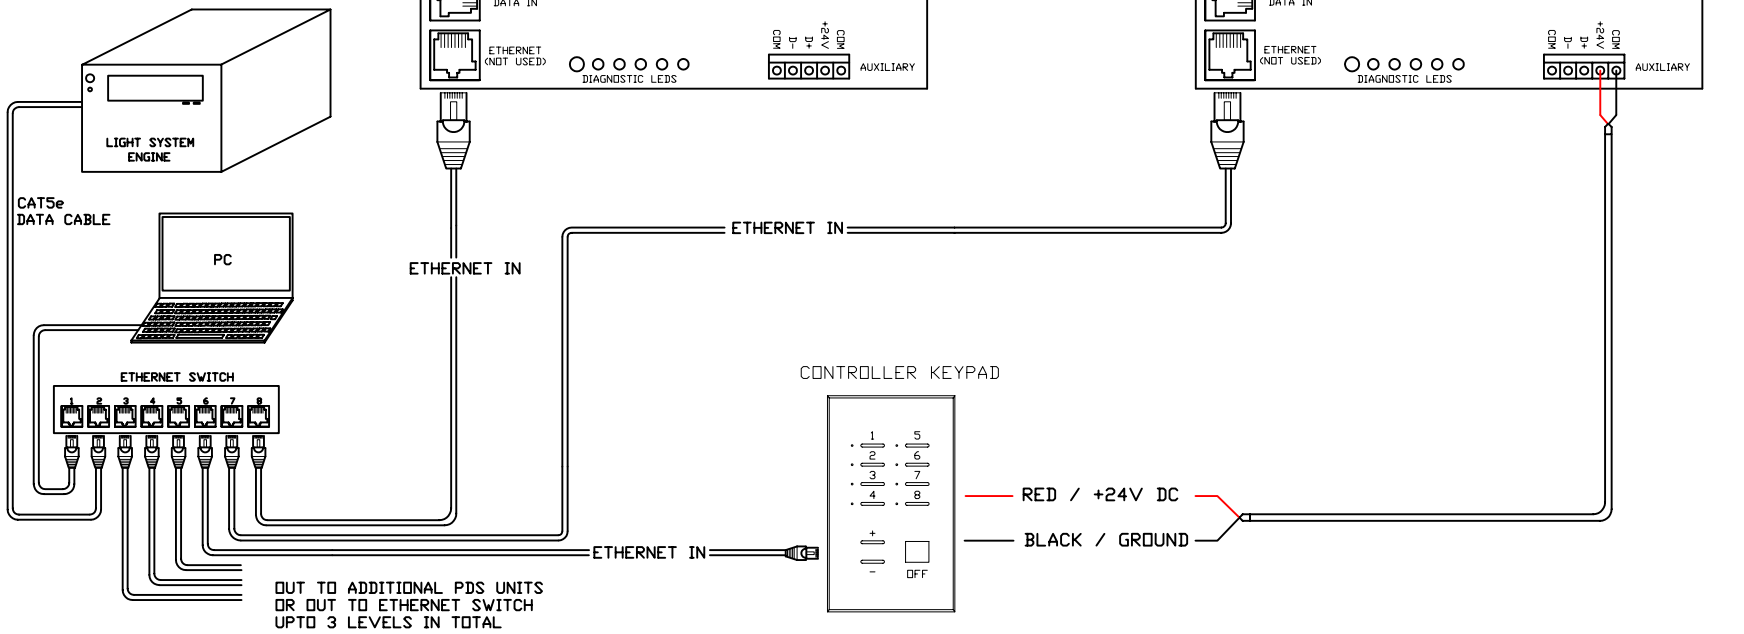

OUT TO ADDITIONAL PDS UNITS  
OR OUT TO ETHERNET SWITCH  
UPTO 3 LEVELS IN TOTAL

 <p>COLOR KINETICS INCORPORATED 10 MILK STREET, SUITE 1100 BOSTON, MA 02108 888 FULL RGB 617 423 9999 WWW.COLORKINETICS.COM</p>	TITLE: SYSTEM WIRING DIAGRAM (TYP)	DATE:
	PRODUCTS: iCOLOR COVE-COVE LT-COVE NXT /PDS-150e/LSM/ECK/PDS-150e	DWG. BY: TC
		SCALE: NTS
		REV:
*FULL SPECTRUM DIGITAL LIGHTING*		PAGE: 1 OF 1