



- NOTES:
- STANDARD WIRE HARNESS (SOLD SEPARATELY) IS 50 FT. IN LENGTH WITH 12 CLIPS PRE-INSTALLED ALONG FINAL 13 FT. SECTION THAT SNAP INTO EACH FIXTURE.
  - EACH STANDARD HARNESS SUPPORTS A MAX. OF 12-6" FIXTURES AND 10-12" FIXTURES PER PDS60 24V.
  - MAX. TOTAL RUN LENGTH OF HARNESS FROM PDS60 24V = 50 FT. (AS SUPPLIED).

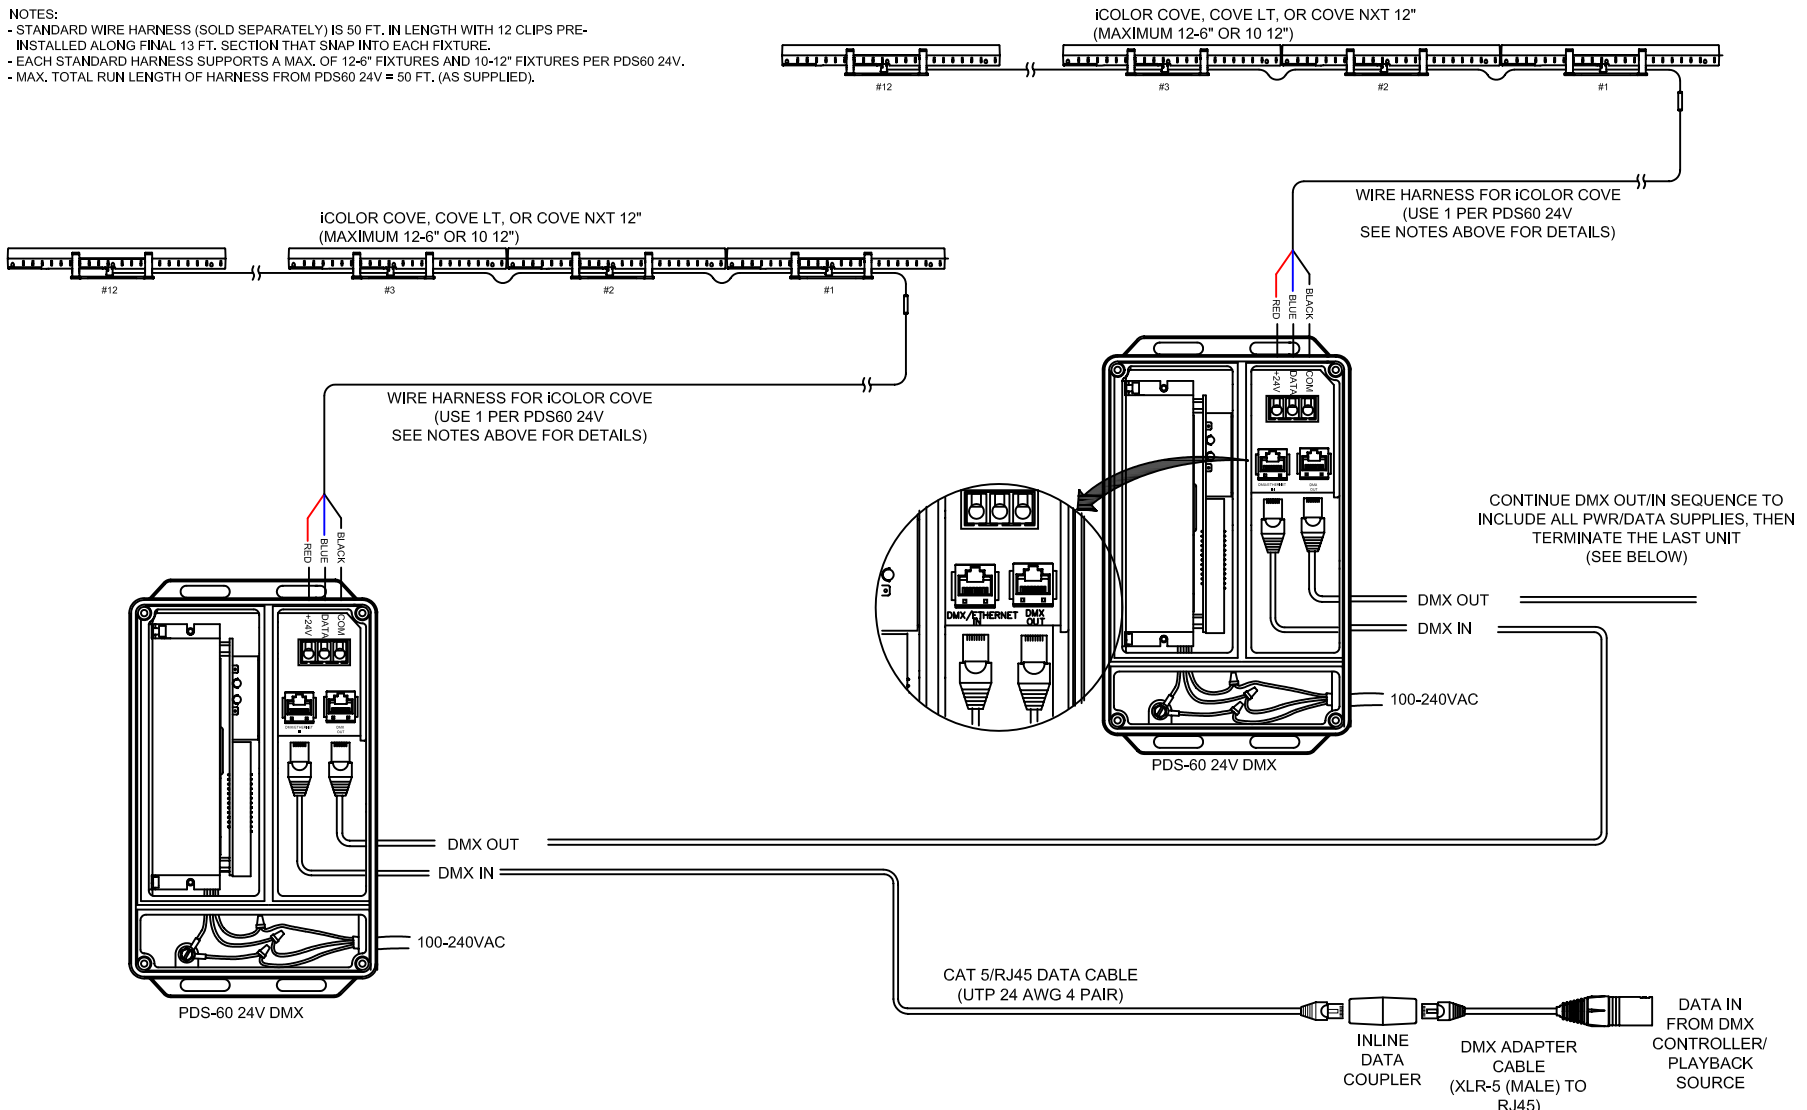

**NOTE:**


- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 12-6", 10-12"

**DATA TERMINATOR**



PLACE IN LAST DMX OUT PORT OF POWER/DATA SUPPLY CHAIN

**CAT-5/RJ45 PIN-OUT**



(1) DATA -  
(2) DATA +  
(3) COM

(VIEW FACING PINS)



COLOR KINETICS INCORPORATED  
 10 MILK STREET, SUITE 1100  
 BOSTON, MA 02108  
 888 FULL RGB  
 617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)  
 "FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)		DATE:
PRODUCTS: ICV / PDS-60 24V / DMX		DWG. BY: S.D.
		SCALE: NTS
		REV:
		PAGE: 1 OF 1