

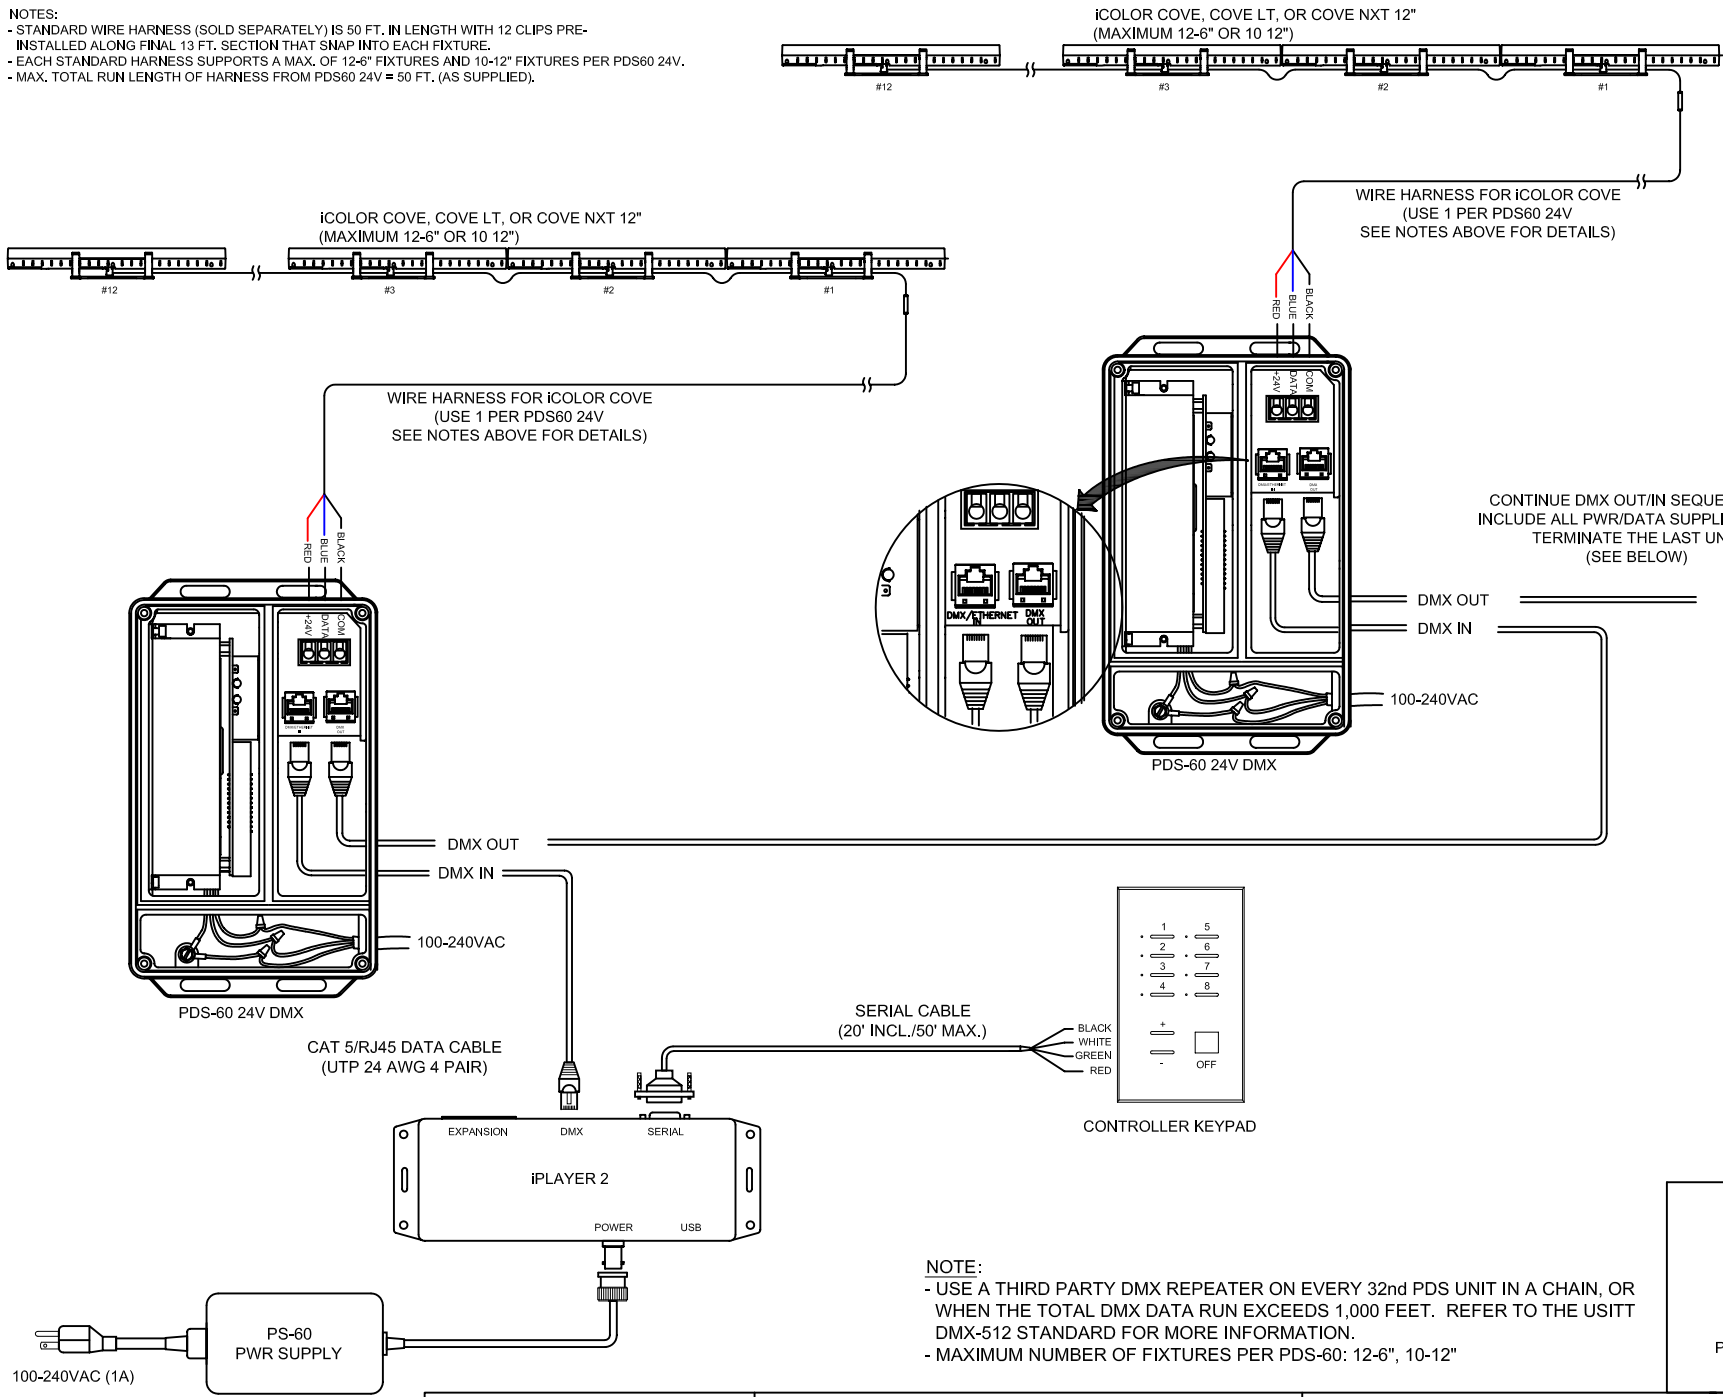


NOTES:  
 - STANDARD WIRE HARNESS (SOLD SEPARATELY) IS 50 FT. IN LENGTH WITH 12 CLIPS PRE-INSTALLED ALONG FINAL 13 FT. SECTION THAT SNAP INTO EACH FIXTURE.  
 - EACH STANDARD HARNESS SUPPORTS A MAX. OF 12-6" FIXTURES AND 10-12" FIXTURES PER PDS60 24V.  
 - MAX. TOTAL RUN LENGTH OF HARNESS FROM PDS60 24V = 50 FT. (AS SUPPLIED).



NOTE:  
 - USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.  
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60: 12-6", 10-12"

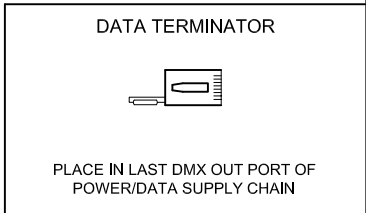

COLOR KINETICS INCORPORATED  
 10 MILK STREET, SUITE 1100  
 BOSTON, MA 02108  
 888 FULL RGB  
 617 423 9999  
 WWW.COLORKINETICS.COM  
 "FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	DATE:
PRODUCTS: ICV / PDS-60 24V / IP2 / P60 / KP	DWG. BY: S.D.
	SCALE: NTS
	REV:
	PAGE: 1 OF 1