



- NOTES:
- STANDARD WIRE HARNESS (SOLD SEPARATELY) IS 50 FT. IN LENGTH WITH 12 CLIPS PRE-INSTALLED ALONG FINAL 13 FT. SECTION THAT SNAP INTO EACH FIXTURE.
  - EACH STANDARD HARNESS SUPPORTS A MAX. OF 12-6" FIXTURES AND 10-12" FIXTURES PER PDS60 24V.
  - MAX. TOTAL RUN LENGTH OF HARNESS FROM PDS60 24V = 50 FT. (AS SUPPLIED).

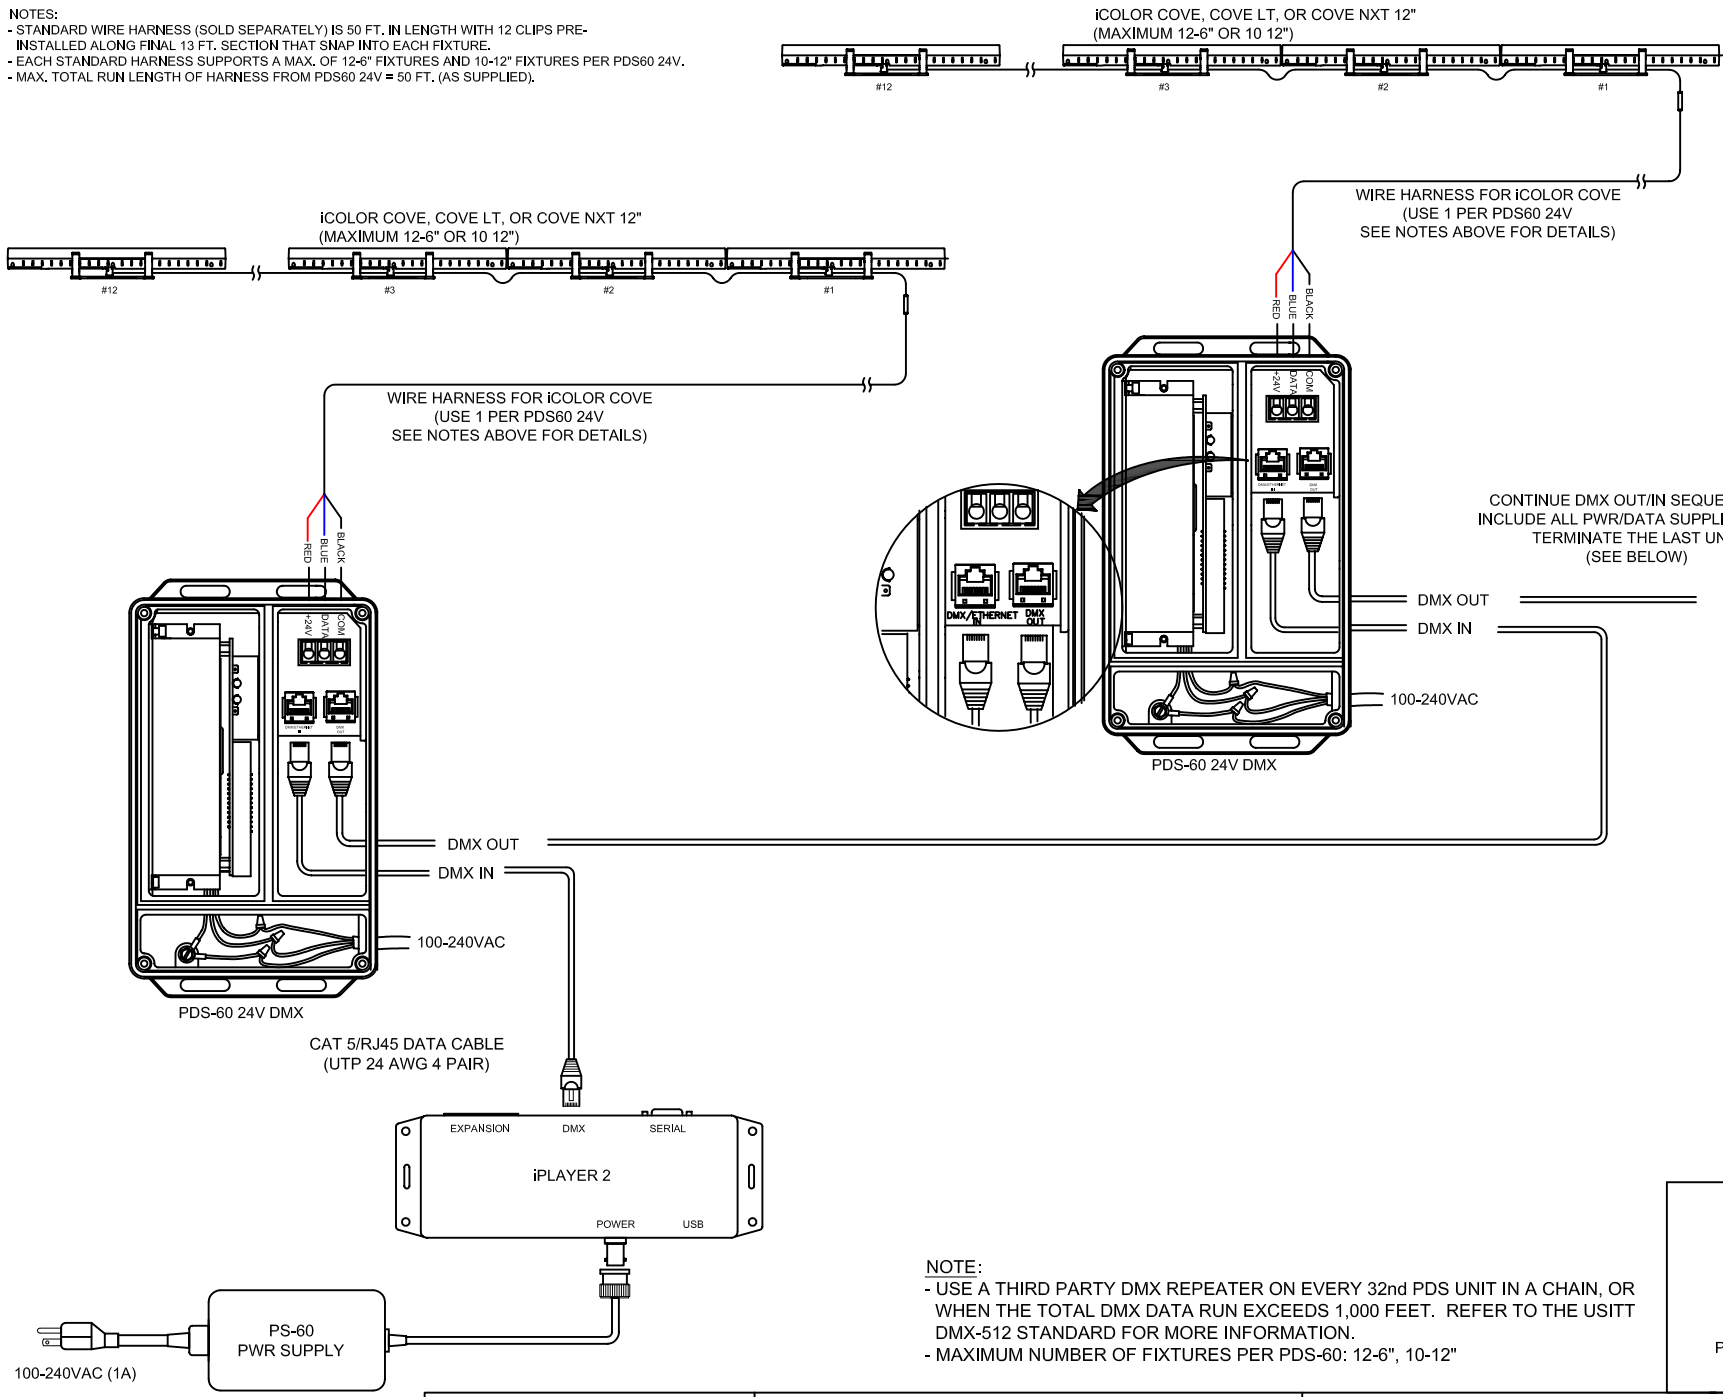


**NOTE:**

- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 12-6", 10-12"

**DATA TERMINATOR**



PLACE IN LAST DMX OUT PORT OF POWER/DATA SUPPLY CHAIN




**COLOR KINETICS INCORPORATED**  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	
PRODUCTS: ICV / PDS-60 24V / IP2 / P60	

DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1