

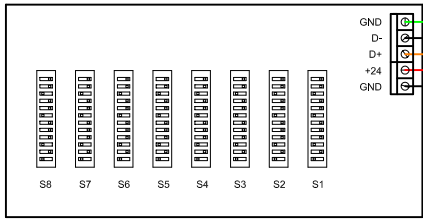

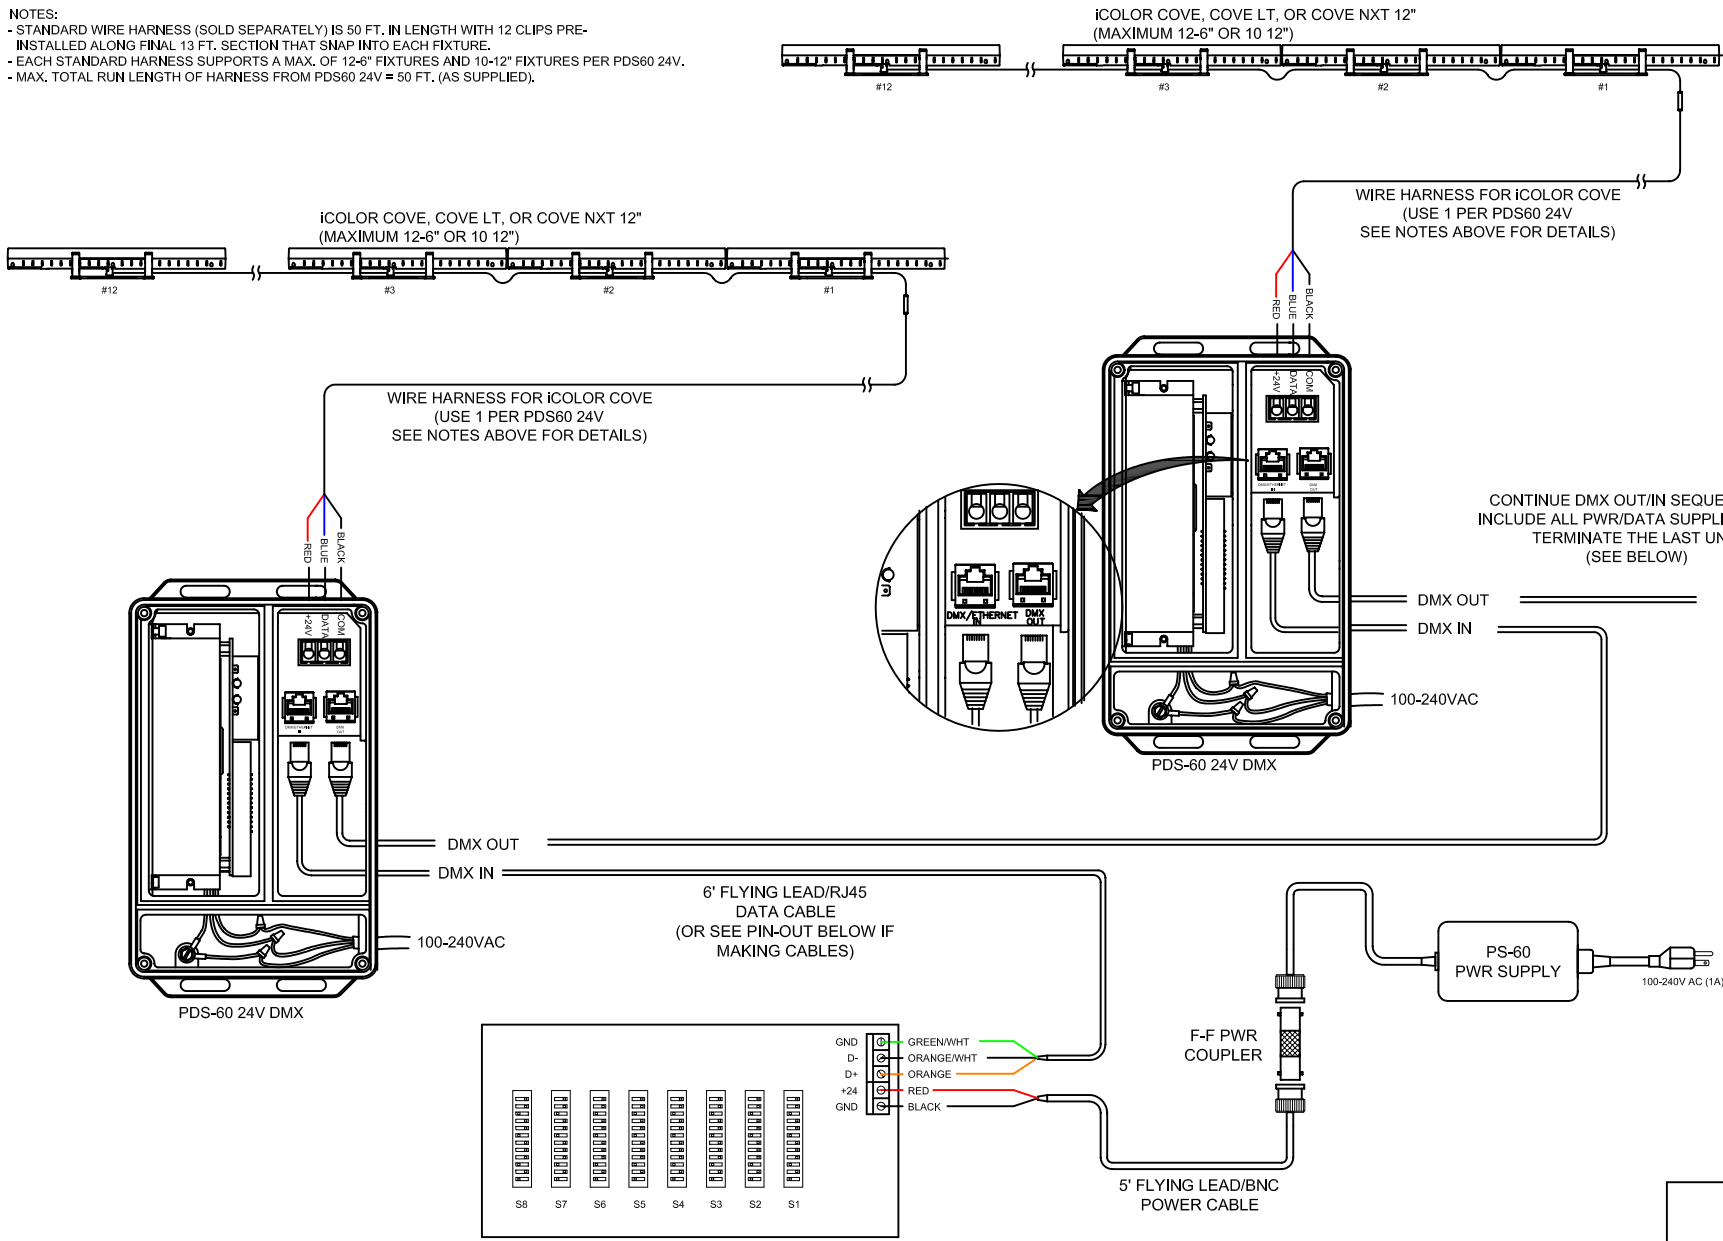


NOTES:
 - STANDARD WIRE HARNESS (SOLD SEPARATELY) IS 50 FT. IN LENGTH WITH 12 CLIPS PRE-INSTALLED ALONG FINAL 13 FT. SECTION THAT SNAP INTO EACH FIXTURE.
 - EACH STANDARD HARNESS SUPPORTS A MAX. OF 12-6" FIXTURES AND 10-12" FIXTURES PER PDS60 24V.
 - MAX. TOTAL RUN LENGTH OF HARNESS FROM PDS60 24V = 50 FT. (AS SUPPLIED).



NOTE:
 - USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60: 12-6", 10-12"

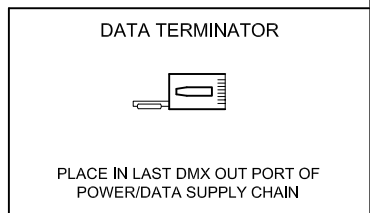

COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
 WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	ICV / PDS-60 24V / MS / P60
DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1