



MAXIMUM NUMBER OF ICOLOR COVE EC FIXTURES PER PDS-60ca = 30 FIXTURES

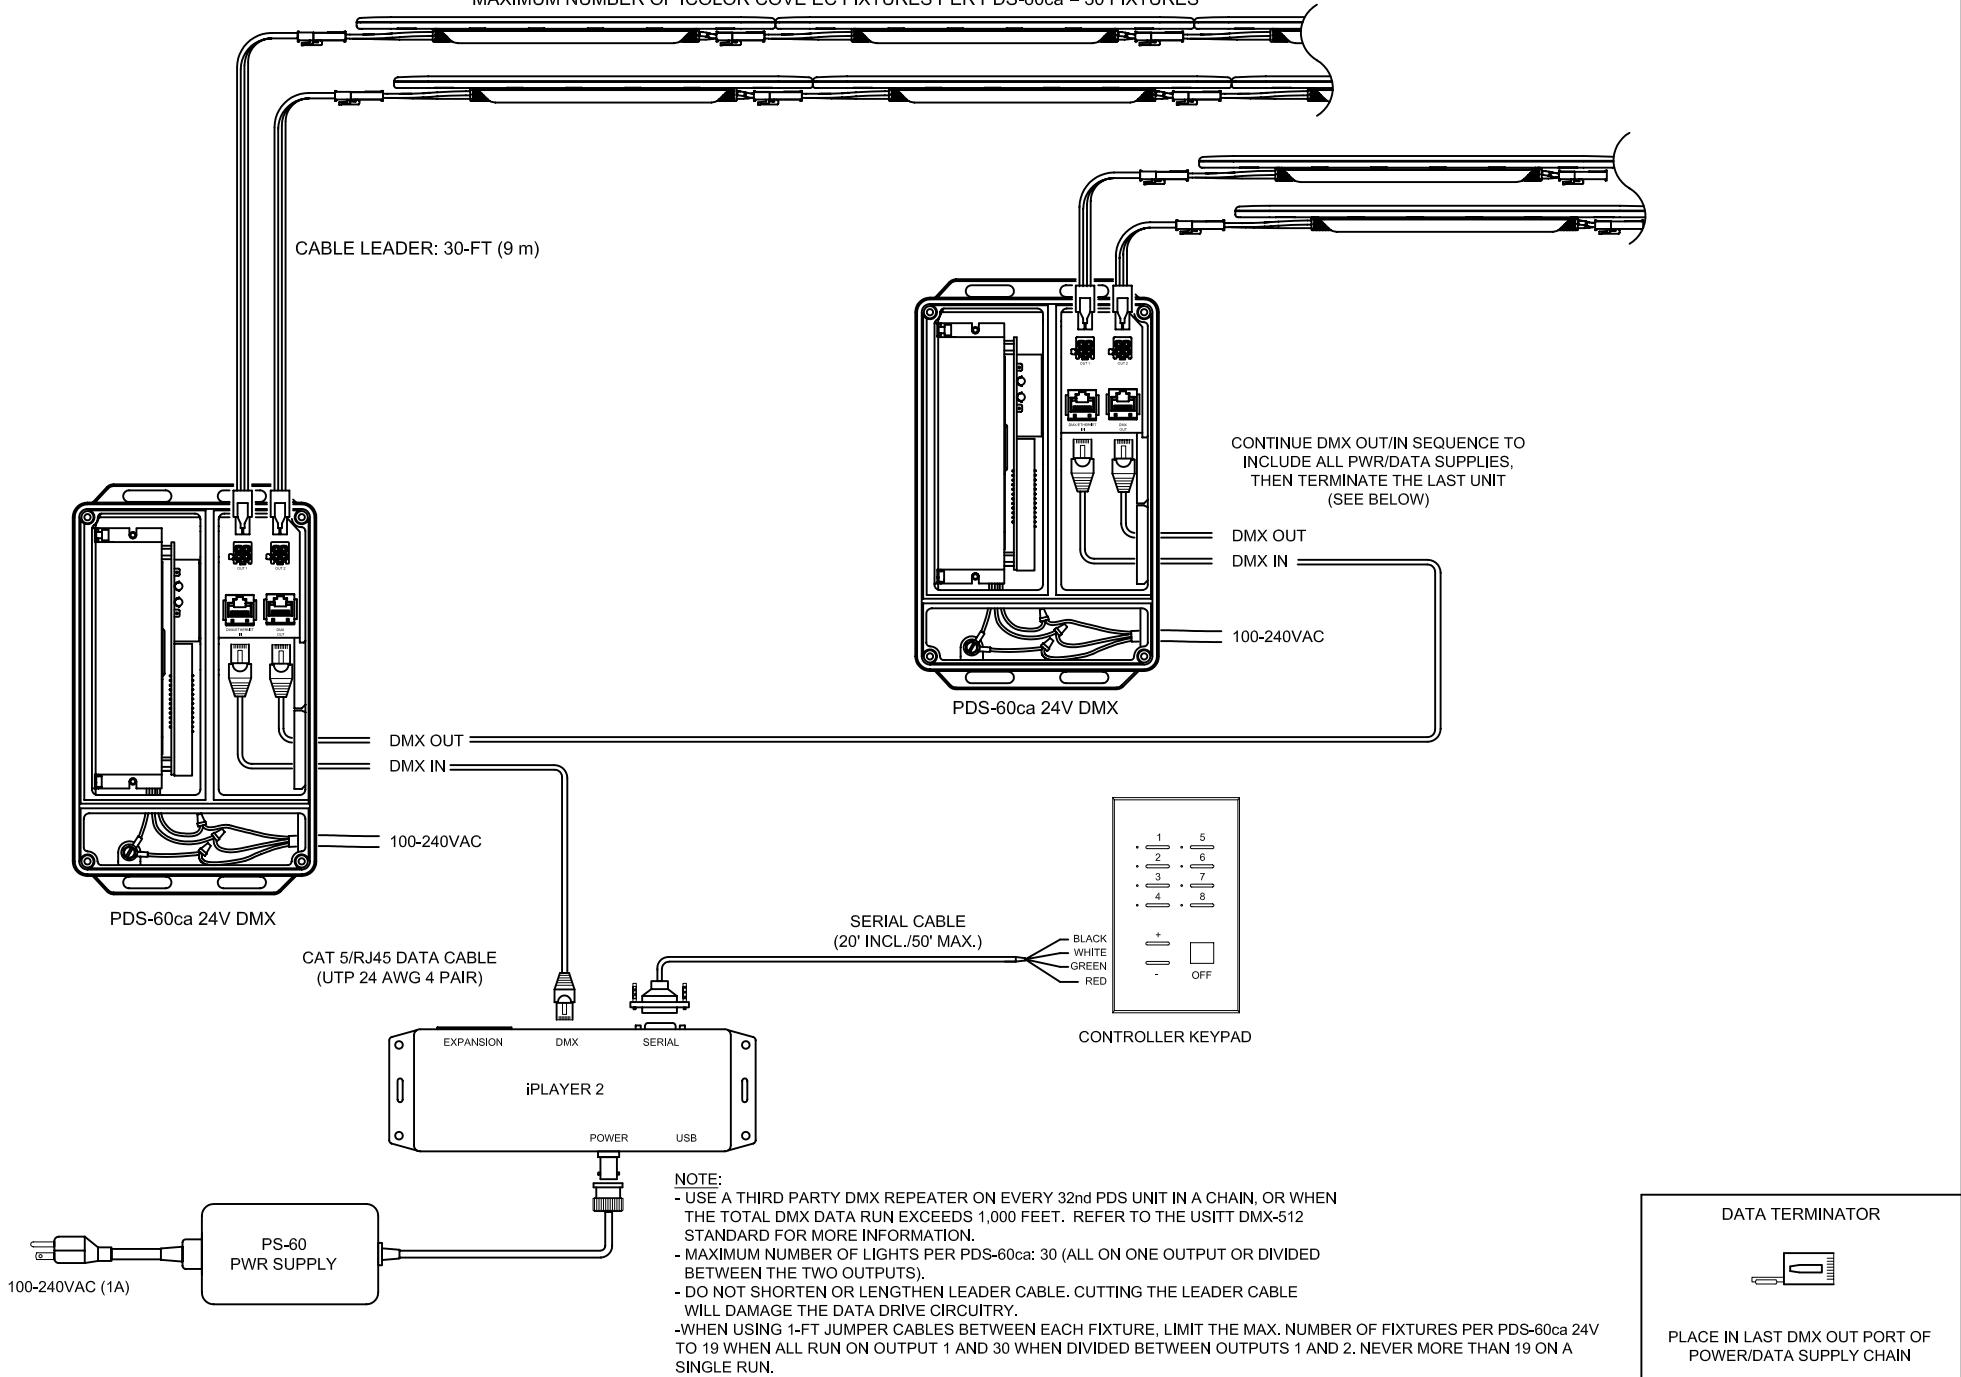

NOTE:

- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
- MAXIMUM NUMBER OF LIGHTS PER PDS-60ca: 30 (ALL ON ONE OUTPUT OR DIVIDED BETWEEN THE TWO OUTPUTS).
- DO NOT SHORTEN OR LENGTHEN LEADER CABLE. CUTTING THE LEADER CABLE WILL DAMAGE THE DATA DRIVE CIRCUITRY.
- WHEN USING 1-FT JUMPER CABLES BETWEEN EACH FIXTURE, LIMIT THE MAX. NUMBER OF FIXTURES PER PDS-60ca 24V TO 19 WHEN ALL RUN ON OUTPUT 1 AND 30 WHEN DIVIDED BETWEEN OUTPUTS 1 AND 2. NEVER MORE THAN 19 ON A SINGLE RUN.



COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
WWW.COLORKINETICS.COM
 "FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	DATE:
PRODUCTS: Cove EC / PDS-60ca-24V / iPlayer2 / PS-60 / Controller Keypad	DWG. BY: C.F.
	SCALE: NTS
	REV:
	PAGE: 1 OF 1