

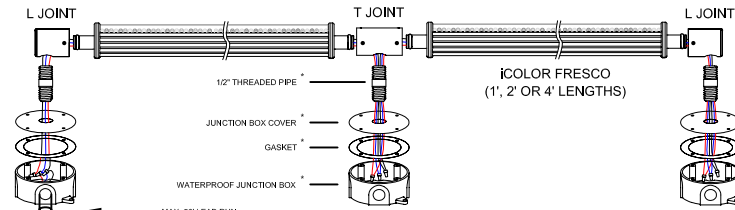
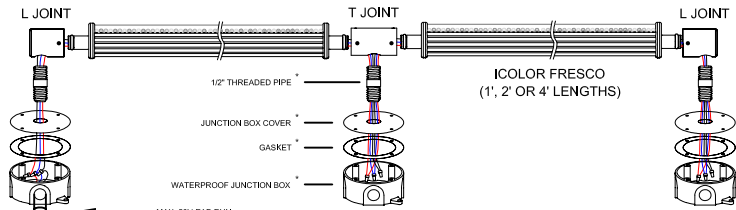


- NOTES:
- EACH PDS60 24V WILL SUPPORT ONE (1) RUN OF ICOLOR FRESCO.
 - EACH RUN CAN CONTAIN A MAX. OF 10 LINEAR FT. OF ICOLOR FRESCO FIXTURES, FOR A TOTAL OF 10 L.F. PER PDS60 24V. (10 - 1', 5 - 2', 2 - 4')
 - USE 3 CONDUCTOR, 14-16 AWG LEAD CABLES (SUPPLIED BY OTHERS) FROM PDS60 24V TO FIRST JUNCTION BOX.
 - MAX. CABLE RUN FROM PDS60 24V TO LAST LIGHT: 50 FEET (15m).



* SUPPLIED BY OTHERS

* SUPPLIED BY OTHERS

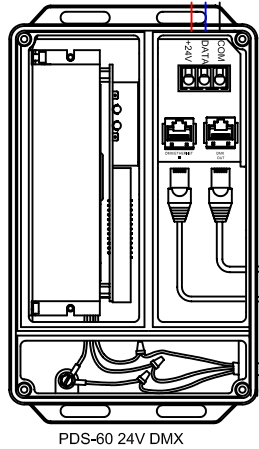


CONTINUE DMX OUT/IN SEQUENCE TO INCLUDE ALL PWR/DATA SUPPLIES, THEN TERMINATE THE LAST UNIT (SEE BELOW)

6' FLYING LEAD/RJ45 DATA CABLE (OR SEE PIN-OUT BELOW IF MAKING CABLES)

5' FLYING LEAD/BNC POWER CABLE

COLORIDIAL (BACK VIEW)

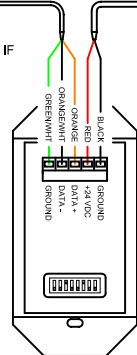

NOTE:

- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
- MAXIMUM NUMBER OF FIXTURES PER PDS-60: 10-1', 5-2', 2-4'

DATA TERMINATOR



PLACE IN LAST DMX OUT PORT OF POWER/DATA SUPPLY CHAIN

CAT-5/RJ45 PIN-OUT



(VIEW FACING PINS)



COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:

SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS:

IFR / PDS-60 24V / CD / PS-60

DATE:

DWG. BY: S.D.

SCALE: NTS

REV:

PAGE: 1 OF 1