

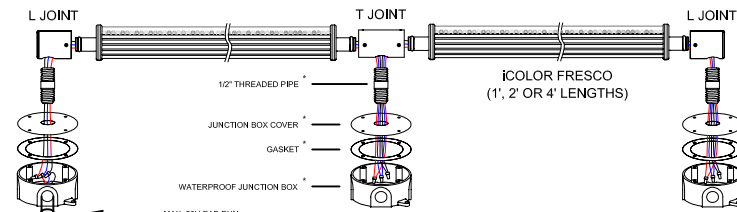
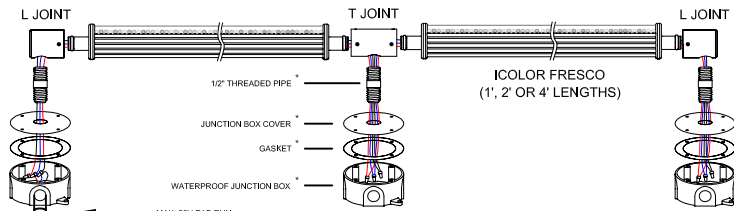


- NOTES:**
- EACH PDS60 24V WILL SUPPORT ONE (1) RUN OF ICOLOR FRESCO.
 - EACH RUN CAN CONTAIN A MAX. OF 10 LINEAR FT. OF ICOLOR FRESCO FIXTURES, FOR A TOTAL OF 10 L.F. PER PDS60 24V. (10 - 1', 5 - 2', 2 - 4')
 - USE 3 CONDUCTOR, 14-16 AWG LEAD CABLES (SUPPLIED BY OTHERS) FROM PDS60 24V TO FIRST JUNCTION BOX.
 - MAX. CABLE RUN FROM PDS60 24V TO LAST LIGHT: 50 FEET (15m).


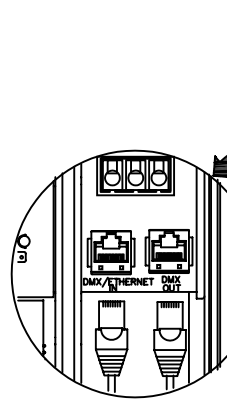


* SUPPLIED BY OTHERS



* SUPPLIED BY OTHERS

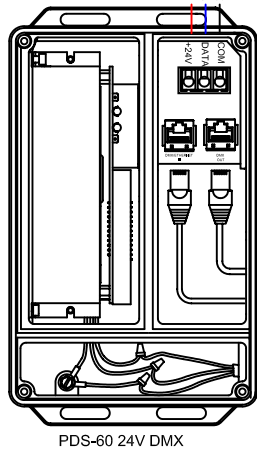

CONTINUE DMX OUT/IN SEQUENCE TO INCLUDE ALL PWR/DATA SUPPLIES, THEN TERMINATE THE LAST UNIT (SEE BELOW)

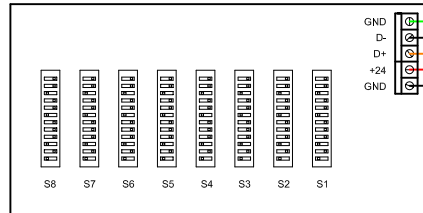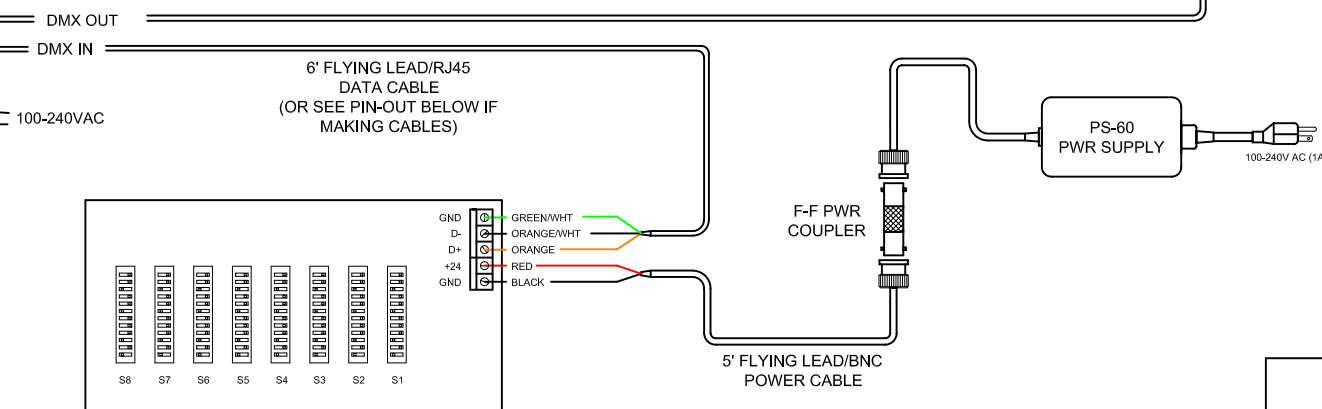

- NOTE:**
- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd PDS UNIT IN A CHAIN, OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1,000 FEET. REFER TO THE USITT DMX-512 STANDARD FOR MORE INFORMATION.
 - MAXIMUM NUMBER OF FIXTURES PER PDS-60: 10-1', 5-2', 2-4'

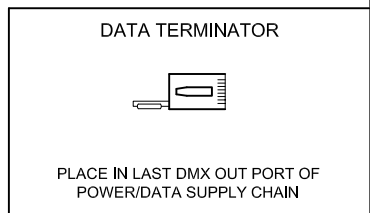

COLOR KINETICS

COLOR KINETICS INCORPORATED
 10 MILK STREET, SUITE 1100
 BOSTON, MA 02108
 888 FULL RGB
 617 423 9999
 WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE: SYSTEM WIRING DIAGRAM (TYP)	
PRODUCTS: IFR / PDS-60 24V / MS / P60	

DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1