


- NOTES:
- EACH PDS60 24V WILL SUPPORT ONE (1) RUN OF iCOLOR FRESCO.
  - EACH RUN CAN CONTAIN A MAX. OF 10 LINEAR FT. OF iCOLOR FRESCO FIXTURES, FOR A TOTAL OF 10 L.F. PER PDS60 24V. (10 - 1', 5 - 2', 2 - 4')
  - USE 3 CONDUCTOR, 14-16 AWG LEAD CABLES (SUPPLIED BY OTHERS) FROM PDS60 24V TO FIRST JUNCTION BOX.
  - MAX. CABLE RUN FROM PDS60 24V TO LAST LIGHT: 50 FEET (15m).



OUT TO ADDITIONAL PDS UNITS  
OR OUT TO ETHERNET SWITCH UP TO 3 LEVELS IN TOTAL

- NOTE:
- NEVER USE A DATA TERMINATOR WITH ETHERNET INPUT.
  - MAXIMUM NUMBER OF FIXTURES PER PDS-60 24V: 10-1', 5-2', 2-4'

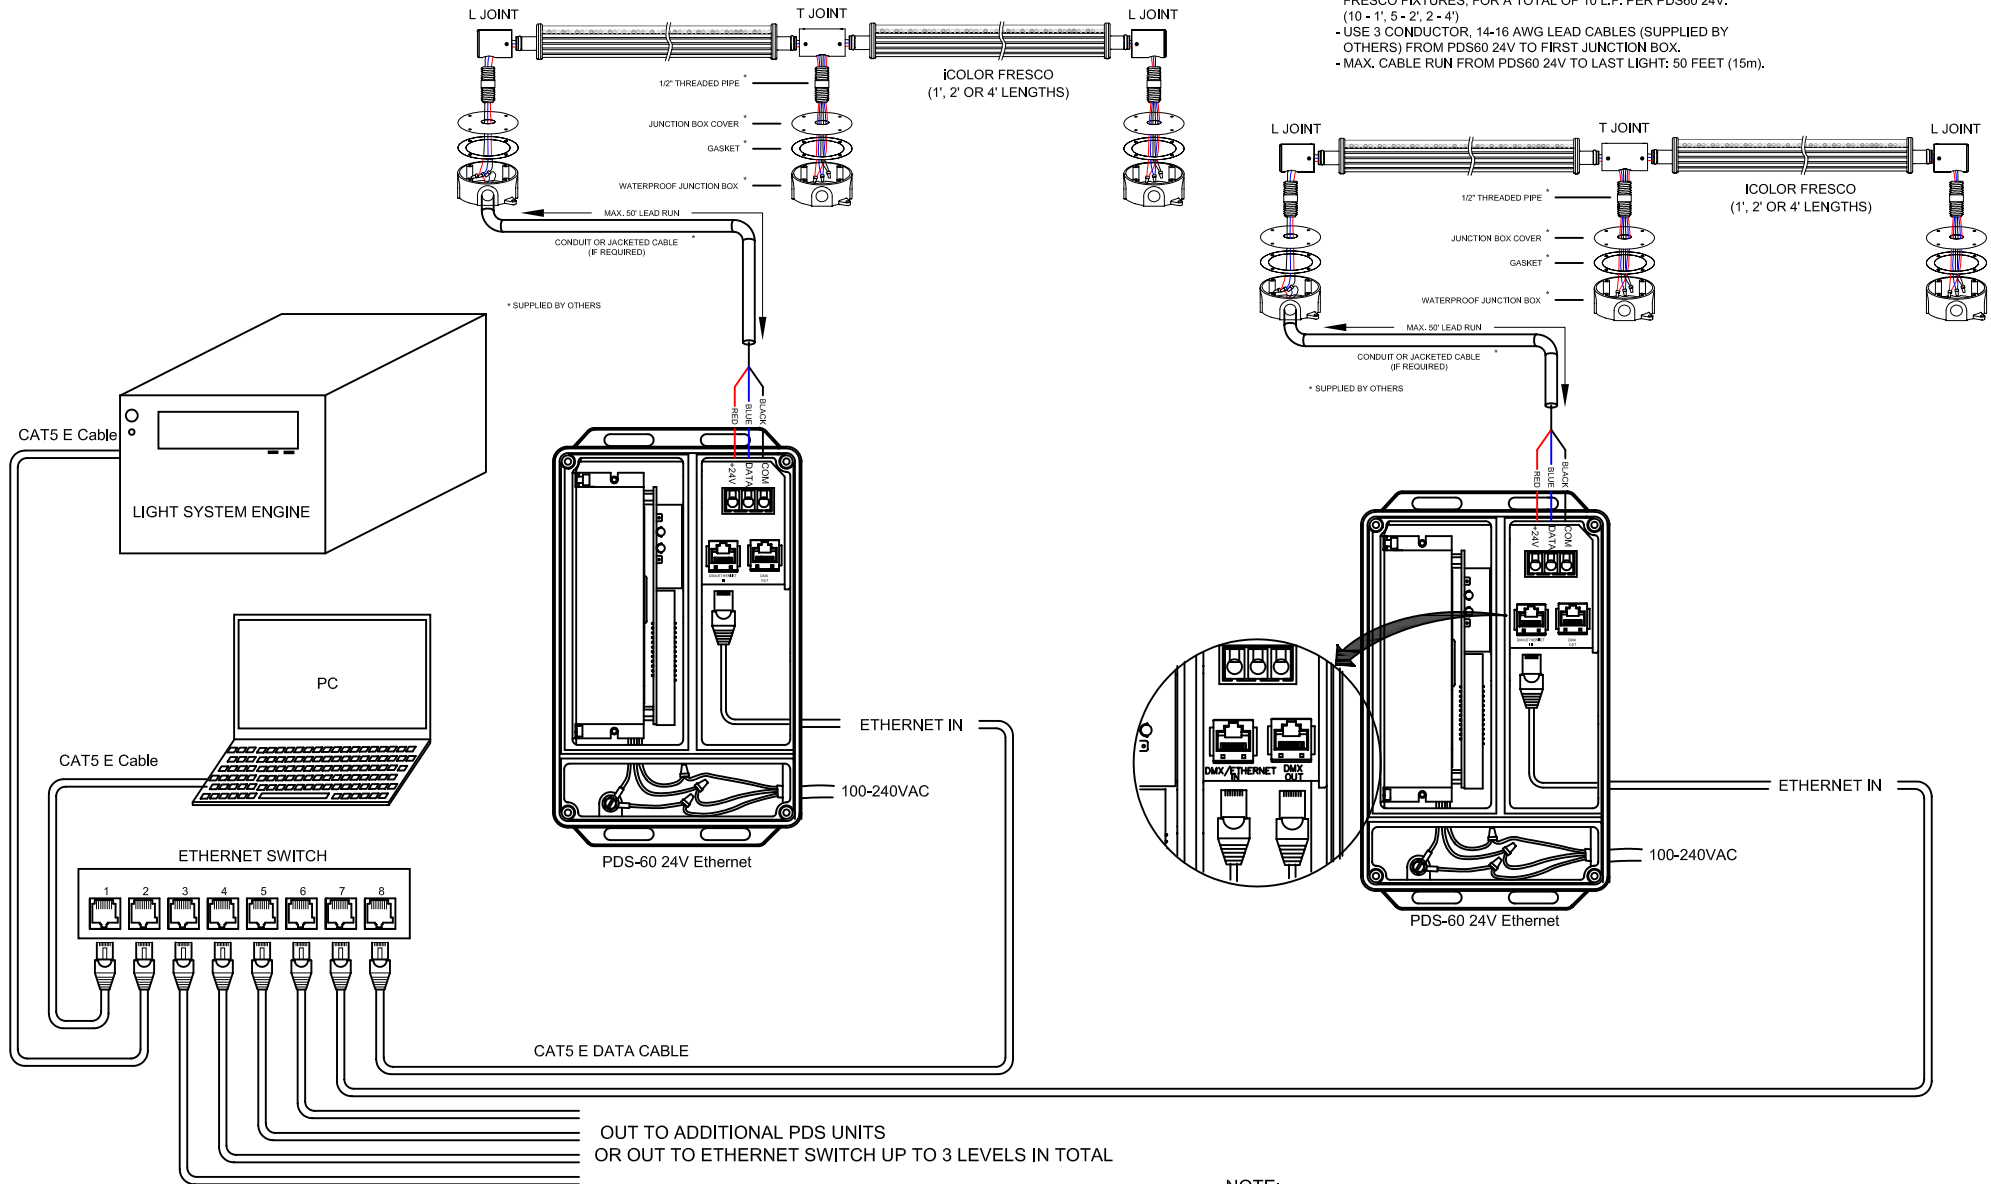

COLOR KINETICS INCORPORATED  
10 MILK STREET, SUITE 1100  
BOSTON, MA 02108  
888 FULL RGB  
617 423 9999  
[WWW.COLORKINETICS.COM](http://WWW.COLORKINETICS.COM)

"FULL SPECTRUM DIGITAL LIGHTING"

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	IFR / PDS60 24V / LSM

DATE:	
DWG. BY:	S.D.
SCALE:	NTS
REV:	
PAGE:	1 OF 1