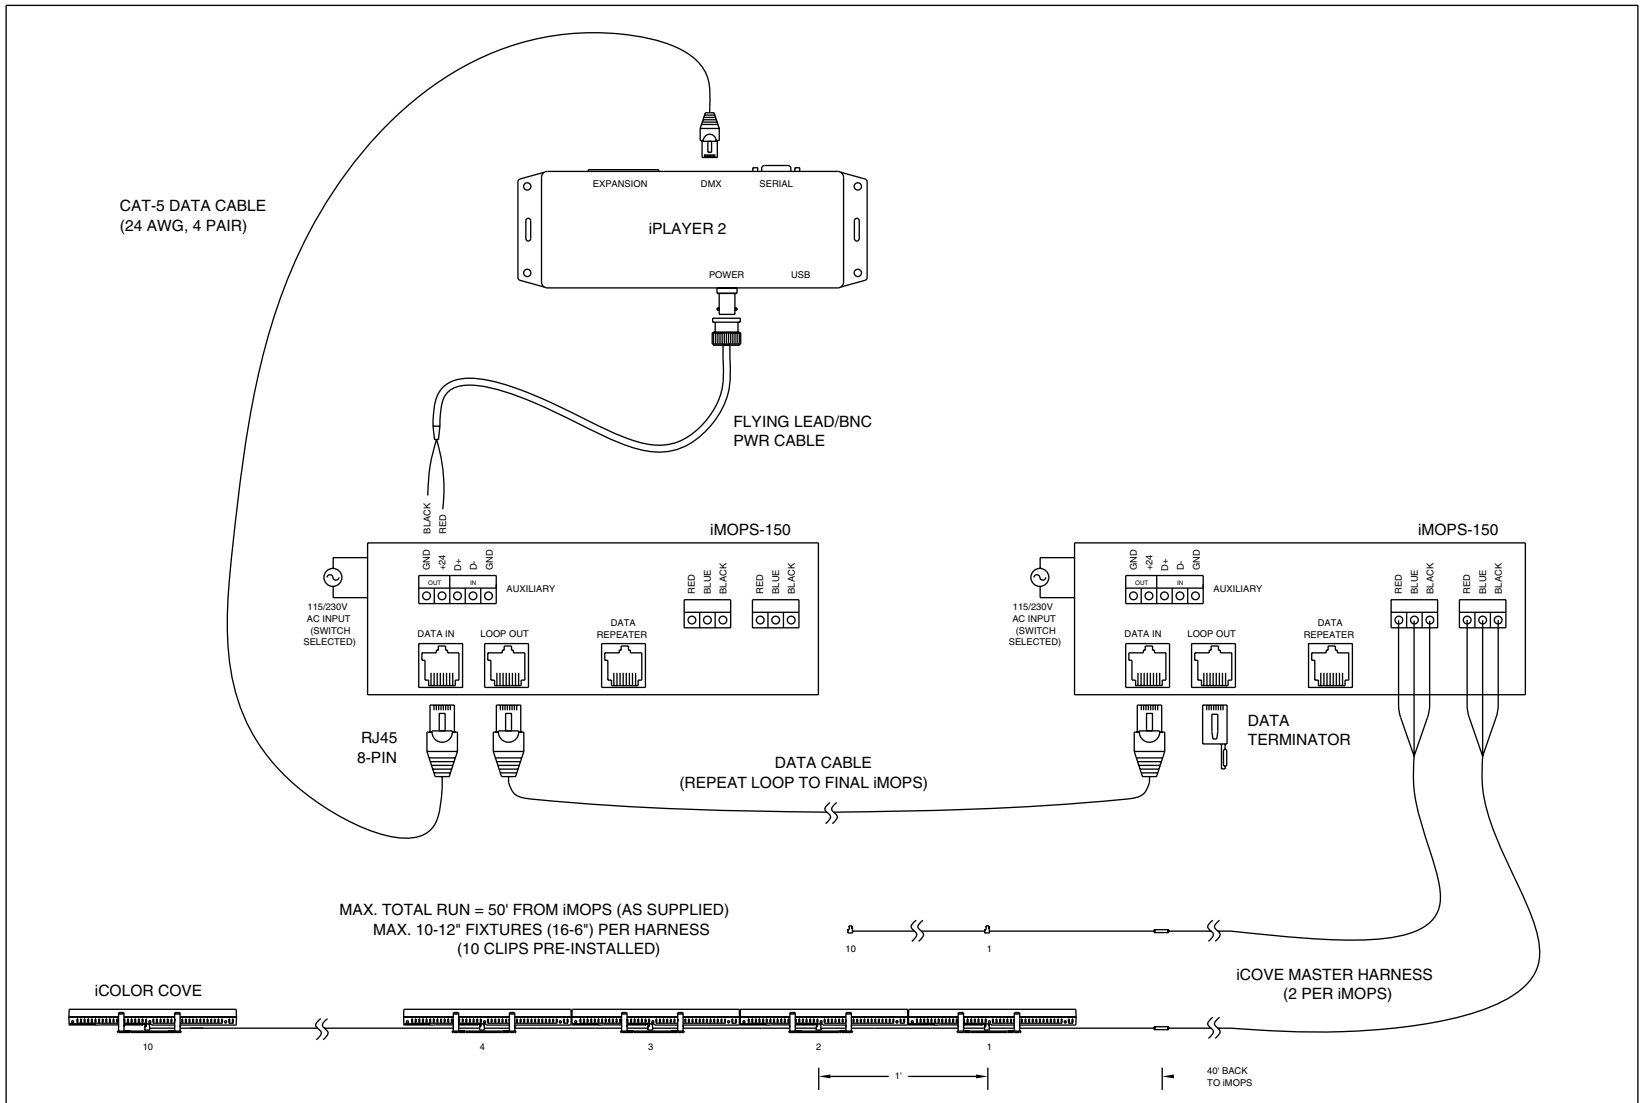

NOTES :
- iMOPS MAX. AC LINE DRAW = 3.2A (115V), OR 1.6A (230V).
- USE DATA REPEATER (OUT) AFTER 31ST iMOPS, OR WHEN DATA CABLE RUN EXCEEDS 100'. WHEN USING THE DATA REPEATER, PLACE A DATA TERMINATOR IN THE LOOP OUT PORT.

COLOR KINETICS INCORPORATED
10 MILK STREET, SUITE 1100
BOSTON, MA 02108
888 FULL RGB
617 423 9999
WWW.COLORKINETICS.COM
"FULL SPECTRUM DIGITAL LIGHTING"

CLIENT:	
TITLE:	iPLAYER 2-iMOPS-iCOVE
DATE:	
DWG. BY:	TC
SCALE:	NTS
REV:	
PAGE:	1 OF 1