


MAXIMUM NUMBER OF FIXTURES PER PDS-60ca 24V: 20 (ALL ON OUTPUT 1 OR DIVIDED BETWEEN OUTPUTS 1 AND 2).

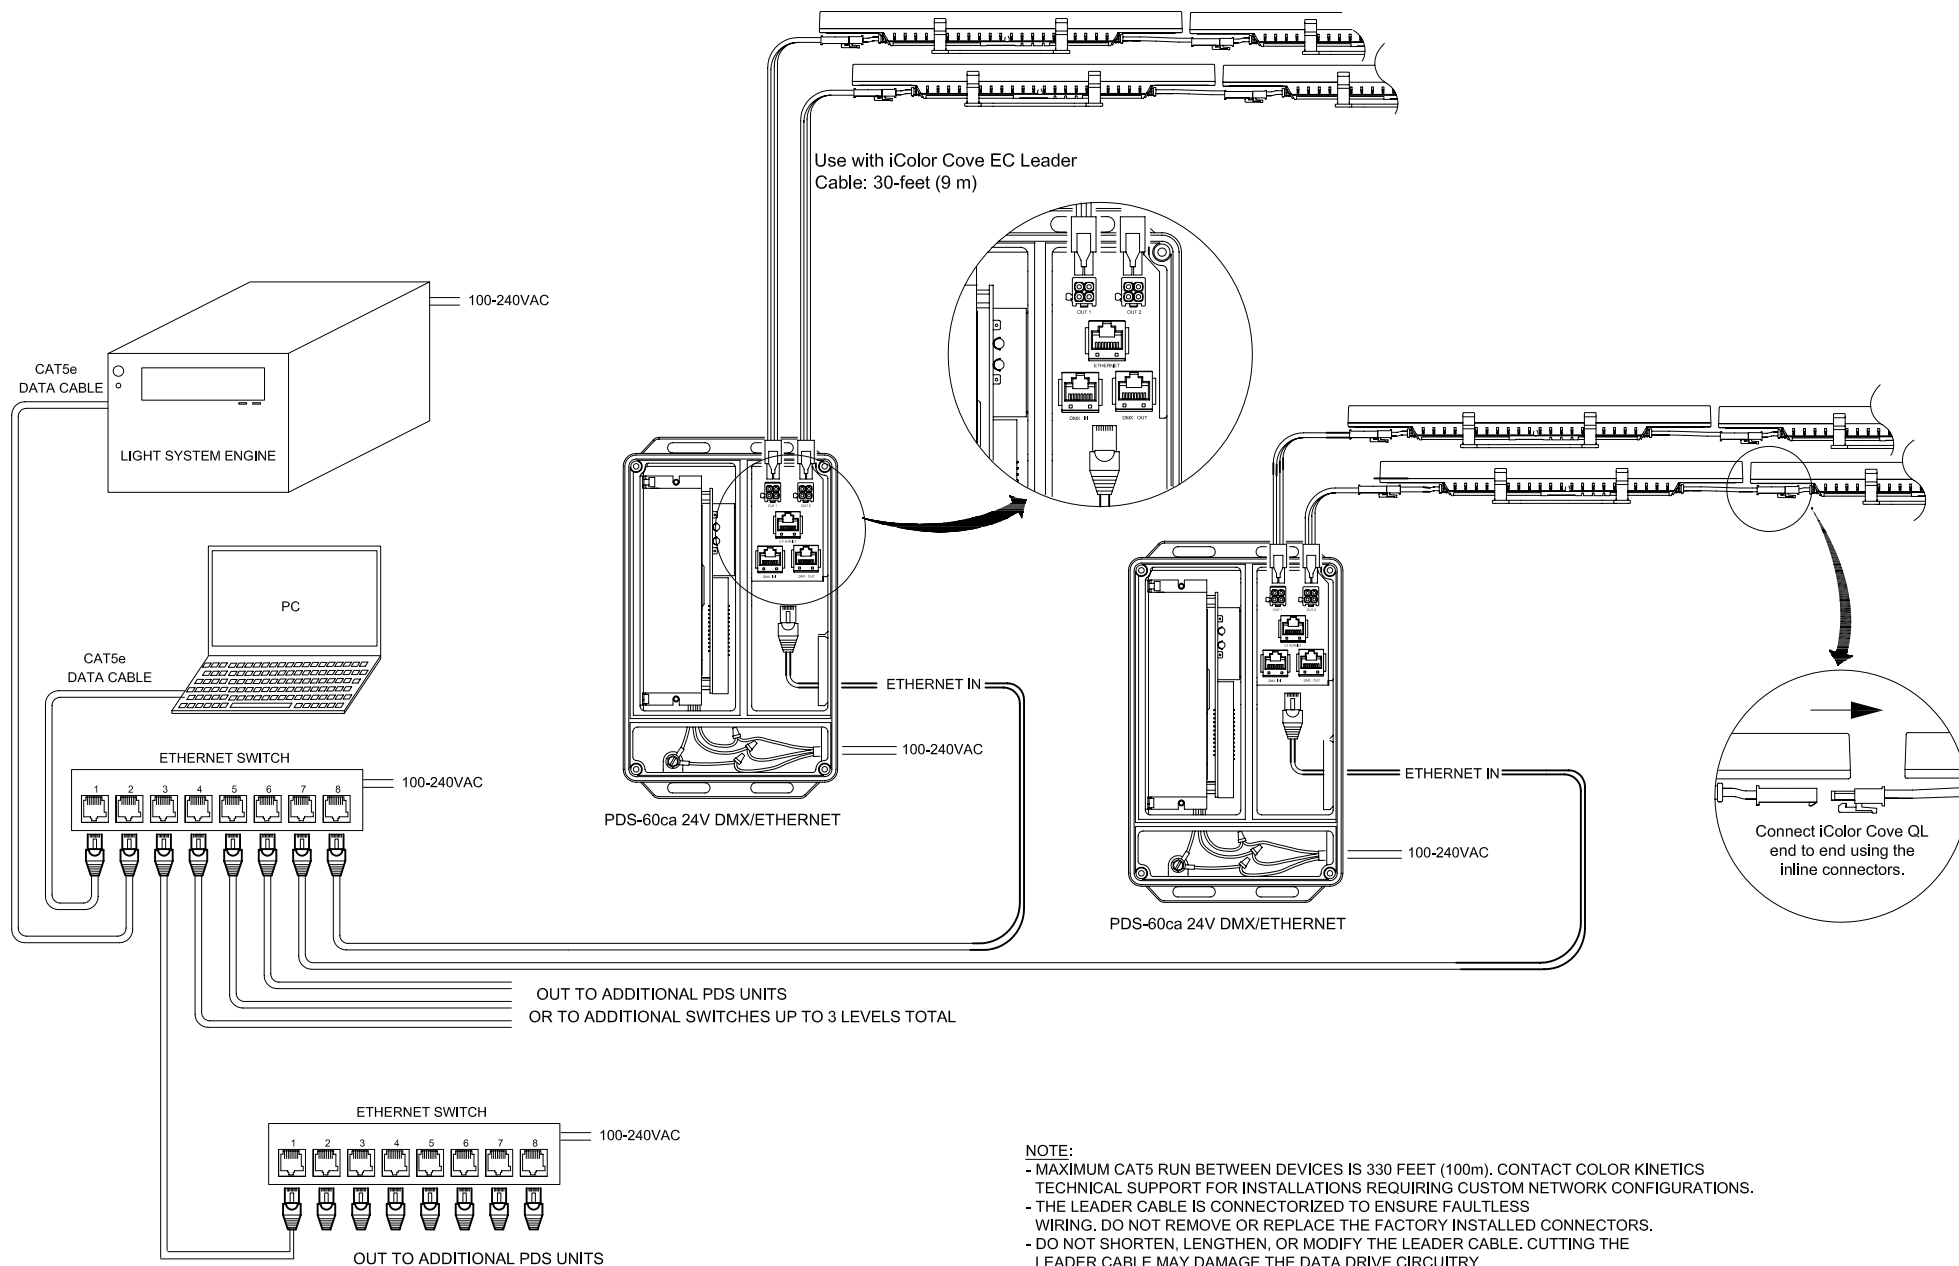

PHILIPS

COPYRIGHT © 2007 PHILIPS SOLID-STATE LIGHTING SOLUTIONS. ALL RIGHTS RESERVED. CHROMACORE, CHROMASC, CL, THE CK LOGO, COLOR KINETICS, THE COLOR KINETICS LOGO, COLOR KINETICS THE LEADER IN INTELLIGENT LIGHT, COLORBLAST, COLORBLAZE, COLORBURST, COLORCAST, COLORPLAY, COLORSCAPE, DIMAND, DIRECT LIGHT, ESSENTIALWHITE, iColor, iColor Cove, INTELLIWHITE, iV, iPLAYER, LIGHT WITHOUT LIMITS, OPTIBEN, POWERCORE, QUICKPLAY, SAUCE, THE SAUCE LOGO, AND SMARTFUSION ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF PHILIPS SOLID-STATE LIGHTING SOLUTIONS IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

DATA TERMINATOR
NOTE REQUIRED WITH
ETHERNET SYSTEMS

DATA CALBES (UTP)

ACCEPTABLE CABLE TYPES:
CAT-5/CAT-5e/CAT-6
STRAIGHT-THROUGH (T568B)

TITLE:

SYSTEM WIRING DIAGRAM (TYP)

PRODUCTS:

iCOLOR COVE QL/PDS-60ca 24V/LIGHT SYSTEM MANAGER

DATE: 3-6-2008

DWG. BY: BHG

SCALE: NTS

REV:

PAGE: 1 OF 1