




Date: \_\_\_\_\_  
Type: \_\_\_\_\_  
Firm Name: \_\_\_\_\_  
Project: \_\_\_\_\_

## SkyRibbon IntelliHue Linear Direct

Recessed linear interior LED luminaire for direct-view and general illumination applications

Introducing SkyRibbon IntelliHue Linear Direct Powercore, a recessed linear interior LED luminaire offering high-quality intelligent color and white light from the same luminaire. IntelliHue is an advanced approach to color mixing that gives users the ability to precisely target a full spectrum of saturated color and high-quality white light, granting an unprecedented level of design freedom. Brilliant light output and industry-leading controls make luminaires ideal for a variety of interior applications. Multiple housing options accommodate a number of installation methods.

- Color-changing and high-quality white light from the same luminaire—Multiple channels of LED light sources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels, and uniform white light.
- Tunable white light—Select color temperatures from 2000 K – 10,000 K with CRI greater than 85 in the 2700 K – 4000 K range.
- Purposefully move off the Black Body Curve—Create pastels and shades of white to match hues of other technologies, such as halogen or fluorescent.

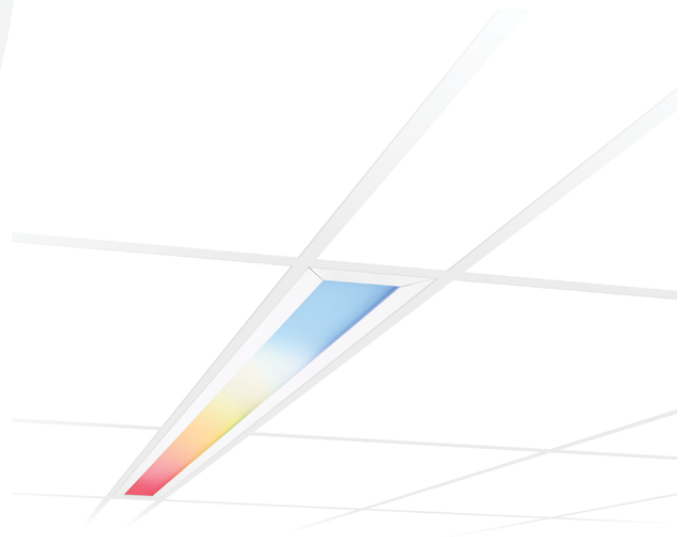

[Product page](#)

|                           |                                                  |
|---------------------------|--------------------------------------------------|
| Beam Angle                | 100° x 100°                                      |
| Lumens @ 4000 K*          | 722 (1 ft)<br>2,888 (4 ft)                       |
| LED Channels <sup>s</sup> | Red/Green/Blue/Mint White/4000 K                 |
| Input Voltage             | 120 VAC/220 to 240 VAC/277 VAC, 50/60 Hz         |
| Weight                    | 2.5 kg (5.5 lb) 305 mm<br>9.5 kg (21 lb) 1219 mm |
| Housing Material          | Steel, white powder-coated finish                |
| Approbations              | UL/cUL, FCC Class A, CE                          |
| Environment               | Dry/Damp Location, IP20                          |
| Applications              | Direct View                                      |

### Specification Sheets

| PDF Download                               | Beam Angle  | Lumens @ 4000 K* | Efficacy | Power | Weight          | Item Number   | 12 NC        |
|--------------------------------------------|-------------|------------------|----------|-------|-----------------|---------------|--------------|
| <a href="#">120 VAC, 305 mm (1 ft)</a>     | 100° x 100° | 722              | 26.4     | 25 W  | 2.5 kg (5.5 lb) | 123-000074-00 | 910503702671 |
| <a href="#">120 VAC, 1219 mm (4 ft)</a>    | 100° x 100° | 2,888            | 26.4     | 100 W | 9.5 kg (21 lb)  | 123-000074-01 | 910503702672 |
| <a href="#">220–240 VAC, 305 mm (1 ft)</a> | 100° x 100° | 722              | 26.4     | 23 W  | 2.5 kg (5.5 lb) | 123-000074-00 | 910503702671 |

## Specification Sheets (cont.)

| PDF Download                                | Beam Angle  | Lumens @ 4000 K* | Efficacy | Power | Weight          | Item Number   | 12 NC        |
|---------------------------------------------|-------------|------------------|----------|-------|-----------------|---------------|--------------|
| <a href="#">220-240 VAC, 1219 mm (4 ft)</a> | 100° x 100° | 2,888            | 26.4     | 90 W  | 9.5 kg (21 lb)  | 123-000074-01 | 910503702672 |
| <a href="#">277 VAC, 305 mm (1 ft)</a>      | 100° x 100° | 722              | 26.4     | 25 W  | 2.5 kg (5.5 lb) | 123-000074-00 | 910503702671 |
| <a href="#">277 VAC, 1219 mm (4 ft)</a>     | 100° x 100° | 2,888            | 26.4     | 100 W | 9.5 kg (21 lb)  | 123-000074-01 | 910503702672 |

\* Lumen output measurements comply with IES LM-79-08 testing procedures.

<sup>5</sup> Correlated color temperature (CCT) complies with ANSI C78.377-2008 for the chromaticity of solid state lighting products.