

4 Conductor Flex Leader Cable

Date: _____
Type: _____
Firm Name: _____
Project: _____

30.5 m (100 ft), Black, Connecting all Flex Compact or Flex Micro to sPDS-480ca or PDS-60ca Power/Data Supplies

LEADER CABLE

For use with sPDS-480ca or PDS-60ca Power/Data Supplies



Specifications

Due to continuous improvements and innovations, specifications may change without notice.


Physical

Dimensions	30480 mm (1200 in) (Length)
Weight	1.88 kg (4.14 lb)
Connections	Self-locking, male-female connector and 4-pin connector
Cable	4 conductor 1 pair stranded bare copper, 2 core stranded tinned copper
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Wire Gauge Size	Two 16 AWG solid, two 24 AWG stranded
Voltage	75 W maximum at 24 VDC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

Dimensions

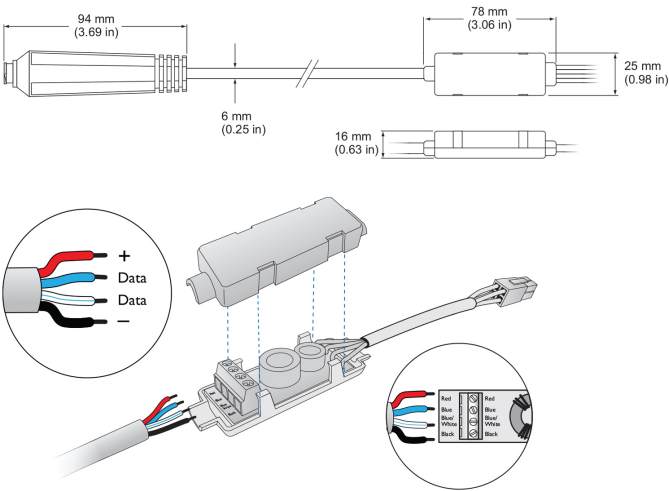

Part Numbers

Use Item Number when ordering in North America.

Leader Cable	Item Number	Item 12NC
4 Conductor Flex Leader Cable, 30.5 m (100 ft), Black, Connecting all Flex Compact or Flex Micro to sPDS-480ca or PDS-60ca Power/Data Supplies	108-000045-02	910503700698



© 2021 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com