

# 4 Conductor Flex Leader Cable

Date: \_\_\_\_\_  
Type: \_\_\_\_\_  
Firm Name: \_\_\_\_\_  
Project: \_\_\_\_\_

**15.2 m (50 ft), Black, Connecting all Flex Compact or Flex Micro to sPDS-480ca or PDS-60ca Power/Data Supplies**

## LEADER CABLE

For use with sPDS-480ca or PDS-60ca Power/Data Supplies



## Specifications

Due to continuous improvements and innovations, specifications may change without notice.


### Physical

Dimensions	15240 mm (600 in) (Length)
Weight	0.97 kg (2.14 lb)
Connections	Self-locking, male-female connector and 4-pin connector
Cable	4 conductor 1 pair stranded bare copper, 2 core stranded tinned copper
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Wire Gauge Size	Two 16 AWG solid, two 24 AWG stranded
Voltage	75 W maximum at 24 VDC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

### Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

# Dimensions

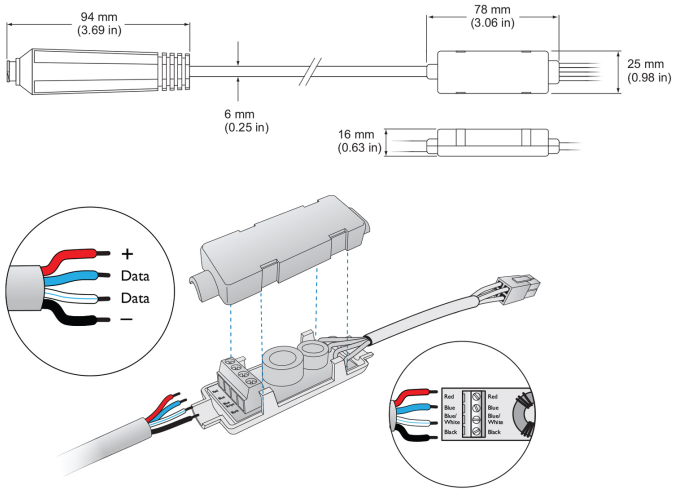

# Part Numbers

Use Item Number when ordering in North America.

## Leader Cable

4 Conductor Flex Leader Cable, 15.2 m (50 ft), Black,  
Connecting all Flex Compact or Flex Micro to sPDS-480ca or PDS-60ca Power/Data Supplies

Item Number

Item 12NC

108-000045-01

910503700697



© 2022 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics  
www.colorkinetics.com