



Date: \_\_\_\_\_ Type: \_\_\_\_\_

Firm Name: \_\_\_\_\_

Project: \_\_\_\_\_

## eW Cove QLX Powercore 4000 K, Wide Beam Angle







Cost-effective interior linear LED cove and accent fixture with solid white light

eW Cove QLX Powercore is a dimmable, linear LED fixture that provides an affordable, energy-efficient alternative to traditional cove lighting in applications requiring white light. With its low profile, rotating housing and flexible end-to-end locking power connectors, eW Cove QLX Powercore is the perfect choice for a wide range of interior retail, exhibit, hospitality, and architectural settings.

- Industry-best white-light quality and color consistency — Advances in Optibin, Philips proprietary binning optimization process, now provides color-consistency within a 2-step MacAdam ellipse across eW Cove product fixtures and manufacturing runs.
- Uncompromised Performance — Efficacies near or exceeding 100 lm/w provide optimum output without restrictions on lumen maintenance, operating temperature or warranty.

- Multiple options for design flexibility — Available in four color temperatures ranging from a warm 2700 K to a cool 4000 K. Lengths of 152 mm (6 in), 305 mm (12 in), and 1220 mm (48 in), wide and medium beam angles, and two power levels offer further design flexibility.
- Support for multiple voltages — Accepts power input of 120, 220 – 240, or 277 VAC for consistent installation and operation from line voltage in many locations.
- Smooth dimming capability — Patented DIMand technology offers smooth dimming capability with selected reverse-phase ELV-type dimmers.

For detailed product information, please refer to the eW Cove QLX Powercore Product Guide at [www.philipscolorkinetics.com/ls/essentialwhite/ewcoveqlxpc/](http://www.philipscolorkinetics.com/ls/essentialwhite/ewcoveqlxpc/)

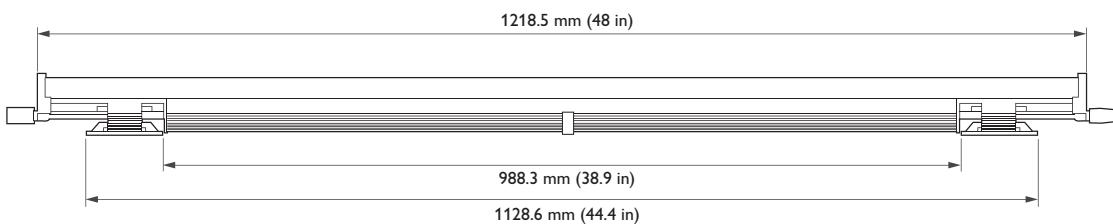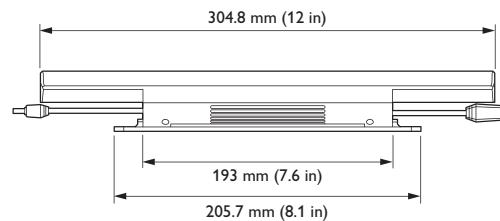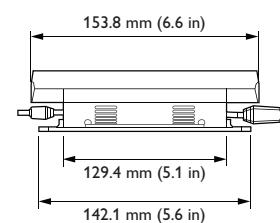

**PHILIPS**

## Specifications - 4000 K\*, Wide Beam (110° x 110°)

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	152 mm (6 in)			305 mm (12 in)			1220 mm (48 in)										
Output	Lumens†	High Power	202			422			1524									
		Low Power	160			342			1317									
	Efficacy (lm / W)	High Power	76.5			86.7			86.6									
		Low Power	76.7			89.6			100.6									
Electrical	CRI		83			83			84									
	Input Voltage		120 VAC	240 VAC	277 VAC	120 VAC	240 VAC	277 VAC	120 VAC	240 VAC	277 VAC							
	Power Consumption	High Power	2.8 W	3.5 W	3.8 W	4.0 W	5.1 W	6.0 W	19.0 W	19.0 W	19.0 W							
		Low Power	2.2 W	2.7 W	3.0 W	4.0 W	4.2 W	5.0 W	15.0 W	15.0 W	15.0 W							
Power Factor (@ 120 VAC)			.99			.99			.98									
Control	Dimming	Compatible with commercially available reverse-phase ELV-type dimmers§																
Wide Beam Dimensions (Height x Length x Width)		35 x 152 x 32 mm (1.37 x 6 x 1.25 in)			35 x 305 x 32 mm (1.37 x 12 x 1.25 in)			47 x 1220 x 38 mm (1.90 x 48 x 1.5 in)										
Weight (with optics)		116 g (0.25 lbs)			186 g (0.41 lbs)			910 g (2 lbs)										
Physical	Housing	Injection-molded plastic, white finish																
	Lens	Clear Polycarbonate																
	Fixture Connections	Integral male / female connectors																
	Temperature Ranges	-20° – 50° C (-4° – 122° F) Operating			-20° – 50° C (-4° – 122° F) Startup			-40° – 80° C (-40° – 176° F) Storage										
	Humidity	0 – 95%, non-condensing																
	Fixture Run Length	To calculate fixture run lengths and total power consumption for your specific installation, download the Configuration Calculator from <a href="http://www.philipscolorkinetics.com/support/install_tool/">www.philipscolorkinetics.com/support/install_tool/</a>																
Certification and Safety	Certification	UL / cUL, FCC Class B, CE, SAA, C-Tick, CCC																
	Environment	Damp Location, IP20																

\* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.377A.

† Lumen measurement complies with IES LM-79-08 testing procedures

‡ Refer to [www.philipscolorkinetics.com/support/appnotes/](http://www.philipscolorkinetics.com/support/appnotes/) for specific details.



DIMAND™ CK TECHNOLOGY | OPTIBIN® CK TECHNOLOGY | POWERCORE® CK TECHNOLOGY

## Lumen Maintenance

Threshold§	Ambient Temperature	Reported	Calculated
L90	@ 25°C	37,000 hrs	>47,000 hrs
	@ 50°C	17,000 hrs	>17,000 hrs
L70	@ 25°C	37,000 hrs	>175,000 hrs
	@ 50°C	37,000 hrs	>75,000 hrs

§ L<sub>xx</sub> = xx% lumen maintenance (when light output drops below xx% of initial output). All values are given at B50, or the median value where 50% of the LED population is better than the reported or calculated lumen maintenance measurement.

|| Lumen maintenance figures are based on lifetime prediction graphs supplied by LED source manufacturers. Whenever possible, figures use measurements that comply with IES LM-80-08 testing procedures.

In accordance with TM-21-11, Reported values represent the interpolated value based on six times the LM-80-80 total test duration (in hours). Calculated values represent time durations that exceed six times the total test duration.







## Ordering Information - 4000 K\*, Wide Beam (110° x 110°)

	Power Level	152 mm (6 in)		305 mm (12 in)		1220 mm (48 in)	
		Item Number	Philips 12NC	Item Number	Philips 12NC	Item Number	Philips 12NC
eW Cove QLX Powercore 120 VAC	High	523-000090-51	910503705118	523-000091-51	910503705198	523-000092-51	910503705279
	Low	523-000090-19	910503705085	523-000091-19	910503705166	523-000092-19	910503705247
eW Cove QLX Powercore 220-240 VAC	High	523-000090-59	910503705126	523-000091-59	910503705207	523-000092-59	910503705287
	Low	523-000090-27	910503705093	523-000091-27	910503705174	523-000092-27	910503705255
eW Cove QLX Powercore 220-240 VAC <i>Fixture and 10 ft (3 m) Leader Cable with terminator</i>	High	523-000090-67	910503705134	523-000091-67	910503705215	523-000092-67	910503705295
	Low	523-000090-35	910503705102	523-000091-35	910503705182	523-000092-35	910503705263
eW Cove QLX Powercore 277 VAC	High	523-000090-75	910503705142	523-000091-75	910503705223	523-000092-75	910503705304
	Low	523-000090-43	910503705110	523-000091-43	910503705190	523-000092-43	910503705271

\* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.377A.




Use Item Number when ordering in North America.

## Compatible Dimmers<sup>†</sup>

Supplier	Part Number	Description	Voltage
Philips	913701252701	Captivation Phase Dimmer DC-DPD-I-1S-101	120 VAC
Philips	913703021009	DTE310	230 VAC
Philips	912400133633	Data Adapter, DALI to ELV, DigiDim 452	230 VAC
Philips	913701252701	Captivation Phase Dimmer DC-DPD-I-1S-101	277 VAC
Philips Strand	A21 with IGBT module	A21 Dimmer Cabinet with IGBT Dimmer Module	120 VAC
Philips Strand	A21 with IGBT module	A21 Dimmer Cabinet with IGBT Dimmer Module	277 VAC
Lutron	NTELV-600	Nova T Electronic Low Voltage Dimmer	120 VAC
Lutron	PHPM-PA-DV-WH	Phase-Adaptive Power Module	120 VAC
Lutron	PHPM-PA-DV-WH	Phase-Adaptive Power Module	277 VAC

† These dimmers have been tested in our lab and found to be compatible with this product. All installations are different. We highly recommend performing a full mockup of every lighting circuit, including all luminaires and controls, to test for the desired dimming range. Visit <http://1.usa.gov/1g3cGfs> for more information.

## Accessories

Item	Housing Color	Dimensions	Item Number	Philips 12NC		For connection to standard junction box
Leader Cable (includes terminator), UL / cUL	Black	3 m (10 ft)	108-000032-10	912400130570		
Leader Cable (includes terminator), CE / CCC	Black	3 m (10 ft)	108-000032-11	912400130571		
Leader Cable (includes terminator), UL / cUL	White	3 m (10 ft)	108-000032-12	912400130572		For portable installations
Leader Cable (includes terminator), CE / CCC	White	3 m (10 ft)	108-000032-13	912400130573		
Leader Cable (includes terminator), UL, US Plug	Black	2.4 m (8 ft)	108-000032-14	912400130574		Depending on the installation's design, you may need jumper cables to add space between fixtures
Jumper Cable, UL / cUL	White	305 mm (1 ft)	108-000033-06	910503700895		
		1.5 m (5 ft)	108-000033-07	910503700896		
Jumper Cable, CE / CCC	White	305 mm (1 ft)	108-000033-08	910503700897		
		1.5 m (5 ft)	108-000033-09	910503700898		
Wiring Compartment (includes terminator)	White	2.9 x 6.8 x 16 cm (1.17 x 2.7 x 6.32 in) (H x W x L)	120-000076-01	912400130576		Can be used for direct connection to conduit
Mounting Track	White	1219 mm (4 ft)	120-000125-00	910503701788		Optional mounting track ensures straight runs of fixtures

Use Item Number when ordering in North America.

Copyright © 2016 Philips Solid-State Lighting Solutions, Inc. All rights reserved.  
Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DiMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.

DAS-000068-03 R04 01-16



Philips Color Kinetics  
3 Burlington Woods Drive  
Burlington, Massachusetts 01803 USA  
Tel 888.385.5742  
Tel 617.423.9999  
Fax 617.423.9998  
[www.philipscolorkinetics.com](http://www.philipscolorkinetics.com)