



Date: _____ Type: _____

Firm Name: _____

Project: _____

eW Fuse Powercore

4 ft (1.2 m), 12.5 W / ft, 2700 K, 10° x 60° beam angle

Linear interior LED wall grazing fixture with solid white light


With narrow and medium beams of intense white light, eW Fuse Powercore is an excellent choice for a full range of surface grazing and wall-washing applications. Its ultra-compact form factor permits installation in tight architectural spaces. Meets or exceeds performance of comparable linear fluorescent fixtures while lowering installation, energy, and maintenance costs. Offers environmentally-conscious buyers a green, energy-efficient grazing fixture with industry-leading light quality.

- Lower cost than comparable fluorescent grazing fixtures — With long useful source life and low-maintenance operation, eW Fuse Powercore represents a cost-effective alternative to traditional grazing fixtures.
- High-performance illumination and beam quality — eW Fuse Powercore is available in 1 ft (305 mm) and 4 ft (1.2 m) die-cast aluminum housings with a 10° x 60° or 30° x 60° beam angle. Interlocking connectors accommodate end-to-end placement without visible light scalloping between fixtures.
- Multiple color temperatures — Available in 2700 K, 3000 K, 3500 K, and 4000 K for applications calling for warm, neutral, or cool white light.
- Integrates patented Powercore technology — Powercore efficiently and accurately controls

power directly from line voltage, eliminating the need for an external power supply. Contractor-friendly installation lowers total system cost.

- Support for multiple voltages — Accepts power input of 100 – 277 VAC for consistent line voltage operation in a variety of locations.
- Dimming capability — Patented DIMand technology offers smooth dimming capability with selected commercially available reverse-phase ELV-type dimmers.
- Simple installation — Powercore integrated power management technology simplifies installation and allows long product runs.
- Easy mounting and positioning — With end-to-end locking power connectors that can make 180° turns, eW Fuse Powercore fixtures are easy to position in even the most challenging mounting circumstances. Fixtures rotate in 10° increments through 180° for precise aiming and color mixing. Optional mounting tracks support vertical and overhead positioning. 1 ft (305 mm) and 5 ft (1.5 m) jumper cables can add extra space between fixtures.

For detailed product information, please refer to the eW Fuse Powercore Product Guide at www.philipscolorkinetics.com/ls/essentialwhite/ewfusepc/

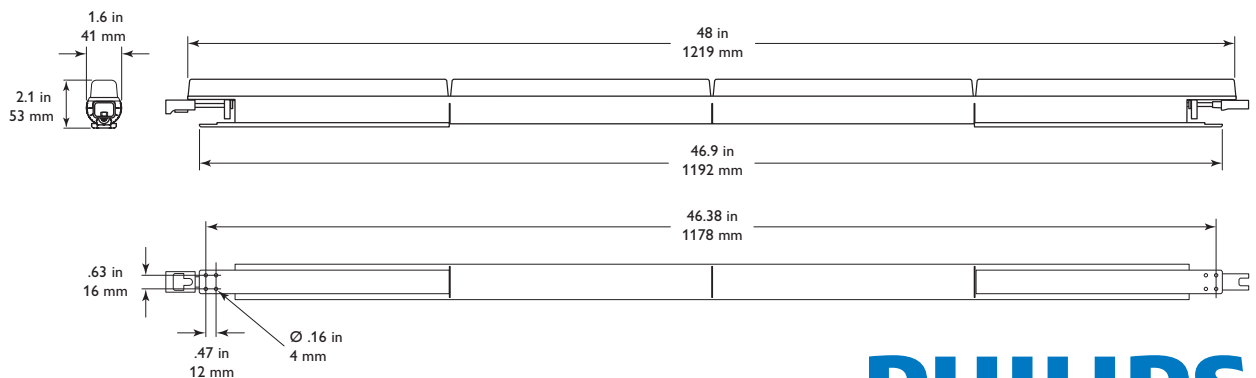

PHILIPS

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details
Output	Lumens†	2290
	Efficacy (lm / W)	48.2
	CRI	80
	Lumen Maintenance‡	50,000 hours L70 @ 25° C 37,000 hours L70 @ 50° C 90,000 hours L50 @ 25° C 80,000 hours L50 @ 50° C
	Input Voltage	100 – 277 VAC, auto-switching, 50 / 60 Hz
Electrical	Power Consumption	50 W maximum at full output, steady state
	Power Factor	> .93 @ 120 V
Control	Dimming	Compatible with selected commercially available reverse-phase ELV-type dimmers§
Physical	Dimensions (Height x Width x Depth)	2.1 x 48 x 1.6 in (53 x 1219 x 41 mm)
	Weight	4.37 lbs (1.98 kg)
	Housing	Die-cast aluminium, white powder-coated finish
	Lens	Polycarbonate
	Fixture Connections	Integral male / female connectors
	Temperature	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage
	Humidity	0 – 95%, non-condensing
	Fixture Run Lengths	To calculate fixture run lengths and total power consumption for your specific installation, download the Configuration Calculator from www.philipscolorkinetics.com/support/install_tool/
Certification and Safety	Certification	UL / cUL, FCC, Class B, CE, C-Tick, CCC
	Environment	Dry / Damp Location, IP20

* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.377A.



† Lumen measurement complies with IES LM-79-08 testing procedures.

‡ L70 = 70% lumen maintenance (when light output drops below 70% of initial output). L50 = 50% lumen maintenance (when light output drops below 50% of initial output). Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf for more information.

§ Refer to www.philipscolorkinetics.com/support/appnotes/ for specific details.

Accessories

Item	Type		Item Number	Philips 12NC
Leader Cable with terminator and strain relief	UL / cUL	10 ft (3 m)	108-000047-00	910503700972
	CE / CCC	10 ft (3 m)	108-000047-01	910503700973
Wiring Compartment with terminator	UL / cUL		120-000077-01	910503700994
Jumper Cable	UL / cUL	1 ft (305 mm)	108-000048-00	910503700974
		5 ft (1.5 m)	108-000048-01	910503700975
	CE / CCC	1 ft (305 mm)	108-000048-02	910503700976
		5 ft (1.5 m)	108-000048-03	910503700977
Terminators	10 / box		120-000099-00	910503701120
Mounting Track, White	Quantity 1	4 ft (1219 mm)	120-000124-00	910503701787



Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Photometrics

4 ft (1.2 m), 12.5 W/ ft, 2700 K, 10° x 60° beam angle

Polar Candela Distribution

