

Date: _____
Type: _____
Firm Name: _____
Project: _____

sPDS-480ca 7.5V

POWER/DATA SUPPLY

Power/data supply for large-scale Ethernet installations

sPDS-480ca 7.5 V is a power/data supply designed for large-scale Ethernet LED lighting installations using Chromasic luminaires from Color Kinetics.



- sPDS-480ca 7.5 V delivers 480 watts of output via sixteen 30-watt ports and automatically accommodates input voltages ranging from 100 VAC to 240 VAC. Short-circuit protection prevents device failure due to incorrectly wired luminaires. The standard IEC power inlet accepts both US and international power cables.
- With onboard controls, sPDS-480ca 7.5 V incorporates automatic luminaire discovery and testing, eliminating the need for additional addressing tools or software. sPDS-480ca 7.5 V features a backlit LCD for easy menu viewing.
- Housed in a 2U rack-mountable enclosure, sPDS-480ca 7.5 V includes rack handle and surface-mount brackets, for versatile mounting options.
- Over-temperature detection and selectable shutdown options protect sPDS-480ca 7.5 V against operation beyond its rated temperature specification. Variable-speed fans keep noise levels low and include serviceable air filters.

For more information, please refer to www.colorkinetics.com/lis/pds/spds480/

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Electrical

Input Voltage	100 to 240 VAC, auto-switching, 50/60 Hz*
Power Input	IEC 320 receptacle type C13, locking clamp
Maximum Input Current	8 A at 100 VAC, 7 A at 120 VAC, 3.5 A at 240 VAC
Fuse Rating	(16) 5 A, 125 V, 5 x 20 fast blow fuses
Power Output	7.5 VDC, 480 W (30 W per power port)

Connections

Data Input Source	Color Kinetics full range of Ethernet controllers, or KiNET-compatible third-party Ethernet controller
Power Output	(16) 4-pin output receptacles
Data Input	RJ-45 input connector

Compatible Luminaires

iColor Flex MX gen2	1,152 nodes
---------------------	-------------

* KiNET is the Ethernet lighting protocol from Color Kinetics.

Physical

Dimensions (Height x Width x Depth)	89 x 483 x 457 mm (3.5 x 19 x 18 in)
Weight	13 kg (28.7 lb)
Housing	2U aluminium chassis
Mounting	Rack and Surface-mountable
Finish	Black matte
Operating Temperature	-10 to 50 °C (14 to 122 °F)
Startup Temperature	-10 to 50 °C (14 to 122 °F)
Storage Temperature	-40 to 80 °C (-40 to 176 °F)
Humidity	0 to 95%, non-condensing
Cooling	(2) speed-configurable fans, with serviceable air filters
Airflow	Front panel input, back panel output
Heat Dissipation	25% of total power input


Certification and Safety

Certification	UL/cUL
Classification	UL Class 2 power supply
Environment	Dry Location, IP20




Dimensions


Rack Mount Configuration

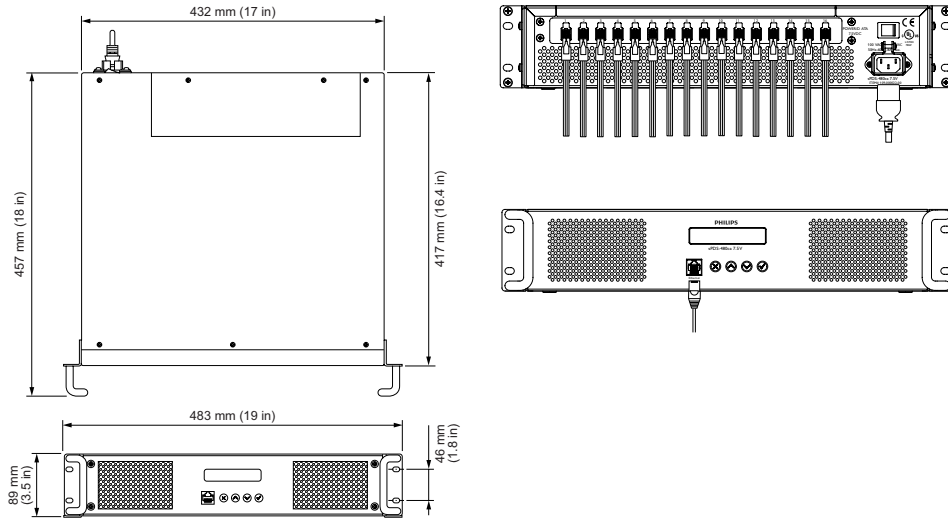

Surface Mount Configuration

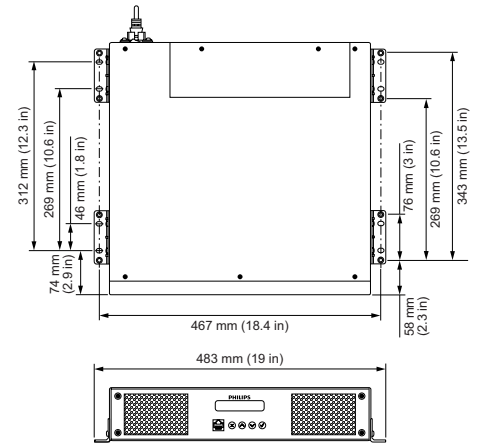

Installation Example

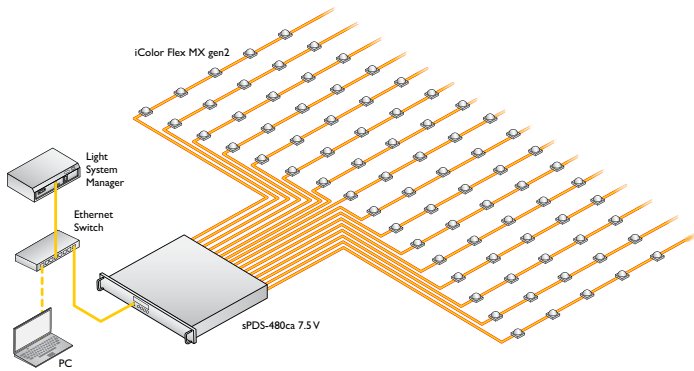

Each sPDS-480ca 7.5 V unit delivers power and data to a maximum of 1,152 nodes. The maximum number of sPDS-480ca 7.5 V units per installation varies based on the controller type and the node quantities of the luminaires.

Part Numbers

Use Item Number when ordering in North America.

Power/Data Supply

sPDS-480ca 7.5V

Power/data supply, IEC power cable, rack mount brackets, surface mount brackets, and Installation Instructions

Item Number

109-000022-00

Item 12NC

910503700107



© 2019 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com