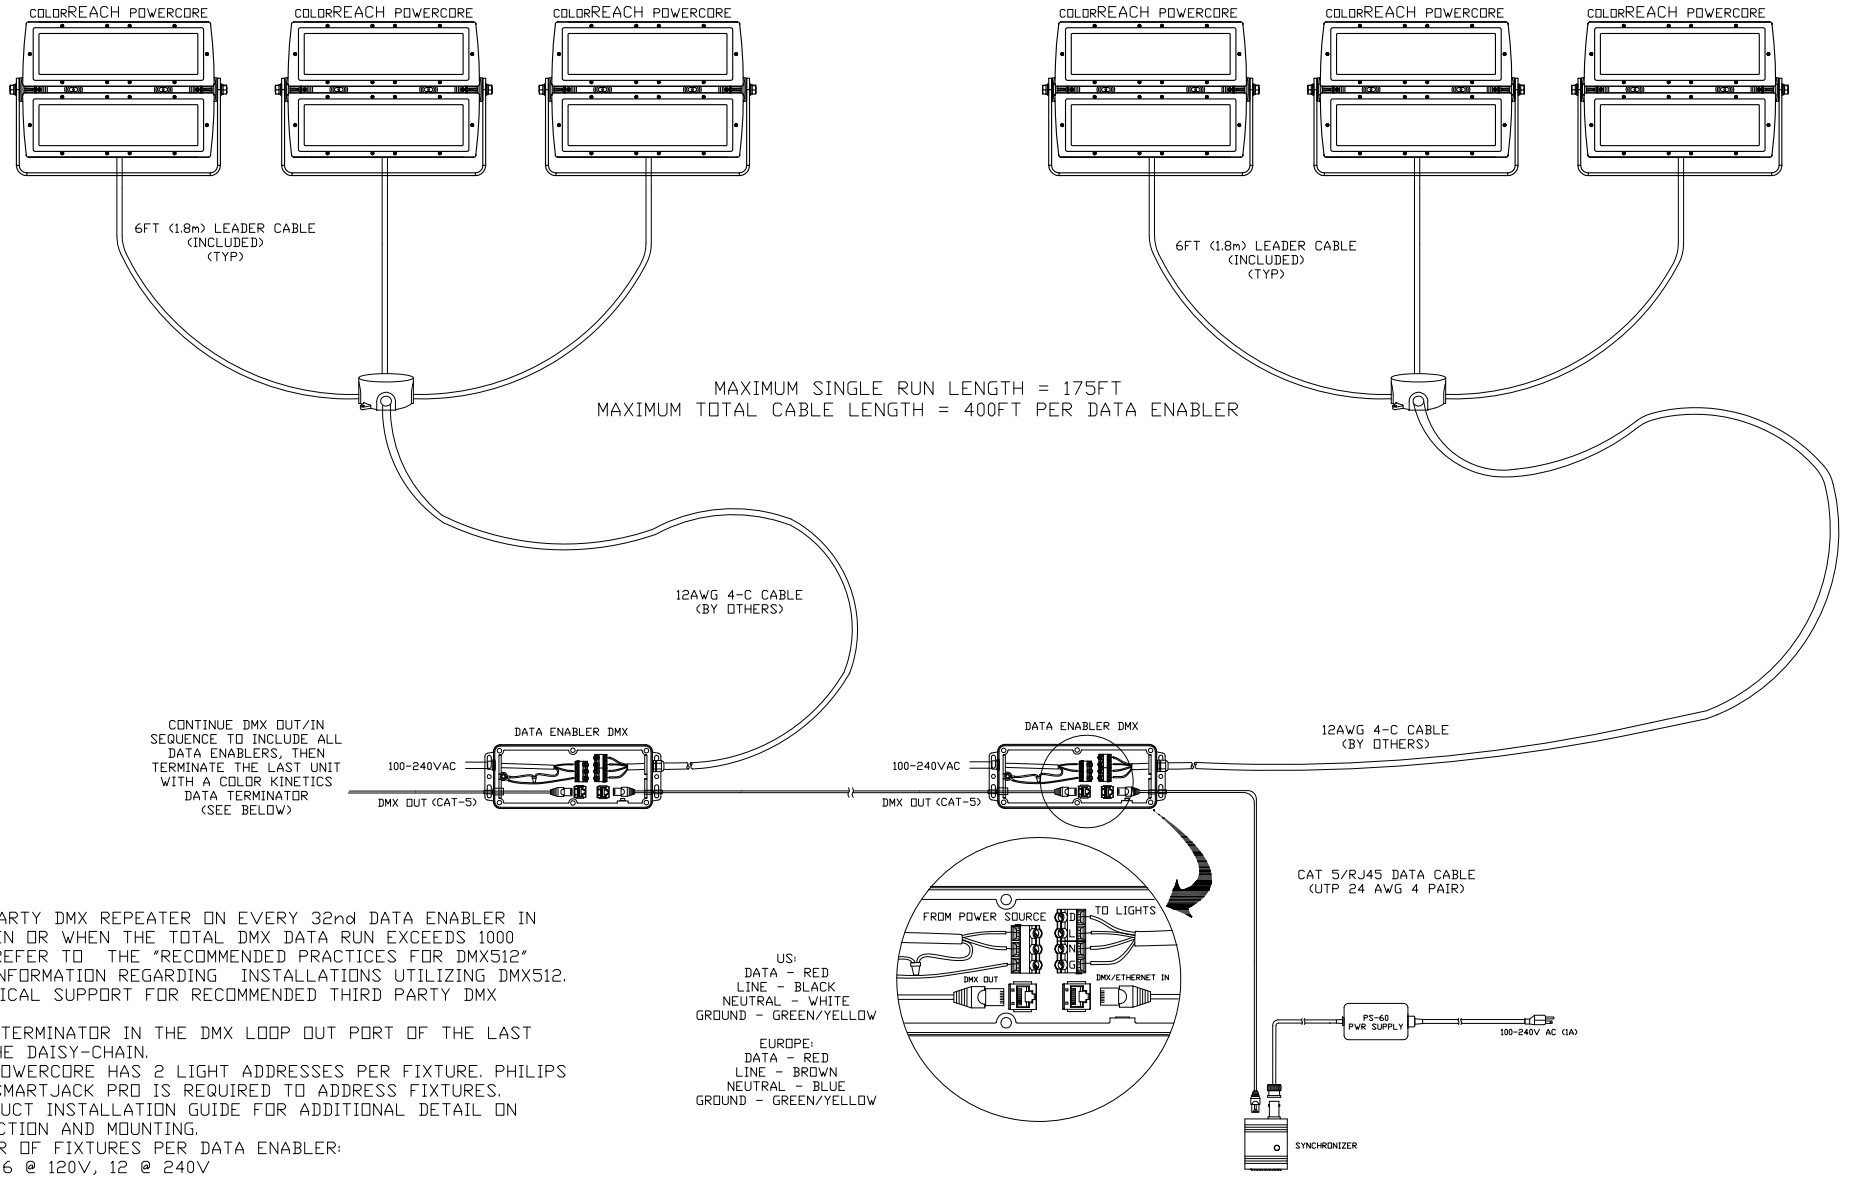

NOTE:
- USE A THIRD PARTY DMX REPEATER ON EVERY 32nd DATA ENABLER IN THE DAISY CHAIN OR WHEN THE TOTAL DMX DATA RUN EXCEEDS 1000 FEET (300m). REFER TO THE "RECOMMENDED PRACTICES FOR DMX512" FOR FURTHER INFORMATION REGARDING INSTALLATIONS UTILIZING DMX512. CONTACT TECHNICAL SUPPORT FOR RECOMMENDED THIRD PARTY DMX REPEATERS.
- PLACE A DATA TERMINATOR IN THE DMX LOOP OUT PORT OF THE LAST PDS UNIT IN THE DAISY-CHAIN.
- COLOR REACH POWERCORE HAS 2 LIGHT ADDRESSES PER FIXTURE. PHILIPS iPLAYER 3 OR SMARTJACK PRO IS REQUIRED TO ADDRESS FIXTURES.
- REFER TO PRODUCT INSTALLATION GUIDE FOR ADDITIONAL DETAIL ON FIXTURE CONNECTION AND MOUNTING.
- MAXIMUM NUMBER OF FIXTURES PER DATA ENABLER:
  -5 @ 100V, 6 @ 120V, 12 @ 240V
- SYNCHRONIZER CAN SUPPORT UP TO 12 LIGHT ADDRESSES.

PHILIPS

COPYRIGHT © 2008 PHILIPS SOLID-STATE LIGHTING SOLUTIONS, INC. ALL RIGHTS RESERVED. CHROMACORE, CHROMASIC, CK, THE CK LOGO, COLOR KINETICS, THE COLOR KINETICS LOGO, COLORBLAST, COLORBLAZE, COLORBURST, COLORGRAZE, COLORPLAY, COLORREACH, DMAND, ESSENTIALWHITE, EV, ICOLOR, ICOLOR COVE, INTELLIWHITE, IV, IPLAYER, LIGHT WITHOUT LIMITS, OPTIBIN, AND POWERCORE ARE EITHER REGISTERED TRADEMARKS OR TRADEMARKS OF PHILIPS SOLID-STATE LIGHTING SOLUTIONS, INC. IN THE UNITED STATES AND/OR OTHER COUNTRIES. ALL OTHER BRAND OR PRODUCT NAMES ARE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS. DUE TO CONTINUOUS IMPROVEMENTS AND INNOVATIONS, SPECIFICATIONS MAY CHANGE WITHOUT NOTICE.

DATA TERMINATOR

PLACE IN DMX LOOP OUT PORT OF POWER/DATA SUPPLY WHEN REQUIRED (SEE NOTES)

CAT5/RJ45 PINOUT



(VIEW FACING PINS)

TITLE:	SYSTEM WIRING DIAGRAM (TYP)
PRODUCTS:	COLOR REACH POWERCORE/DATA ENABLER/ SYNCHRONIZER/PS-60
DATE:	12-5-2008
DWG. BY:	BHG
SCALE:	NTS
REV:	
PAGE:	1 OF 1

PHILIPS COLOR KINETICS 3 BURLINGTON WOODS DRIVE BURLINGTON, MA 01803 TEL 1.888.FULL.RGB (1.888.385.5742) FAX 1.617.482.8610 WWW.COLORKINETICS.COM