



DLE L-103

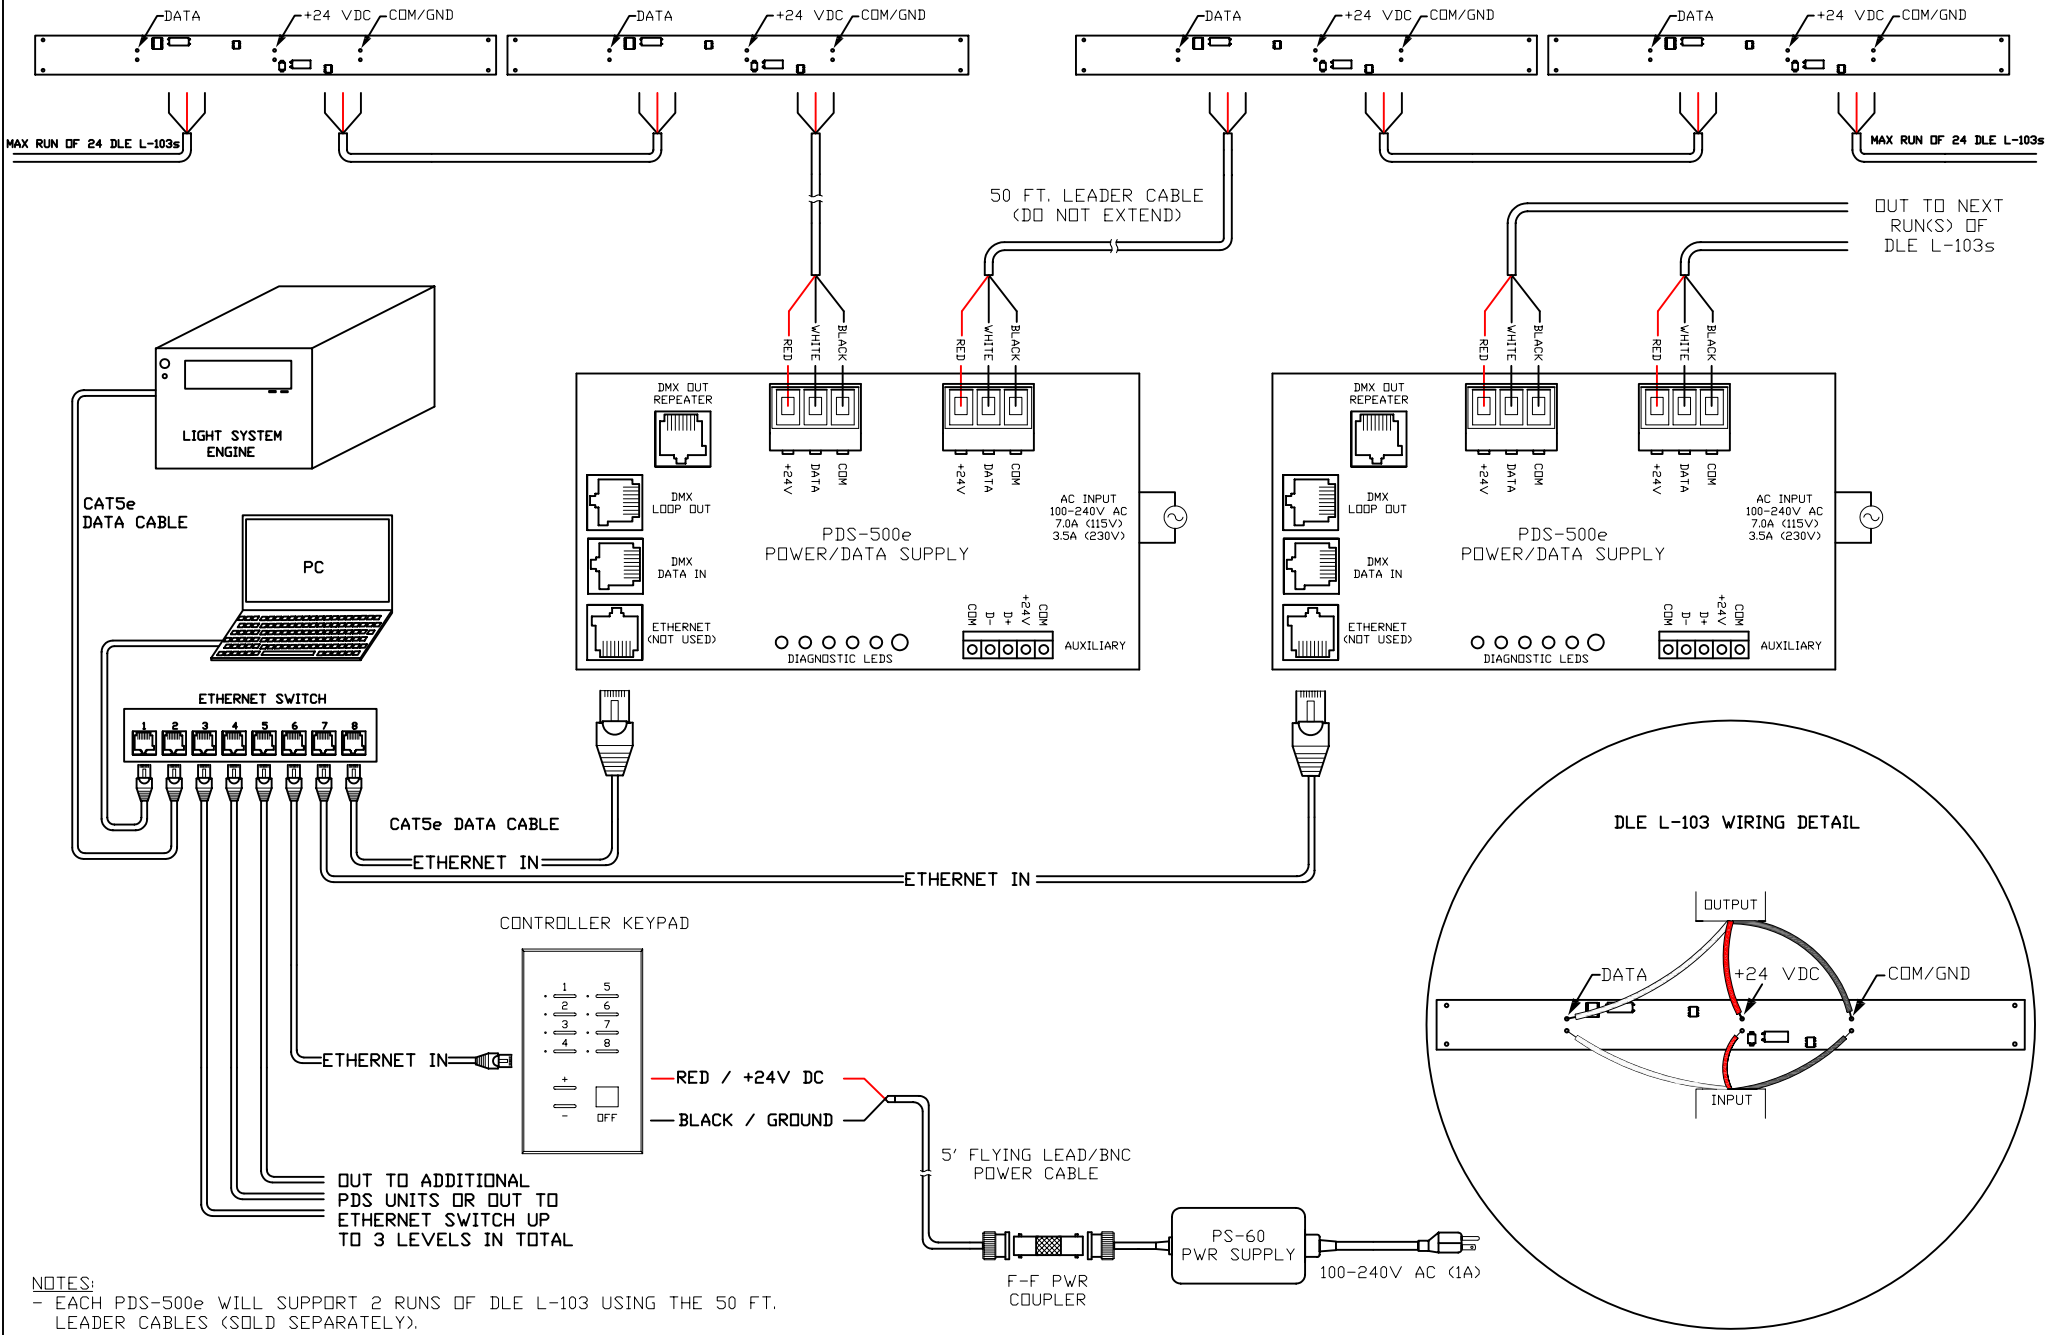


NOTES:

- EACH PDS-500e WILL SUPPORT 2 RUNS OF DLE L-103 USING THE 50 FT. LEADER CABLES (SOLD SEPARATELY).
- EACH 50 FT. LEADER CABLE SUPPORTS A MAX. OF 24 DLE L-103s, FOR A TOTAL MAX. OF 48 DLEs PER PDS-500e.
- USE A TERMINATOR AT THE END OF EACH DLE RUN.
- TOTAL MAX. LENGTH OF EACH RUN (INCLUDING DLEs) = 74 FT.
- IF USING 1' JUMPER CABLES (SOLD SEPARATELY) YOU MUST SUBTRACT AND CUT TOTAL NUMBER USED FROM LEADER CABLE, TO STAY WITHIN THE 74' MAX. RUN LENGTH.

DLE L-103 WIRING DETAIL

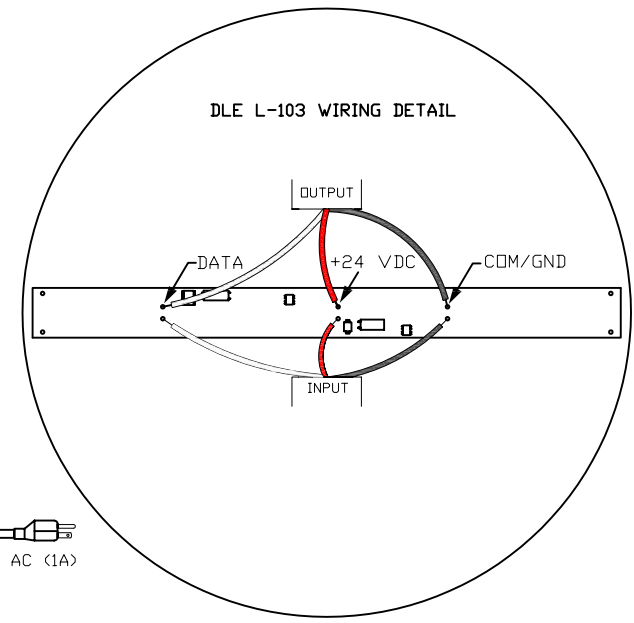

	COLOR KINETICS INCORPORATED 10 MILK STREET, SUITE 1100 BOSTON, MA 02108 888 FULL RGB 617 423 9999 WWW.COLORKINETICS.COM	TITLE: SYSTEM WIRING DIAGRAM (TYP)	DATE: DWG. BY: TC
	'FULL SPECTRUM DIGITAL LIGHTING'	PRODUCTS: DLE L-103/PDS-500e/LSM/ECK/PS-60	SCALE: NTS
			REV:
			PAGE: 1 OF 1