


MULTI SYNCHRONIZER


FLYING LEAD/BNC PWR CABLE

F-F PWR COUPLER



CAT-5 DATA CABLE
(24 AWG, 4 PAIR)
(OR USE FLYING
LEAD/RJ45 DATA CABLE)

sMOPS-150

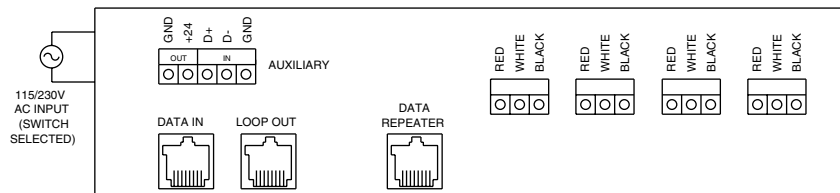


RJ45 8-PIN

CAT-5 DATA CABLE
(REPEAT LOOP TO FINAL cMOPS)

DATA TERMINATOR

sMOPS-150

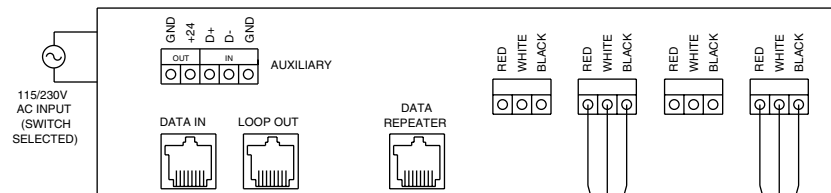


GREEN
GROUND TO ENCLOSURE

GREEN
GROUND TO ENCLOSURE

UNIFIED PWR/DATA CABLE
(MAX. 60' - INCLUDED)

C-SPLASH FIXTURE
(MAX. 4 PER sMOPS)

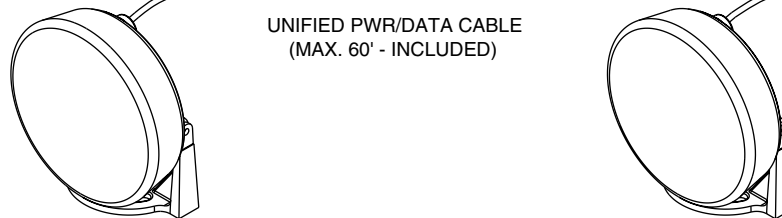

- NOTES :**
- sMOPS MAX. AC LINE DRAW = 3.2A (115V), OR 1.6A (230V).
 - USE DATA REPEATER (OUT) AFTER 31ST sMOPS, OR WHEN DATA CABLE RUN EXCEEDS 100'. WHEN USING THE DATA REPEATER, PLACE A DATA TERMINATOR IN THE LOOP OUT PORT.



COLOR KINETICS INCORPORATED
10 MILK STREET, SUITE 1100
BOSTON, MA 02108
888 FULL RGB
617 423 9999
WWW.COLORKINETICS.COM

"FULL SPECTRUM DIGITAL LIGHTING"

CLIENT:

TITLE:

MULTI SYNCHRONIZER-cSPS-sMOPS-cSPLASH

DATE:

DWG. BY: TC

SCALE: NTS

REV:

PAGE: 1 OF 1